



Traction Chain Catalog 2010 - 2011



Automotive . Light Truck . Heavy Truck . Heavy Equipment . Small Equipment . Parts & Accessories





Pewag Snow Chains #1 In Safety #1 Brand in North America and World Wide

Pewag has been manufacturing chains for over 530 years and was one of the first manufacturers to develop snow chains for the automotive industry. Located in the middle of the Alps in Graz, Austria, Pewag has exceptional experience with ice and snow conditions in the mountains. Pewag engineers have applied their experience and know-how to create newer and better traction devices that have made Pewag the #1 chain brand world-wide. All Pewag chains are manufactured in Europe under the strict specifications of Pewag Austria.

For over 35 years Pewag Inc. has continually provided the North American market with snow chains and is now the leading brand in the USA! Pewag has always provided high quality traction products that offer the user excellent performance and superior value. Pewag was the first company to introduce the "All-Square", long wearing, alloy square link chain. This chain is specifically designed to provide superior wear and traction under the most severe conditions.

Pewag "All-Square" Tire Chains outlast and outperform standard carbon steel twist link and V-Bar twist link chains at a minimum Four-to-One! How does Pewag achieve this performance?

•Highest alloy content with TITANGrip® - 63 RHC - tool like steel hardness

- •Deeper case hardness at 6% depth for maximum wear resistance
- •Unique square-link design for better traction

•Reversible for maximum wear

Pewag "All Square" is the chain of choice for many trucking companies and D.O.T.'s.

Pewag also offers a whole series of pattern style chains for light truck and heavy equipment applications. Pattern style chains provide superior performance and superb lateral traction under the most extreme conditions:

- •Highest alloy content with TITANGrip® 63 RHC tool like steel hardness
- •Deeper case hardness at 6% depth for maximum wear resistance

•Unique diagonal pattern designs for superior forward, stopping, and lateral traction •More cross sections for better traction and increased safety

•Welded rings on side-chains for additional strength and durability

Pewag pattern-style chains are the preferred brand of many professional users such as Municipalities, Counties, the U.S. Military, the Canadian Military, N.A.T.O. and D.O.T.'s.

When you think of Safety, Wear, and Value...

Think "All-Square"

For Customer Service, please call:

Traction Chain Division: 1-800-445-2895 TPC / Industrial Chain Division: 1-800-526-3924

Table of Contents

Tire Sizing Directory:		Parts & Accessories:	
Passenger Vehicle: Chains & Cables Light Truck, SUV, Van: Chains & Cables Heavy Truck, Commercial: Chains & Cables	Page 4 Page 8 Page 16	Side Chain & Cross Chain Adjusters & Tire Chain Pliers Cross Chain, Swivel & Speed Hooks Tire Chain Accessories & Repair Parts	Page 42 Page 43 Page 44 Page 45
Tire Chain Facts	Page 19	Universal & Erzberg Repair Parts	Page 46
Pewag Chains: Passenger, SUV, Light Truck Chains Light Truck Chains Heavy Truck Chains Mud & Skid Steer Chains OTR Chains Universals & Extensions Erzbergs & Extensions Compact Cross Chains Chain Inquiry Form Glacier Chains:	Page 20 Page 21 Page 22 Page 24 Page 25 Page 26 Page 28 Page 30 Page 31	Load Securement: Pewag Grade 120 Load Binders Pewag Grade 100 Load Binders Glacier Transport Chain & Load Binders New Products: Glacier Shoe Chains Pewag Utility Tote Bags Corex Ramp-Up [™] Merritt Chain Hangers Pewag Tow-To-Go Pewag Sling-In-A-Box	Page 48 Page 49 Page 50 Page 51 Page 51 Page 52 Page 52 Page 53 Page 54
Passenger Chains Light Truck Chains Heavy Truck Chains Wide Base & Small Equipment Chains OTR Chains	Page 32 Page 33 Page 34 Page 36 Page 37	Tire Chain Specification Chart: Pewag Chain Specifications Glacier Chain Specifications Chain Diameter Reference Chart	Page 56 Page 59 Page 64
Tractor: Pewag & Glacier Tractor Chains Glacier Square Link Duo Tractor Chains	Page 38 Page 39	Reference: Chain Installation Requirements Mission Statement & INSTA- <i>CHAIN</i> ™	Page 65 Page 66
Forestry & Skidder: Pewag Studded Truck 7mm & 8mm Glacier Studded Truck & Skidder Chains	Page 40 Page 41	Terms & Conditions	Page 67

Warranty

Warranty: The goods sold in this catalog are warranted free from defects in workmanship and materials for 90 days from the date of purchase.

Disclaimer of Warranties: No other warranty, expressed or implied, including warranty of merchantability or fitness for a particular purpose, is given and no affirmation of Seller, by words or action, shall constitute a warranty.

Buyer Remedies: Buyer's sole remedy for breach of any warranty, is limited exclusively to obtaining, at the discretion of the SELLER, either repair or replacement of any product sold hereunder and manufactured by SELLER. The SELLER will not pay any claim for labor on any of the products or for delays or damage by reason of their use. In no event shall the SELLER be liable for any incidental or consequential damages. Buyer must notify SELLER in writing, within 10 days of discovery of the alleged defect and within the warranty period stated above.

Return Freight Policy: After receiving authorization from Seller, product shall be returned to Seller's plant, transportation paid, within 30 Days.

Direct Correspondence To:

Customer Relations Manager - Pewag Chains, Inc. 3825 Cincinnati Avenue Rocklin, CA 95765

1-800-445-2895

Freight Policy

TERMS: Net 30 - Credit must be established with Pewag Inc. for open account billing. All others Prepaid.

FREIGHT POLICY: Less than 1,200 Ibs Or \$2000: Freight prepaid and added to invoice.

Over 1,200 lbs Or \$2,000: Freight prepaid to buyers place of business within the Continental U.S.A. (excluding Alaska & Hawaii). Prepaid shipments via carrier of Pewag's choice. Allowed prepaid shipment cost limited to the carriers tariff rates for transportation. Extra charges such as duties, broker fees, lift gate, delivery notifications, fuel surcharges, taxes, et cetera will be prepaid and invoiced to the buyer. Qualifying shipments to Alaska & Hawaii will be prepaid to the port of departure in the Continental U.S.A. under the terms of this freight policy. **Past due accounts will be charged back all allowed freight charges.**

Expedited Shipments: <u>AT THE DIRECTION AND EXPENSE OF THE CUSTOMER</u>, Pewag will expedite any shipment. Please note if the shipment does not reach its destination on time by no fault of Pewag, it is still the resposibility of the customer to pay incurred charges. Promptly inventory each shipment upon receipt. Any mis-shipment claims must be submitted within 24 hours of receipt of shipment. Claims will not be considered unless an exception is noted on the original freight bill.

PRICES: Orders will be accepted subject to prevailing price at the time of order. Prices subject to change without notice. MINIMUM CHARGES: \$100.00 per order.

SMALL ODDED EEE, \$25.00 on orders under \$100.00

SMALL ORDER FEE: \$25.00 on orders under \$100.00

RETURN MERCHANDISE: No merchandise will be accepted without prior written authorization. All returns subject to a 25% restocking charge, which will be deducted from the amount of credit memo. Return shipments must be prepaid. Unauthorized shipments will not be accepted.





Tire Chain Fit Chart

		G	Slacier		Pewag			(Slacier		Pewag
			Tw ist	Square	Sport-				Tw ist	Square	Sport-
Tire Sizes	Cable	V-Trac	Link	Link	Matik	Tire Sizes	Cable	V-Trac	Link	Link	Matik
	Chains	Cables	"PL"	"PLC"	"SMX"		Chains	Cables	"PL"	"PLC"	"SMX"
		12"	Wheels					14"	Wheels		
145/80-12	1014		PL 1110	PLC 1110		6-14	1022		PL 1122	PLC 1122	
145-12			PL 1110	PLC 1110		7-14	1030		PL 1130	PLC 1130	SMX69
155/80-12	1014	1914V	PL 1114	PLC 1114		7.5-14	1038		PL 1138	PLC 1138	
155-12	1014		PL 1114	PLC 1114		8.5-14	1034		PL 1134	PLC 1134	
165/70-12	1014		PL 1114	PLC 1114		145/70-14	1014		PL 1114	PLC 1114	
175/70-12	1014		PL 1114	PLC 1114	SMX60	145/80-14					SMX60
		13"	Wheels			155/50-14	1014	1914V	PL 1114	PLC 1114	
135/80-13			PL 1110	PLC 1110		155/65-14	1014	1914V	PL 1114	PLC 1114	
135-13			PL 1110	PLC 1110		155/70-14	1018	1918V	PL 1118	PLC 1118	SMX60
145/70-13	1014		PL 1110	PLC 1110		155/80-14					SMX62
145/80-13	1014	1914V	PL 1114	PLC 1114		155-14	1018	1918V	PL 1118	PLC 1118	
145-13	1014	1914V	PL 1114	PLC 1114		165/60-14	1014	1914V	PL 1114	PLC 1114	SMX60
155/65-13			PL 1110	PLC 1110		165/65-14	1018	1918V	PL 1118	PLC 1118	SMX60
155/70-13	1014	1914V	PL 1114	PLC 1114		165/70-14	1018	1918V	PL 1118	PLC 1118	SMX62
155/80-13	1014	1914V	PL 1114	PLC 1114	SMX60	165/75-14	1018	1922V	PL 1118	PLC 1118	SMX64
155-13	1014		PL 1114	PLC 1114	SMX60	165/80-14	1018	1922V	PL 1118	PLC 1118	SMX64
165/60-13	1014	1914V	PL 1114	PLC 1114		165-14	1022	1922V	PL 1122	PLC 1122	SMX64
165/65-13	1014	1914V	PL 1114	PLC 1114		175-14	1022	1926V	PL 1122	PLC 1122	SMX67
165/70-13	1014	1914V	PL 1114	PLC 1114	SMX60	175/60-14	1018	1918V	PL 1118	PLC 1118	SMX62
165/75-13	1014	1918V	PL 1114	PLC 1114		175/65-14	1018	1918V	PL 1118	PLC 1118	SMX62
165/80-13	1018	1918V	PL 1118	PLC 1118	SMX62	175/70-14	1026	1922V	PL 1126	PLC 1126	SMX64
165-13	1018	1918V	PL 1118	PLC 1118	SMX62	175/75-14	1020	1922V	PL 1122	PLC 1122	SMX64
175/50-13	1010		PL 1114	PLC 1114		175/80-14	1022	1926V	PL 1122	PLC 1122	SMX67
175/60-13	1014	1914V	PL 1114	PLC 1114		185-14	1030	1926V	PL 1130	PLC 1130	SMX69
175/65-13	1014	1914V 1914V	PL 1114	PLC 1114	SMX60	185/50-14	1018	1914V	PL 1118	PLC 1118	
175/70-13	1014	1914V	PL 1118	PLC 1118	SMX62	185/55-14	1018	1918V	PL 1118	PLC 1118	SMX60
175/75-13	1018	1918V 1918V	PL 1118	PLC 1118		185/60-14	1018	1922V	PL 1118	PLC 1118	SMX62
175/80-13	1018	1918V 1922V	PL 1122	PLC 1122	SMX64	185/65-14	1016	1922 V	PL 1126	PLC 1126	SMX64
175-13	1022	1922 V 1922 V	PL 1122	PLC 1122 PLC 1126	SMX64	185/70-14	1026	1926V	PL 1126	PLC 1126	SMX67
185/60-13	1020	1922 V 1918 V	PL 1118	PLC 1120	SMX60	185/75-14	1026	1926V	PL 1126	PLC 1126	SMX69
185/65-13	1018	1918V 1918V	PL 1118	PLC 1118	SMX62	185/80-14	1020	1926V	PL 1130	PLC 1130	SMX69
185/70-13	1018	1918V 1922V	PL 1126	PLC 1126	SMX64	195-14	1030	1920V 1930V	PL 1134	PLC 1130	
185/75-13	1026	1922V 1922V	PL 1126	PLC 1126	SMX64	195/55-14	1034	1930V 1922V	PL 1122	PLC 1122	SMX64
185/80-13	1020	1922V 1922V	PL 1120	PLC 1120	SMX67	195/60-14	1022	1922 V 1922 V	PL 1122	PLC 1122 PLC 1126	SMX64
185/85-13		1922 V 1926 V		PLC 1122 PLC 1130		195/65-14	1026	1922 V	PL 1126	PLC 1126	SMX67
	1030		PL 1130			195/70-14	1020	1926V	PL 1120	PLC 1120	SMX69
185-13	1026	1922V	PL 1126	PLC 1126		195/75-14			PL 1130		
195/55-13	1018		PL 1118	PLC 1118	SMX60		1030	1930V		PLC 1130	
195/60-13	1026	1922V	PL 1126	PLC 1126		205/55-14	1026	1922V	PL 1126	PLC 1126	SMX67
195/65-13	1026	1922V	PL 1126	PLC 1126	SMX64	205/60-14	1026	1926V	PL 1126	PLC 1126	SMX67
195/70-13	1026	1922V	PL 1126	PLC 1126	SMX67	205/65-14	1030	1926V	PL 1130	PLC 1130	SMX69
195/75-13	1030		PL 1130	PLC 1130	SMX67	205/70-14	1030	1930V	PL 1130	PLC 1130	SMX73
195-13	1030	1926V	PL 1130	PLC 1130		205/75-14	1034	1934V	PL 1134	PLC 1134	
205/60-13	1026	1922V	PL 1126	PLC 1126	SMX64	205-14	1034	1934V	PL 1134	PLC 1134	
205/70-13	1030	1926V	PL 1130	PLC 1130	SMX69	215/50-14	1026	1926V	PL 1126	PLC 1126	
215/50-13	1026		PL 1126	PLC 1126		215/55-14	1026	1926V	PL 1126	PLC 1126	
215/60-13	1026	1926V	PL 1126	PLC 1126		215/60-14	1030	1930V	PL 1130	PLC 1130	SMX69
215/65-13	1030	1926V	PL 1130	PLC 1130		215/65-14	1034	1930V	PL 1134	PLC 1134	SMX73
2256013	1030	1926V	PL 1130	PLC 1130	SMX67	215/70-14	1034	1934V	PL 1134	PLC 1134	SMX75
235/50-13	1034	1930V	PL 1134	PLC 1134		215/75-14	1034	1938V	PL 1138	PLC 1138	
235/60-13	1034	1930V	PL 1134	PLC 1134		215-14	1038	1938V	PL 1138	PLC 1138	
245/50-13	1034		PL 1134	PLC 1134		225/55-14	1034		PL 1134	PLC 1134	SMX69

(4)





Tire Chain Fit Chart

		(Blacier		Pewag			(.	Slacier		Pewag
			Twist	Square	Sport-				Twist	Square	Sport-
Tire Sizes	Cable	V-Trac	Link	Link	Matik	Tire Sizes	Cable	V-Trac	Link	Link	Matik
	Chains	Cables	"PL"	"PLC"	"SMX"		Chains	Cables	"PL"	"PLC"	"SMX"
	Onanio		Wheels	120	ONDE		Onains		Wheels	TEO	ONIX
225/50-14	1026	1926V	PL 1126	PLC 1126		190/65-15	1030		PL 1130	PLC 1130	SMX69
225/55-14	1020		PL 1134	PLC 1134	SMX69	195/45-15	1026		PL 1126	PLC 1126	
225/60-14	1030	1930V	PL 1130	PLC 1130	SMX73	195/50-15	1026	1922V	PL 1126	PLC 1126	SMX64
225/65-14	1034	1934V	PL 1134	PLC 1134		195/55-15	1020	1922V	PL 1122	PLC 1122	SMX67
225/70-14	1038	1938V	PL 1138	PLC 1138	SMX75	195/60-15	1022	1926V	PL 1130	PLC 1130	SMX67
225/75-14	1038	1938V	PL 1138	PLC 1138		195/65-15	1030	1930V	PL 1130	PLC 1130	SMX69
225-14	1038	1942V	PL 1138	PLC 1138		195/70-15	1030	1930V	PL 1134	PLC 1134	SMX73
235/60-14	1034	1934V	PL 1134	PLC 1134	SMX73	195/75-15	1034	1934V	PL 1134	PLC 1134	
235/70-14	1034	1942V	PL 1134	PLC 1138	SMX77	195/80-15	1034	1934V 1934V	PL 1134	PLC 1134 PLC 1134	
235/75-14	1042	1946V	PL 1142	PLC 1142		195-15	1034	1934V	PL 1134	PLC 1134	
245/50-14	1042	1940V 1926V	PL 1134	PLC 1134		205/50-15	1034	1934V 1922V	PL 1134 PL 1126	PLC 1134 PLC 1126	SMX67
245/60-14	1034	1938V	PL 1134	PLC 1134	SMX75	205/55-15		1922 V 1926 V			
245/00-14	1038	1936V 1946V	PL 1130 PL 1142	PLC 1136 PLC 1142			1026	1926V 1930V	PL 1130	PLC 1130	SMX67
255/50-14	1042		PL 1142 PL 1134	PLC 1142 PLC 1134		205/60-15	1030 1034	1930V 1930V	PL 1134 PL 1134	PLC 1134 PLC 1134	SMX69
255/50-14 255/55-14	1034	 1938V	PL 1134 PL 1138	PLC 1134 PLC 1138		205/65-15					SMX73
						205/70-15	1034	1934V	PL 1134	PLC 1134	
255/60-14 265/50-14	1038 1042	1942V 1938V	PL 1138 PL 1142	PLC 1138 PLC 1142	SMX77	205/75-15	1034	1938V	PL 1138	PLC 1138	
265/50-14					SMX77	205-15	1038	1938V	PL 1138	PLC 1138	
	1042	1946V	PL 1142	PLC 1142	5IVIA77	215/50-15	1026	1926V	PL 1126	PLC 1126	SMX67
265/50-14	1042	1938V	PL 1142	PLC 1142		215/55-15	1030		PL 1130	PLC 1130	
275/60-14	1042	 15"	PL 1142	PLC 1142		215/60-15	1034	1934V	PL 1134	PLC 1134	SMX73
7 00 45	4004		Wheels			215/65-15	1038	1938V	PL 1138	PLC 1138	SMX75
7.00-15	1034		PL 1134	PLC 1134		215/70-15	1038	1938V	PL 1138	PLC 1138	SMX75
27x8.5-15	1038		PL 1138	PLC 1138		215/75-15	1038	1942V	PL 1138	PLC 1138	
135-15	1018		PL 1118	PLC 1118		215/85-15	1042	1946V	PL 1144	PLC 1144	
145/70-15	1018		PL 1118	PLC 1118		220/45-15	1026		PL 1126	PLC 1126	
145/80-15	1018		PL 1118	PLC 1118	SMX62	225/50-15	1030	1930V	PL 1130	PLC 1130	SMX69
145-15	1018		PL 1118	PLC 1118	SMX62	225/55-15	1034	1934V	PL 1134	PLC 1134	SMX75
155/60-15	1014		PL 1118	PLC 1118	SMX60	225/60-15	1034	1934V	PL 1134	PLC 1134	SMX75
155/65-15	1018		PL 1118	PLC 1118	SMX62	225/65-15	1038	1938V	PL 1138	PLC 1138	SMX75
155/70-15	1018		PL 1118	PLC 1118	SMX62	225/70-15	1038	1942V	PL 1138	PLC 1138	
155/80-15	1022	1922V	PL 1122	PLC 1122	SMX64	225/75-15	1042	1942V	PL 1142	PLC 1142	
155-15	1022		PL 1122	PLC 1122		225/80-15	1042	1946V	PL 1142	PLC 1142	
165/60-15	1018		PL 1118	PLC 1118	SMX60	225-15	1042	1946V	PL 1142	PLC 1142	
165/65-15	1022	1922V	PL 1122	PLC 1122	SMX62	235/55-15	1034		PL 1134	PLC 1134	SMX75
165/70-15	1022	1922V	PL 1122	PLC 1122	SMX64	235/60-15	1038	1938V	PL 1138	PLC 1138	SMX75
165/80-15	1022	1926V	PL 1122	PLC 1122	SMX67	235/65-15	1042	1942V	PL 1142	PLC 1142	
165-15	1022		PL 1122	PLC 1122		235/70-15	1042	1946V	PL 1142	PLC 1142	
175/55-15					SMX60	235/75-15	1042	1946V	PL 1142	PLC 1142	
175/60-15					SMX62	235-15	1042		PL 1142	PLC 1142	
175/65-15					SMX64	240/45-15	1038		PL 1138	PLC 1138	
175/70-15	1022	1926V	PL 1122	PLC 1122	SMX67	245/50-15	1038	1934V	PL 1138	PLC 1138	
175/75-15	1022		PL 1122	PLC 1122		245/60-15	1042	1942V	PL 1142	PLC 1142	SMX77
175-15	1030	1930V	PL 1130	PLC 1130		245/65-15	1042	1946V	PL 1142	PLC 1142	
180/65-15	1022		PL 1122	PLC 1122		245/70-15	1042	1946V	PL 1144	PLC 1144	
185/50-15	1018		PL 1118	PLC 1118	SMX62	255/45-15	1038		PL 1138	PLC 1138	
185/55-15	1022	1922V	PL 1122	PLC 1122	SMX64	255/55-15	1042		PL 1142	PLC 1142	SMX73
185/60-15	1026	1922V	PL 1126	PLC 1126	SMX67	255/60-15	1042	1946V	PL 1142	PLC 1142	SMX77
185/65-15	1026	1926V	PL 1126	PLC 1126	SMX67	255/65-15	1042		PL 1142	PLC 1142	
185/70-15	1030	1926V	PL 1130	PLC 1130	SMX69	255/70-15	1046		PL 1144	PLC 1144	
185/75-15	1030	1930V	PL 1130	PLC 1130		265/50-15	1042	1942V	PL 1142	PLC 1142	
185/80-15					SMX73	265/60-15	1042	1946V	PL 1142	PLC 1142	
185-15	1034	1930V	PL 1134	PLC 1134		265/75-15	1046		PL 1146	PLC 1146	

(5)





Tire Chain Fit Chart

		(Slacier		Pewag			(Glacier		Pewag
			Tw ist	Square	Sport-				Tw ist	Square	Sport-
Tire Sizes	Cable	V-Trac	Link	Link	Matik	Tire Sizes	Cable	V-Trac	Link	Link	Matik
	Chains	Cables	"PL"	"PLC"	"SMX"		Chains	Cables	"PL"	"PLC"	"SMX"
		15"	Wheels	•					Wheels		
275/50-15	1042		PL 1142	PLC 1142		245/75-16	1046		PL 1144	PLC 1144	
275/60-15	1046		PL 1144	PLC 1144		255/50-16	1042	1942V	PL 1142	PLC 1142	
285/40-15	1038		PL 1138	PLC 1138		255/55-16	1042	1942V	PL 1142	PLC 1142	
295/50-15	1046		PL 1144	PLC 1144		255/60-16	1042		PL 1144	PLC 1144	
FR/78-15	1038		PL 1138	PLC 1138		255/65-16		1942V			
GR/78-15	1038		PL 1138	PLC 1138		255/70-16	1046		PL 1146	PLC 1146	
01070-13	1030		Wheels	120 1130				 1942V	PL 1140 PL 1142	PLC 1140 PLC 1142	
155/80-16	1022		PL 1122	PLC 1122		265/50-16 275/70-16	1042 1042		PL 1142 PL 1144	PLC 1142 PLC 1144	
175/75-16	1022		PL 1122	PLC 1122		275/70-10	1042		Wheels	FLC 1144	
185/50-16			FL 1122		SMX64	205/40 47	4000			DLC 1120	<u>CMVC7</u>
185/70-16	1030		 PL 1130	PLC 1130		205/40-17	1026		PL 1130	PLC 1130	SMX67
						205/45-17	1034		PL 1134	PLC 1134	SMX69
195/45-16	1026		PL 1126	PLC 1126	SMX64	205/50-17	1038		PL 1138	PLC 1138	SMX73
195/50-16	1026	1922V	PL 1126	PLC 1126	SMX67	215/40-17	1030		PL 1134	PLC 1134	SMX69
195/55-16	1030		PL 1130	PLC 1130	SMX69	215/45-17	1034		PL 1134	PLC 1134	SMX69
195/60-16	1030	1930V	PL 1130	PLC 1130	SMX69	215/50-17	1038	1934V	PL 1138	PLC 1138	SMX73
195/65-16	1030	1934V	PL 1130	PLC 1130	SMX73	215/55-17	1038		PL 1138	PLC 1138	SMX77
195/80-16	1042		PL 1142	PLC 1142		215/60-17	1038		PL 1138	PLC 1138	SMX77
205/40-16	1026		PL 1130	PLC 1130		225/35-17	1026		PL 1126	PLC 1126	
205/45-16	1026		PL 1130	PLC 1130	SMX67	225/40-17	1030		PL 1130	PLC 1130	
205/50-16	1034	1926V	PL 1134	PLC 1134	SMX69	225/45-17	1034		PL 1134	PLC 1134	SMX73
205/55-16	1034	1930V	PL 1134	PLC 1134	SMX73	225/50-17	1034	1938V	PL 1134	PLC 1134	SMX75
205/60-16	1034	1934V	PL 1138	PLC 1138	SMX73	225/55-17	1038		PL 1142	PLC 1142	SMX77
205/65-16	1038	1938V	PL 1138	PLC 1138	SMX75	225/60-17	1038		PL 1138	PLC 1138	
205/70-16	1038	1938V	PL 1138	PLC 1138	SMX75	225/65-17	1042		PL 1142	PLC 1142	
205/80-16	1042	1942V	PL 1142	PLC 1142		235/40-17	1034		PL 1134	PLC 1134	
215/40-16	1030		PL 1130	PLC 1130	SMX64	235/45-17	1038		PL 1138	PLC 1138	SMX75
215/45-16	1034		PL 1134	PLC 1134		235/50-17	1038		PL 1138	PLC 1138	SMX75
215/50-16	1034	1934V	PL 1134	PLC 1134	SMX69	235/55-17	1042	1942V	PL 1142	PLC 1142	SMX78
215/55-16	1034	1934V	PL 1134	PLC 1134	SMX73	235/60-17	1042		PL 1142	PLC 1142	
215/60-16	1034	1934V	PL 1134	PLC 1134	SMX75	235/65-17	1046	1946V	PL 1146	PLC 1146	SMX80
215/65-16	1038	1938V	PL 1138	PLC 1138	SMX75	235/70-17			PL 1146	PLC 1146	
215/70-16	1038	1942V	PL 1138	PLC 1138		245/35-17	1034		PL 1134	PLC 1134	
215/75-16	1042		PL 1142	PLC 1142		245/40-17	1038		PL 1138	PLC 1138	
225/40-16	1030		PL 1134	PLC 1134		245/45-17	1038		PL 1142	PLC 1142	SMX77
225/45-16	1034	1938V	PL 1134	PLC 1134	SMX69	245/50-17	1038		PL 1138	PLC 1138	
225/50-16	1034	1934V	PL 1134	PLC 1134	SMX73	245/55-17	1042		PL 1142	PLC 1142	
225/55-16	1038	1938V	PL 1138	PLC 1138	SMX75	245/65-17	1042		PL 1144	PLC 1144	
225/60-16	1038	1942V	PL 1138	PLC 1138	SMX75	255/40-17	1040		PL 1138	PLC 1138	SMX75
225/65-16	1038	1942V	PL 1138	PLC 1138	SMX77	255/45-17	1038			PLC 1130 PLC 1142	
225/70-16	1038	1942 V	PL 1142	PLC 1142					PL 1142		
225/75-16	1038	1946V 1946V	PL 1142	PLC 1142 PLC 1142		255/50-17	1042		PL 1142	PLC 1142	
235/50-16	1042		PL 1134		SMX75	255/55-17	1042		PL 1142	PLC 1142	
				PLC 1134		265/40-17	1042		PL 1144	PLC 1144	
235/55-16	1038	1942V	PL 1138	PLC 1138	 SMV77	265/60-17	1042		PL 1142	PLC 1142	
235/60-16	1042	1942V	PL 1142	PLC 1142	SMX77	275/40-17	1042	1948V	PL 1142	PLC 1142	
235/65-16	1042		PL 1142	PLC 1142		275/55-17	1046		PL 1146	PLC 1146	
235/70-16	1042		PL 1144	PLC 1144		285/35-17	1042		PL 1142	PLC 1142	
235/75-16	1046		PL 1144	PLC 1144		285/40-17	1042		PL 1142	PLC 1142	
245/45-16	1038	1938V	PL 1138	PLC 1138	SMX73	315/35-17	1042		PL 1144	PLC 1144	
245/50-16	1038	1942V	PL 1142	PLC 1142	SMX75				Wheels		
245/55-16	1038	1942V	PL 1142	PLC 1142	SMX77	205/60-17.5			PL 1130	PLC 1130	
245/60-16	1042	1946V	PL 1142	PLC 1142		215/55-17.5	1034		PL 1134	PLC 1134	
245/70-16	1046		PL 1144	PLC 1144							

6





Pewag

Sport-

Matik

"SMX"

Tire Chain Fit Chart

		0	Slacier		Pewag			
			Tw ist	Square	Sport-			
ire Sizes	Cable	V-Trac	Link	Link	Matik	Tire Sizes	Cable	V-Trac
	Chains	Cables	"PL"	"PLC"	"SMX"		Chains	Cables
		18"	Wheels					20
5/35-18	1034		PL 1134	PLC 1134		245/40-20	1042	
15/40-18	1038		PL 1138	PLC 1138		255/35-20	1042	
5/35-18	1034		PL 1134	PLC1134		265/35-20	1042	
15/40-18	1038		PL 1138	PLC 1138		275/35-20	1042	
15/45-18	1038		PL 1138	PLC 1138		285/30-20	1042	
15/55-18	1038		PL 1142	PLC 1142		295/40-20	1046	
25/35-18	1034		PL 1134	PLC 1134				Met
25/40-18	1038	1938V	PL 1138	PLC 1138	SMX73	165/70-360	1018	
25/45-18	1038		PL 1138	PLC 1138	SMX75	165/70-365	1018	1922\
25/50-18	1042		PL 1142	PLC 1142		185/65-365	1026	1926\
25/60-18	1046		PL 1146	PLC 1146		185/70-365	1030	1930\
25/65-18	1046		PL 1146	PLC 1146		200/60-365	1022	
35/40-18	1040		PL 1142	PLC 1142	SMX75	180/65-390	1022	
35/45-18	1042		PL 1142	PLC 1142		185/65-390	1026	1926\
35/50-18	1042		PL 1142	PLC 1142	SMX78	190/65-390	1020	1930
35/55-18	1042	 1946V	PL 1142 PL 1146	PLC 1142 PLC 1146	SIVIA70	165/70-360	1030	
	1046	1946V	PL 1146 PL 1146	PLC 1146 PLC 1146	SMX80	165/70-365	1018	1922\
35/60-18		19467	PL 1146 PL 1146		5111280	185/65-365	1018	19220
35/65-18	1046			PLC 1146		185/70-365	1026	1926V 1930V
45/35-18	1034		PL 1134	PLC 1134				
15/40-18	1038	1938V	PL 1138	PLC 1138		200/60-365	1022	
5/45-18	1042	1942V	PL 1142	PLC 1142	SMX77	180/65-390	1026	
45/50-18	1042		PL 1144	PLC 1144	SMX79	185/65-390	1026	1926V
5/35-18	1042		PL 1142	PLC 1142		190/65-390	1030	1930V
55/40-18	1038		PL 1138	PLC 1142	SMX77	200/60-390	1030	
55/45-18	1042	1942V	PL 1144	PLC 1144		205/60-390	1030	
55/55-18	1046		PL 1146	PLC 1146		220/55-390	1034	
65/35-18	1042	1942V	PL 1142	PLC 1142	SMX77	220/60-390	1030	1930V
5/40-18	1042	1942V	PL 1142	PLC 1142		220/65-390	1038	
75/35-18	1042	1946V	PL 1142	PLC 1142				
75/40-18	1046	1946V	PL 1146	PLC 1146		10 C	2.96	1
75/45-18	1046		PL 1146	PLC 1146				-
35/30-18	1046		PL 1146	PLC 1146			-	
35/35-18	1046	1946V	PL 1146	PLC 1146			67	1
35/40-18	1046		PL 1146	PLC 1146				-
95/30-18	1046		PL 1146	PLC 1146		1	The second second	1 1
5/35-18	1046		PL 1146	PLC 1146			1	1
			Wheels				1000	N
15/35-19	1034	1934V	PL 1134	PLC 1134				10
25/35-19	1034		PL 1134	PLC 1134			31	
35/35-19	1038		PL 1138	PLC 1138		200	Y III	-
35/55-19	1046		PL 1146	PLC 1146		Station of the local division of the		
45/30-19	1034	1934V	PL 1134	PLC 1134		and the second	he la	100
45/35-19	1042		PL 1142	PLC 1142		1	SAR.	
15/40-19	1042		PL 1142	PLC 1142		Statement of the local division in the local	and the second	110
55/35-19	1042		PL 1142	PLC 1142			- International	A
55/40-19	1042		PL 1144	PLC 1144		To contraction	and all starting	
65/30-19	1042		PL 1144	PLC 1144		N. COST	THE R	- Andrews
75/35-19	1042	1946V	PL 1146	PLC 1144			Stand and	San State of
75/40-19	1040		PL 1146	PLC 1140 PLC 1146				State and
35/35-19	1046		PL 1146	PLC 1146		11 11 11 11	Selfer Set	
5/55-18	1040		Wheels	1 LO 1140		-	1000	- AND
5/50-20	1046					PRAIL PRAIL & France	ETHON IT THE ME	Clasier D
JU-20	1046		PL 1146	PLC 1146		J	(Glacier Pa

(7)



Square

Link

"PLC"

PLC 1144

PLC 1144

PLC 1142

PLC 1142

PLC 1144

PLC 1146

PLC 1118

PLC 1118

PLC 1126

PLC 1130

PLC 1122

PLC 1126

PLC 1126

PLC 1130

PLC 1118

PLC 1118

PLC 1126

PLC 1130

PLC 1122

PLC 1126

PLC 1126

PLC 1130

PLC 1130

PLC 1130

PLC 1134

PLC 1130

PLC 1138





Tire Chain Fit Chart

	Pev	vag				Glacier				Pev	vaq	Glad	cier	Pewag	/Glacier	Pe	waq
		Truck				ght Truc	k				Base	Wide		Mud S			tern
Tire Size	Square	Square	Tw ist	Square	V-bar	Tw ist	Square	Cables	V-Trac	Square	Square	Tw ist	Tw ist	Square	Square	BrentaC	
	Singles	Duals	Singles	Singles	Singles	Duals	Duals	Singles	Cables	Singles	Duals	Singles	Duals	Singles	Duals	4x4	
	2200	4200	2200	2300	2800	4200	4300	2000	2100	3200	3200	3200	3200	2400	4400	"XMR"	"ASV"
							13"	Whe	els								
7.00-13	E2201		H2201														
							14"	Whe	els								
6.00-14	E2201		H2201														
7.00-14	E2209		H2209					2009									
27x8.5-14	E2211		H2211											2433			
27x9.5-14	E2216		H2216	H2316	H2816			2016						2433			
28x8.5-14	E2209		H2209					2009									
29x9.5-14	E2216		H2216	H2316	H2816			2016									
185/75-14	E2201		H2201														
185-14	E2201		H2201														
195/75-14	E2209		H2209					2009									
205/70-14	E2209		H2209					2009									
205/75-14	E2209		H2209					2009									
215/70-14	E2209		H2209					2009									
215/75-14	E2216		H2216	H2316	H2816			2016									
215/75-14	E2216		H2216	H2316	H2816			2016									
225/60-14	E2209		H2209					2009									
225/70-14	E2216		H2216	H2316	H2816			2009									
225-14	E2219		H2219	H2319	H2819			2019								XMR77	
235/70-14	E2229		H2229	H2329	H2829			2019								XMR77	
245/70-14	E2229		H2229	H2329				2029									
255/60-14	E2229		H2229	H2329	H2829			2029								XMR77	
265/60-14	E2229		H2229	H2329				2029								XMR77	
275/60-14	E2229		H2229	H2329	H2829			2029									
ER78-14	E2209		H2209 H2209					2009									
7-14.5	E2209							2009									
8-14.5 9-14.5	E2216	E4216	H2216	H2316 H2316	H2816	H4216		2016 2016									
	E2216	E4216	H2216		H2816	H4216											
27x8.5-14.5	E2216		HZ210	H2316	FIZ010		 15"	2016 Whe									
6.7-15	E2216		H2216	H2316	H2816		15	2016									ASV75
7-15	E2210		H2219	H2319				2010		E3237		H3237		2437			ASV75 ASV77
7-15	E2219			H2319				2019	2117 V	E3237				2437			A3V11
7.5-15		E4219							2119V		E3251		H3251				ASV80
8.25-15	E2237	E4237		H2337		H4237			2113V					2433			
9-15	E2237	E4237		H2337		H4237			2129V								
10-15	E2239	E4239	H2239				H4339		2129V					2441	4435	XMR81	
11-15	E2228			H2328						E3227		H3227		2441			
12-15										E3229		H3229					
14x36.5-15										E3255		H3255					
14-15										E3255		H3255					
27x9.5-15	E2229	E4229	H2229	H2329	H2829	H4229		2029						2433			
27x10.5x15	E3210		H3210					3010									
28x8.5-15	E2229		H2229	H2329	H2829			2029									
29x9.5-15	E2229			H2329	H2829			2029									
29x10.5-15					H3810					E3210		H3210					
29x11.5-15	E3210		H3210		H3810					E3227		H3227					
29x12.5-15										E3227		H3227					
30x7.5-15	E2229		H2229	H2329	H2829			2029						2435			
30x9.5-15	E2229	E4229	H2229	H2329	H2829	H4229		2029	2119V					2437		XMR80	ASV80

8





Tire Chain Fit Chart

	Pev	wag				Glacier				Pev	vag	Glad	cier	Pewag	/Glacier	Pe	vag
	Light	Truck			Lig	ght Truc	k			Wide	Base	Wide	Base	Mud S	ervice	Pat	ern
Tire Size	Square	Square	Tw ist	Square	V-bar	Tw ist	Square	Cables	V-Trac	Square				Square	Square	BrentaC	
	Singles	Duals	Singles	Singles	Singles	Duals	Duals	Singles	Cables	Singles	Duals	Singles	Duals	Singles	Duals	4x4	
	2200	4200	2200	2300	2800	4200	4300	2000	2100	3200	3200	3200	3200	2400	4400	"XMR"	"ASV"
							15"	Whe	els								
30x10.5-15					H3810					E3210		H3210		2437		XMR80	
31x9.5-15								3027	2119V	E3227		H3227					
31x10.5-15	E3210		H3210		H3810			3010	2121V	E3227		H3227		2437		XMR81	ASV81
31x11.5-15	E2228	E4228	H2228	H2328		H4228		2029	2121V	E3227		H3227				XMR82	ASV82
31x12.5-15	E3210		H3210		H3810			3010		E3227		H3227		2437			
31x13.5-15								3029		E3229		H3229					
31x15.5-15										E3237		H3237					
32x9.5-15								3027		E3227		H3227					
32x11.5-15	E2228	E4228	H2228	H2328	H2828	H4228		2028	2114V	E3227		H3227		2439		XMR82	ASV82
32x12.5-15								3029	2114V	E3229		H3229					
33x9.5-15								3027		E3227		H3227					
33x10.5-15	E2228		H2228	H2328	H2828			2028		E3229		H3229					
33x12.5-15								2033	2114V	E3229		H3229					
33x13.5-15								2033		E3229		H3229					
33x14-15								2033		E3229		H3229					
33x14.5-15	E2226		H2226							E3231		H3231					
34x9.5-15								3027		E3227		H3227					
35x10.5-15	E2226		H2226					2037		E3231		H3231					
35x12.5-15	E2226		H2226					2037		E3235		H3235		2441			
35x13.5-15	E2226		H2226					2037		E3235		H3235		2441			
35x14-15	E2226		H2226					2037		E3235		H3235					
35x14.5-15										E3251		H3251					
35x15-15										E3251		H3251					
35x15.5-15										E3237		H3237					
36x12.5-15	E2226		H2226							E3235		H3235					
36x13.5-15	E2226		H2226							E3235		H3235					
36x14-15										E3251		H3251					
36x14.5-15										E3251		H3251					
36x15.5-15										E3251		H3251					
37x12.5-15										E3235		H3235					
37x14.5-15										E3251		H3251					
38x12.5-15										E3259		H3259					
38x14.5-15										E3259		H3259					
38x15-15										E3259		H3259					
44x18.5-15										E3269		H3269					
195/65-15	E2201		H2201														
195/75-15	E2209		H2209					2009						2433			
195/80-15																	
195-15	E2209		H2209					2009						2433			
205/75-15	E2209		H2209					2009						2433			
215/70-15																	
215/75-15	E2216				H2816				2115V					2433		XMR77	
215/80-15																XMR79	
215-15	E2216			H2316				2016						2433		XMR79	
225/70-15	E2216			H2316					2115V					2433		XMR76	
225/75-15	E2216			H2316					2115V					2435		XMR77	
225/80-15	E2216			H2316					2115V							XMR79	
225-15	E2216			H2316				2016									ASV78
235/70-15	E2216			H2316					2117V					2435		XMR79	
235/75-15	E2219			H2319		H4219			2117V					2435		XMR79	
235-15	E2219	E4219		H2319		H4219		2019						2437			
245/60-15	E2216		H2216	H2316	H2816			2016						2435		XMR79	ASV79





	Pev	0				Glacier					wag	Glad		0	/Glacier	Pe	wag
	Light					ght Truc					Base	Wide			ervice		tern
Tire Size	Square	Square	Tw ist	Square	V-bar	Tw ist			V-Trac			Tw ist				Brenta	1
	Singles	Duals	Singles	Singles	Singles	Duals	Duals	Singles	Cables	Singles	Duals	Singles	Duals	Singles	Duals	4x4	
	2200	4200	2200	2300	2800	4200	4300	2000	2100	3200	3200	3200	3200	2400	4400	"XMR"	"ASV"
							15"	Whe	els								
245/70-15	E2219	E4219	H2219	H2319	H2819	H4219		2019	2115V					2435		XMR79	ASV79
245/75-15	E2219	E4219	H2219	H2319	H2819	H4219		2019	2121V					2437			
245/85-15	E2228	E4228	H2228	H2328	H2828	H4228		2028						2441			
255/60-15	E2229	E4229	H2229	H2329	H2829	H4229		2029	2119V							XMR77	ASV77
255/65-15	E2229	E4229	H2229	H2329	H2829	H4229		2029	2129V								
255/70-15	E2229	E4229	H2229	H2329	H2829	H4229		2029	2119V					2437		XMR80	ASV80
255/75-15	E2228	E4228	H2228	H2328	H2828	H4228		2028	2127V					2439		XMR81	ASV81
255/80-15								3010		E3210		H3210				XMR81	
255/85-15	E2228	E4228	H2228	H2328	H2828	H4228			2114V			H3227		2439			
255-15																XMR81	
265/60-15	E2229		H2229	H2329	H2829			2029									
265/65-15	E2229		H2229	H2329	H2829			2029									
265/70-15	E2221		H2221		H2821			2021	2119V					2439	4439	XMR81	ASV81
265/75-15	E2221		H2221		H2821			2021	2121V			H3227		2439			ASV81
275/60-15	E2229	E4229	H2229	H2329	H2829	H4229		-						2437			ASV80
275/65-15																XMR81	
275/70-15																XMR81	
275/75-15	E2228		H2228	H2328	H2829			2028									
285/70-15	E2228			H2328	H2829			2028	2114								
285/75-15								2020	2114	E3229		H3229					
295/50-15	E2229		H2229	H2329	H2829			2029				1.5229					
305/50-15	E2229		H2229	H2329	H2829			2029									
305/75-15	E2229		H2229					2029		E3231		 H3231					
315/70-15										E3231		H3229					
315/70-15										E3229		H3229					
325/65-15												H3229					
CR78-15	E2209		 H2209							E3229		поzz9					
GR78-15	E2209			H2316				2009									
			H2216		H2816			2016									
HR78-15	E2216		H2216	H2316	H2816			2016						2433			
LR78-15	E2219	E4219	H2219	H2319	H2819	H4219		2019						2435			
NR78-15	E2221	E4221	H2221	H2321	H2821	H4221		2021						2437			
QR78-15										E3235		H3235					
185/70-15.5	E2209		H2209				46"	2009									
0.40	50000		1.10000				16"	Whe									4.0) (75
6-16	E2206		H2206														ASV75
6.5-16	E2216			H2316				2016						2435			ASV77
7-16	E2219	E4219		H2319	H2819	H4219			2119V					2435	4407		ASV79
7.5-16	E2221	E4221	H2221	H2321	H2821	H4221			2119V		E3251		H3251	2437	4437		ASV81
8.25-16	E2228	E4228	H2228	H2328	H2828	H4228		2028									ASV84
8.75-16	E2237	E4237	H2237			H4237		2037									
9-16	E2237	E4237	H2237			H4237		2037									ASV85
11-16										E3229		H3229					
12-16										E3229		H3229					
29x9.5-16	E2216		H2216	H2316	H2816			2016									
30x9.5-16	E2229		H2229		H2829				2119V					2437			
31x10.5-16					H3810			3010		E3210		H3210		2437			
31x16-16										E3259		H3259					
31x11.5-16								3027		E3227		H3227					
32x11.5-16										E3227		H3227					
33x12.5-16								2033		E3231		H3231					
33x13.5-16								2033		E3231		H3231					
34x9-16										E3227		H3227					
35x12.5-16	E2226		H2226					2037		E3231		H3231					

10





2200 4200 2200 2300 2800 4200 4300 2000 2100 3200 3200 3200 3200 400 4 If Wheels 35x13.5-16 E3235 H3235		
Singles 2200Duals 4200Singles 2300Singles 2300Singles 2800Duals 4200Singles 4300Cables 2000Singles 2100Duals 3200Singles 3200Duals 3200Singles <td>uals 4x4 400 "XMF</td> <td>R" "ASV"</td>	uals 4x4 400 "XMF	R" "ASV"
2200 4200 2200 2300 2800 4200 4300 2000 2100 3200 3200 3200 3200 2400 4 If Wheels 35x13.5-16 E3235 H3235	400 "XMF	R" "ASV"
16" Wheels 35x13.5-16 E3235 H3235		_
35x13.5-16 E3235 H3235		
36x13.5-16 2039 E3235 H3235		
36.5x14-16 2039 E3235 H3235		
38x15-16 E3265 H3265		
185-16 E2219 H2219 H2319 H2819 2019		
195/75-16 E2216 H2216 H2316 H2816 2016		
195/85-16	XMR7	77
195-16 E2219 H2219 H2319 H2819 2019		
205/75-16 E2216 H2216 H2316 H2816 2016 2433	XMR7	7 ASV77
205/80-16 E2229 H2229 H2329 H2829 2029 2433		
205-16 E2216 H2216 H2316 H2816 2016 2435	XMR7	79 ASV77
	XMR7	77
		79 ASV79
		30 ASV79
		30 ASV79
	XMR7	79
		79 ASV80
		7 ASV77
	XMR7	
		30 ASV80
		32 ASV80
		32 ASV82
	XMR7	
		30 ASV80
		31 ASV81
	412 VMD9	32 ASV82
245/-16 E3227 H3227 255/65-16 E2229 E4229 H2229 H2329 H2829 H4229 2029 2119V		
		30 ASV80
	XMR8	
	XMR8	
		32 ASV82
	 VMD0	
		32 ASV82
285/70-16 E2228 H2228 H2328 H2828 2028 2114V E3229 H3229		





Light Track Light Track Wide Base Wide Base Mide Base			wag				Glacier				Pev	0	Glad		•	/Glacier	Pev	Ŭ
Single Singles Singles <t< th=""><th></th><th><u> </u></th><th></th><th></th><th>-</th><th></th><th>-</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>ern</th></t<>		<u> </u>			-		-											ern
200 4200 200 200 200 3200 3200 3200 3200 200 4400 XMR* NSV* 28675-16	Tire Size	1 - C - C - C - C - C - C - C - C - C -	1 A A A A A A A A A A A A A A A A A A A				Tw ist					-					BrentaC	
16* Wheels 16* Wheels 17* 17* 17* 285/75-16 17* <		-		-	-	-					-		-		-			
28475-16 E228 H2228 H2828 H2828 2022 J14V E229 H3229 H3229		2200	4200	2200	2300	2800	4200				3200	3200	3200	3200	2400	4400	"XMR"	"ASV"
22665-16								16"										
28675.16		E2228		H2228	H2328	H2828			2028									
30670-16 E226 H2226 H2226 2033 E321 H3231 2441										2114V	E3229							
30665-16	295/75-16																	
31570-16 E226 H2226 H2226 H2226 H2226 H2237 H3231 H3231 2441 H H H 31575-16 E226 H2226 H2219 H2210 H2220 H2220 <th></th> <th>E2226</th> <th></th> <th>H2226</th> <th></th> <th></th> <th></th> <th></th> <th>2033</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>2441</th> <th></th> <th></th> <th></th>		E2226		H2226					2033						2441			
315/75-16 E226 H226 H226 H226 H233 H3235 H3235 H2335 H3235											E3259		H3259					
22585-16		E2226		H2226					2037						2441			
36565-16	315/75-16	E2226		H2226					2037		E3231		H3231		2441			
HR78-16 E221 E4219 H2219 H2219 H2211 H2111 H1111 <t< th=""><th>325/85-16</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>E3235</th><th></th><th>H3235</th><th></th><th></th><th></th><th></th><th></th></t<>	325/85-16										E3235		H3235					
LR78-16 E2221 E4221 H2221 H2221 H2221 H2221 H2216 H216 <t< th=""><th>365/65-16</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>E3235</th><th></th><th>H3235</th><th></th><th></th><th></th><th></th><th></th></t<>	365/65-16										E3235		H3235					
16.5" Wheels 8:16.5 E2216 H2216 H2216<		E2219		H2219	H2319				2019									
B-16.5 E2216	LR78-16	E2221	E4221	H2221	H2321	H2821	H4221								2437			
B5-16.5 E2216								16.5	"Wh	eels								
8.787.16.5 E2219 E4219 H221 H221 H4221	8-16.5	E2216		H2216	H2316	H2816			2016	2115V					2433			
9.5-16.5 E2221 E4221 H2321 H2321 H2321 H4221 2021 2129V E3227 H3227 2437	8.5-16.5	E2216		H2216	H2316	H2816			2016						2433			
10-16.5 <	8.75R-16.5	E2219	E4219	H2219	H2319	H2819	H4219		2019	2115V								
12-16.5	9.5-16.5	E2221	E4221	H2221	H2321	H2821	H4221		2021	2129V	E3227		H3227		2437			
14-16.5	10-16.5								3010		E3210		H3210					
30x9.5-16.5	12-16.5								3029	2127V	E3229		H3229					
31x10.5-16.5	14-16.5										E3235		H3235					
31x11.5-16.5	30x9.5-16.5								3010		E3210		H3210					
32x11.5-16.5	31x10.5-16.5								3027	2119V	E3227		H3227					
32x12.5-16.5	31x11.5-16.5								3027	2129V	E3227		H3227					
33x12.5-16.5	32x11.5-16.5								3027	2127V	E3227		H3227					
35x14-16.5	32x12.5-16.5								3029	2114V	E3229		H3229					
33x15-16.5	33x12.5-16.5								3029	2114V	E3229		H3229					
35x12.5-16.5	35x14-16.5										E3235		H3235					
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	33x15-16.5										E3229		H3229					
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	35x12.5-16.5									2114V	E3235		H3235					
31x10.5-16.5	36x12.5-16.5										E3235		H3235					
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	30x9.5-16.5										E3210		H3210					
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	31x10.5-16.5								3027		E3227		H3227					
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	31x11.5-16.5								3027	2129V	E3227		H3227					
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	31x13.5-16.5										E3229		H3229					
33x10.5-16.5	32x11.5-16.5									2129V	E3227		H3227					
33x12.5-16.5	32x12.5-16.5								3029	2114V	E3229		H3229					
33x14.5-16.5	33x10.5-16.5										E3229		H3229					
35x12.5-16.5 E2226 H2226 2114V E3231 H3231 E3235 H3235 2445 2039 E3235 H3235 2445 36x14.5-16.5 2039 E3235 H3235 37x12.5-16.5	33x12.5-16.5								3029	2144V	E3229		H3229					
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	33x14.5-16.5										E3229		H3229					
36x12.5-16.5 E2226 H2226 E3235 H3235 2445 36x13.5-16.5 E2226 H2226 2039 E3235 H3235 2445 36x14.5-16.5 H2226 E3251 H3255 2445 36x14.5-16.5 E3251 H3251 37x12.5-16.5 E3251 H3255 37x14.5-16.5 E2226 H2226 E3251 H3255 38x15.5-16.5 E2226 H2226 E3251 H3255 38x15.5-16.5 E2226 H2226 E3251 H3235 38.5x15-16.5 E2226 H2226 E3251 H3235 38.5x15-16.5 E2226 H2226 E3251 H3235 38.5x15-16.5 E2226 H2226 E3251 H3235 39.5x15-16.5 E2226 H2226 E3251 H3235	35x12.5-16.5	E2226		H2226						2114V	E3231		H3231					
36x13.5-16.5 E2226 H2226 2039 E3235 H3235 2445	35x14-16.5	E2226		H2226							E3231		H3231					
36x14-16.5 E2226 H2226 2039 E3235 H3235 2445	36x12.5-16.5	E2226		H2226							E3235		H3235		2445			
36x14.5-16.5 E3251 H3251	36x13.5-16.5	E2226		H2226					2039		E3235		H3235		2445			
37x12.5-16.5 E3235 H3235	36x14-16.5	E2226		H2226					2039		E3235		H3235		2445			
37x14.5-16.5 E3251 H3251	36x14.5-16.5										E3251		H3251					
38x15.5-16.5 E2226 H2226 2039 E3235 H3235	37x12.5-16.5										E3235		H3235					
38.5x15-16.5 E2226 H2226 2039 E3235 H3235	37x14.5-16.5										E3251		H3251					
38.5x16-16.5 E3249 H3249	38x15.5-16.5	E2226		H2226					2039		E3235		H3235					
39.5x15-16.5 E3251 H3251 40x17-16.5 E3251 H3251 44x18.5-16.5 E3269 H3269 17" Wheels	38.5x15-16.5	E2226		H2226					2039		E3235		H3235					
40x17-16.5 E3251 H3251	38.5x16-16.5										E3249		H3249					
44x18.5-16.5 E3269 H3269	39.5x15-16.5										E3251		H3251					
17" Wheels	40x17-16.5										E3251		H3251					
	44x18.5-16.5										E3269		H3269					
								17"	Whe	els								
	7-17	E2221	E4221	H2221	H2321	H2821	H4221								2437			

(12)

For more information, call : Tire Chain Division 800-445-2895 or TPC / Industrial Chain Division 800-526-3924






	Pev	<u> </u>		_		Glacier		-		Pew	-	Glad			/Glacier		<u> </u>
T 0		Truck	-	•		ght Truc		<u> </u>	h	Wide		Wide		Mud S		Patt	ern
Tire Size		Square				Tw ist				Square				•	• •	BrentaC	
	Singles		Singles	Singles	-	Duals		-		Singles		Singles		Singles		4x4	
	2200	4200	2200	2300	2800	4200	4300	2000	2100	3200	3200	3200	3200	2400	4400	"XMR"	"ASV"
7 5 47	50044	E4044	1.1004.4	1.100.4.4		14044	17"	Whe									
7.5-17	E2214	E4214		H2314		H4214		2014									
8.25-17	E2237	E4237	H2237	H2337		H4237		2037									
215/70-17	E2228	E4228	H2228	H2328		H4228		2028						2439			
225/75-17	E2219 E2229	E4219	H2219 H2229	H2319	H2819 H2829	H4219		2019 2029						2437			
235/55-17	EZZZ9		nzzzy	H2329	пzоzэ 			2029								XMR79	
235/60-17 235/65-17	E2211		H2211						2119V							XMR80	
235/70-17	E2219		H2219	H2319	H2819				2119V								
235/75-17								3010		E3210		H3210					
235/80-17	E2228	E4228	H2228	H2328	H2819			2028									
235/85-17	E2228	E4228	H2228	H2328	H2819			2028									
245/60-17	E2219	H4219	H2219	H2319	H2819	H4219		2019	2119V								
245/65-17								3010	2129V	E3227		H3227				XMR80	
245/70-17								3010	2121V	E3227		H3227					
245/75-17	E3210		H3210		H3810			3010	2121V							XMR82	
255/50-17																XMR79	
255/55-17	E2229	E4229	H2229	H2329	H2829	H4229		2029									
255/60-17	E2229	E4229	H2229	H2329	H2829	H4229		3010		E3210		H3210				XMR80	
255/65-17								3010	2121V	E3210		H3210		2437			
255/70-17	E2228	E4228	H2228	H2328	H2828	H4228		3027		E3227		H3227		2439			
255/75-17	E2228	E4228	H2228	H2328	H2828	H4228		3027	2121V	E3227		H3227		2439		XMR82	
265/55-17	E2228	E4228	H2228	H2328	H2828	H4228		3010	2127V	E3210		H3210					
265/60-17	E3210		H3210		H3810			3027	2121V	E3227		H3227		2439			
265/65-17	E3210							3027		E3227		H3227		2439			
265/70-17	E2228	E4228	H2228	H2328	H2828	H4228		3027	2121V	-		H3227		2439		XMR82	
265/75-17	E2228	E4228	H2228	H2328	H2828	H4228		3029	2121V			H3229		2441			
265/85-17	H2226		H2226							E3231		H3231		2441			
275/50-17	E2229	E4229	H2229	H2328	H2829	H4229		2029									
275/55-17	E2229	E4229 E4228	H2229	H2328	H2829	H4229			2121V			H3210					
275/60-17	E2228 E2228	E4228	H2228	H2328	H2828	H4228		3027 3027		E3227		H3227		2439		XMR81	
275/65-17 275/70-17	E2228	E4220	H2228 H2228	H2328 H2328	H2828 H2828	H4228 H4228		2028		E3227 E3229		H3227 H3229		2439 2439			
275/80-17	E2228	E4228	H2228	H2328	H2828	H4228		2028		L3229		1.5229					
285/60-17	E2228	E4228		H2328					2129V	F3231		H3231					
285/70-17								3029		E3229		H3229					
285/75-17								3029		E3229		H3229					
295/70-17										E3229		H3229					
305/65-17								2033		E3231		H3231					
305/70-17	E2226	E4226	H2226	H2326	H2826	H4226		2037		E3231		H3231					
315/70-17	E2226		H2226					2037		E3231		H3231					
31x10.5-17	E3210		H3210		H3810			2029		E3227		H3227		2437			
33x12.5-17								2033		E3229		H3229					
35x12.5-17								2037		E3235		H3235					
36x13.5-17										E3225		H3235					
							17.5"	Whe	els								
7-17.5	E2211		H2211														ASV79
7.5-17.5																	ASV84
8-17.5	E2219	E4219	H2219	H2319	H2819				2119V			H3249				XMR80	
8.5-17.5	E2219	E4219		H2319	H2819				2121V					2441		XMR81	
9-17.5	E3210		H3210	LIDDOO	H3810			3027		E3227		H3227		2437			
10-17.5	E2228	E4228	H2228		H2828	H4228		2028		E3227		H3227		2439			ASV84
11-17.5	E2239	E4239		H2339	H2839	H4239		2039		 E2225							
14-17.5 205/60-17.5	 F2209		 H2209					2009		E3235		H3235		 2433			
203/00-17.3	E2209		112209					2009						2433			





	Pev	vaq				Glacier				Pev	/aq	Glac	ier	Pewag	/Glacier	Pev	vaq
		Truck				aht Truc	k			Wide		Wide I		Mud S		Patt	U U
Tire Size	Square	Square	Tw ist	Square	V-bar	Tw ist	Square	Cables	V-Trac	Square	Square	Tw ist	Tw ist		1	BrentaC	
	Singles	Duals	Singles	Singles	Singles	Duals				Singles				Singles		4x4	
	2200	4200	2200	2300	2800	4200	4300	•	2100	3200	3200	-	3200	2400	4400	"XMR"	"ASV"
							17.5"	Whe									
205/65-17.5	E2216		H2216						2121V							XMR76	ASV76
205/70-17.5																XMR79	
205/75-17.5	E2219		H2219	H2319	H2819			2019	2129V					2433		XMR79	
215/70-17.5								2019	2115V								
215/75-17.5	E2219	E4219	H2219	H2319	H2819	H4219			2119V					2437			
225/55-17.5																XMR77	
225/70-17.5	E2221	E4221	H2221	H2321	H2821	H4221		2021						2437			
225/75-17.5	E2221	E4221	H2221	H2321	H2821	H4221		2021						2437		XMR81	
235/75-17.5									2114V	E3210		H3210		2437		XMR82	
245/70-17.5	E2228	E4228	H2228	H2328	H2828	H4228		2028		E3229		H3229		2439		XMR82	
245/75-17.5	E2228	E4228	H2228	H2328	H2828	H4228		2028		E3229		H3229		2439		71111102	
255/40-17.5		L4220	112220					2020		L3229				2439		XMR77	
255/40-17.5																XIVIR//	
255/65-17.5								2029									
265/60-17.5	E2229		H2229	H2329	H2829			2029								XMR82	
285/60-17.5	E2228	E4228	H4228		H2828	H4228	18"	2028 Whe									
0.00.10																14.0000	
6.00-18																XMR79	
7-18	E2214	E4214	H2214	H2314	H2814	H4214		2014									
7.5-18	E2233	E4233	H2233		H2833			2033									
9-18	E2237	E4237	H2237	H2337	H2837	H4237		2037									
10-18	E2237	E4237	H2237	H2337	H2837	H4237		2037									
215/75-18	E2219	E4219	H2219	H2319	H2819	H4219		2019									
235/60-18	E2229	E4229	H2229	H2329	H2829	H4229		2029	2117V							XMR80	
235/80-18	E2228	E4228	H2228	H2328	H2828	H4228		2028	2121V								
245/55-18	E2229	E4229	H2229	H2329	H2829	H4229		2029									
245/60-18	E3210		H3210					2029									
255/55-18	E2229	E4229	H2229	H2329	H2829	H4229		2029	2121V					2437	>	(MR80A)	/
255/60-18	E3210		H3210					3010		E3227		H3227					
255/65-18	E2229	E4229	H2229	H2329	H2829	H4229		2029						2437			
255/70-18	E2228	E4228	H2228	H2328	H2828	H4228		2028		E3227		H3227		2439			
265/60-18								3027		E3227		H3227		2439			
265/70-18	E2228	E4228	H2228	H2328	H2828	H4228		2028	2127V								
270/75-18								2039		E3229		H3229					
275/55-18									2127V	E3227		H3227					
275/60-18	E2228	E4228	H2228	H2328	H2828	H4228		2028									
275/65-18	E2228	E4228		H2328					2127V	E3229		H3229					
275/70-18								3029		E3229		H3229					
275/75-18	E2226	E4226	H2226	H2326	H2826	H4226		2033		E3231		H3231					
285/50-18	E2228			H2328				2028		E3231		H3231					
285/55-18	E2228	E4228		H2328													
285/60-18	E2228	E4228		H2328					2127V			H3229		2439			
285/65-18								3029		E3229		H3229					
285/70-18	E2226	E4226	H2226		H2826					E3231		H3231					
285/75-18										E3231		H3231					
295/45-18									2121V			H3227					
305/60-18										E3231		H3231					
305/65-18										E3231		H3231					
305/70-18										E3231		H3235					
315/60-18										E3231		H3231		2441 2441			
325/50-18										E3231		H3231					
325/60-18										E3231		H3231		2441			
35x12.5x18										E3231		H3231		2441			
37x12.5x18										E3235		H3235					
37x13.5x18										E3251		H3251					







	Pev	vaq				Glacier				Pev	vaq	Glad	cier	Pewag/	Glacier	Pev	waq
	Light	5				ght Truc	k				Base	Wide		Mud Se		Patt	~
Tire Size	Square	Square	Tw ist	Square	V-bar	Tw ist	Square	Cables	V-Trac	Square	Square	Tw ist	Tw ist	Square	Square	BrentaC	
	Singles	Duals	Singles	Singles	Singles	Duals	Duals	Singles	Cables	Singles	Duals	Singles	Duals	Singles	Duals	4x4	
	2200	4200	2200	2300	2800	4200	4300	2000	2100	3200	3200	3200	3200	2400	4400	"XMR"	"ASV"
							18.5	"Wh	eels								
255/65-18.5	E2228	E4228	H2228	H2328	H2828			2028									
							19"	Whe	els								
235/50-19	E2216	E4216	H2216		H2816	H4216		2016									
235/55-19	E2219	E4219	H2219	H2319	H2819	H4219										XMR80	
255/50-19	E2229	E4229	H2229	H2329	H2829	H4229		2029	2129V							XMR80A	/
265/50-19	E2229	E4229	H2229	H2329	H2829	H4229		2029	2129V)	KMR80A	V
275/45-19	E2229	E4229	H2229	H2329	H2829	H4229		2029									
275/55-19	E2228	E4228	H2228	H2328	H2828	H4228		2028									
285/45-19								2029	2119V	E3210		H3210					
							20"	Whe	els								
265/60-20	E2228	E4228	H2228	H2328	H2828	H4228		2028									
275/45-20	E3210		H3210					3010		E3227		H3227					
275/50-20	E2228	E4228	H2228	H2328	H2828	H4228											
275/55-20								2028		E3229		H3229					ASV84
275/60-20	E2226		H2226					2037	2114V	E3231		H3231					
275/65-20								2033		E3231		H3231					
285/50-20	E2228	E4228	H2228	H2328	H2828	H4228		2028		E3229		H3229					
295/40-20	E2227		H2228	H2328	H2828			2028									
295/45-20	E2228		H2228	H2328	H2828			2028									
305/45-20								2033		E3229		H3229					
305/50-20								3029		E3229		H3229					
325/50-20										E3231		H3231					
325/60-20										E3235		H3235					
33x12.5x20										E3231		H3231					
35x12.5x20	E2226		H2226							E3229		H3229					
37x13.5x20										E3251		H3251					
40x15.5x20										E3255		H3255					
							22"	Whe									
275/45-22										E3229		H3229					
285/40-22	E2228		H2228	H2328	H2828			2028		H3227		H3227		2439			
285/45-22	E2226		H2226					2033		E3231		H3231					
305/40-22	E2238		H2238					2033		E3231		H3231					
305/45-22	E2226		H2226					2037		E3231		H3231					
325/40-22	E2226		H2226							E3231		H3231					
							24"	Whe	els								
295/35-24								2033		E3231		H3231					
295/40-24	E2226		H2226					2037		E3231		H3231					
305/35-24	E2226		H2226					2037		E3231		H3231					
315/35-24	E2226		H2226					2037		E3231		H3231					

Tires: The use of any traction device may cause cosmetic scuffing of tires when installed. This condition is unavoidable with certain tread types and designs being more at risk. By design, all traction devices must hang down (drape) the side wall of the tire in order to stay on the tire while being used. As a result, radial tires may also experience some scuffing of the tires side wall due to the flex inherent in the side walls of radial tires.

Wheels: Wheels are also at risk to cosmetic scuffing with the use of any traction device. Larger diameter wheels using very low profile tires such as 35, 40, 45, and 50 series tires are especially at risk due to the short height of the tire side wall.

Vehicles: Traction devices can and do break during the course of their normal service life. Traction devices are designed for use in the snow or ice covered road surfaces - Not on bare pavement. Use of traction devices on bare pavement greatly increases the wear and chance of component failure of the device. Speeds faster than 30 MPH also greatly increase the chance of component failure. Continued use of traction device which has been broken is extremely unsafe and may cause loss of control or damage to the vehicle on which installed. Any traction device which has been broken should immediately be repaired or replaced in a safe place.

Disclaimer of Liability: The use of any traction device is at the risk of the vehicle operator. Vehicle operators who are unwilling to accept the possible risks associated with the use of any traction device such as, but not limited to, accident, vehicle damage, tire damage or wheel damage, should not use any traction device on their vehicle. Continued travel on roads where the use of a traction device is suggested or required should be terminated if the vehicle operator elects not to use a traction device on their vehicle. Under no circumstances will compensation for damage be considered by Pewaq, Inc. where the damage is said to have resulted from the use of any traction device.







Tine 01-1	Pev	0			Gla				Gla		Glacier	Pewa	0	Pev	0	Pewa	0	Pev	3
Tire Size	· · · · · ·	Truck	-	_	Heavy		-		Heavy		Truck	Glacie			Truck	Glaci			Truck
	Squar			Square			Square		Cable		V-Trac	Wide			Pattern	Mud S			Pattern
	Singles		•	Singles	~	Duals	Duals		Singles		Singles	-		Singles	Duals	Singles		Singles	
	2000	4200	2200	2300	2800	4200	4300	4800	2000		2100	3200	3200	CL	CL	2400	4400	"ASV"	"ASV"
9 10 5	F2244	E4014	11004.4	10244	11004.4	14244		19.5			21141/					2420		00	202
8-19.5 15-19.5	E2214	E4214	nzz14	nz314	H2814	H4214		H4814	2014		2114V	3265				2439		82	282
16.5-19.5											2155V	3255							
18-19.5											21557	3255							
19.5-19.5									3061		3171V	3261							
225/70-19.5	F2221	E4221	H2221	H2321	H2821	H4221		H4821	2021		2121V	3227				2439	4437		
225/75-19.5	E2228		H2228	-	H2828				2028										
245/70-19.5			H2233		H2833			H4833	2028		2114V					2439	4437	84	284
245/75-19.5		E4228	H2233		H2833			H4833	2028										
265/70-19.5	E2237	E4237	H2237	H2337	H2837	H4237		H4837	2033			3229						85	285
265/75-19.5	E2237	E4237	H2237	H2337	H2837	H4237		H4837											
285/70-19.5	E2238	E4238	H2237	H2337	H2837	H4237		H4837	2037			3231						87	288
285/75-19.5	E2239	E4239	H2239	H2339	H2839	H4239	H4339	H4839	2039	4039						2445			
305/70-19.5	E2239	E4239	H2239	H2339	H2839	H4239	H4339	H4839	2039	4039		3235				2441		93	
445/65-19.5									2039	4039		3257				2445			
								20"	Whe										
6.5-20		E4233			H2833	4233			2033							2437		82	
7-20	_	E4233			H2833	4233			2033										
7.5-20	E2237				H2837			H4837	2037				3267			2441	4435	85	287
8-20 8.25-20	E2239 E2239	E4239			H2839 H2839		H4339 H4339	H4839 H4839	2037 2037				3269			2437 2441	4435	 88	 288
9-20	E2239	E4239			H2841		H4341	H4841	2037	4039			3209	CI 915	CL291S		4435	91	200
10/90-20					H2845			-	2000	4033			5275	01910		2448	4448		231
10-20		E4245			H2845			H4845	2045	4045	2145V		3275	CI 94S	CL294S		4448	94	294
10.5-20	E2241	E4241			H2841			H4841	2041	4041									
11-20	E2251	E4251	H2251	H2351	H2851	H4251		H4851H	2049	4049	2149V		3277	CL97S	CL297S	2452	4461	97	297
11.5-20	E2251	E4251	H2251	H2351	H2851	H4251		H4851H	2049	4049						2452			
12-20	E2255	E4255	H2255	H2355	H2855	H4255					2155V					2486	4486	01	201
12/80-20																		94	
12.5-20																		95	
13/80-20	E2255	E4255	H2249	H2349		H4249	H4349	H4849	2049	4049						2486	4486		
13-20	E2257	E4257	H2257		H2857														
14/80-20	E2257	E4257	H2257		H2857													01	201
14-20	E2271		H2271 H2255	 H2355	 H2855													08 08	
14.5-20 14.75/80-20	E2255 E2257		H2255		H2857	H4255												05	
15.5/80-20	E2271		H2271																
16-20												3277						10	
33-12.5-20												3231							
35-13.5-20												3235							
37-13.5-20												3251							
40-15.5-20												3255							
225/70-20	E2233		H2233		H2833				3010							2437			
245/60-20		E4228		H2328	H2828														
245/70-20	E2233		H2233		H2833				2028										
275/55-20									3029			3231							
275/60-20										2114V		3231							
285/50-20 305/50-20												3231 3231							
305/50-20	E2255	E4255	H2255	 H2355		H4255			2049	4049		3251				2452		95	
355/80-20	EZZ00	E4200	HZ200	HZ300	H2000				2049	4049		3255				2452		90	
365/80-20		E4257			H2857				3061		2155V	3261				2486		02	
365/85-20	E2271	E4271	H2271															94	
370/75-20																		01	
395/85-20	E2271		H2271								3161V	3271				2486			
405/70-20												3255							

For more information, call : Tire Chain Division 800-445-2895 or TPC / Industrial Chain Division 800-526-3924





Tire Chain Fit Chart

	Pev	van			Gla	rior			Gla	cior	Glacier	Pewa	na "F"	Pev	van	Pewa	ad "E"	Dov	wag
Tire Size		vay Truck			Heavy					Truck		Glaci			Truck		iy ⊑ er "H"		vay Truck
	Squar		Twist	Square	V-Bar		Square	V-Bar	Cable		V-Trac		Base	· ·	Pattern		Service		Pattern
	Singles		•	Singles		Duals	Duals	Duals						Singles		Singles		Singles	
	2000	4200	2200	2300	2800	4200	4300	4800	2000		2100	3200	3200	CL	CL	2400	4400	"ASV"	"ASV"
								21"	Whe	els							,		
14-21	E2271	E4271	H2271																
24-21									3061			3261							
								22"	Whe	els									
325/50-22												3235							
10-22	E2249	-				-	H4349	H4849	2049	4049	2149V		3277			2452	4461		
11-22	E2255	E4255	H2255	H2355	H2855	H4255					2155V		3277			2486	4486		
12-22								22.5		eels								03	203
7-22.5	E2233	E4233	L0000		H2833	L/222		22.5	2033	eeis			3259			2439			
8-22.5			H2233					H4837	2033				3267			2439		85	287
9-22.5	-	-	H2239					H4839	2037				3269			2441	4435	88	201
10-22.5	E2241	E4241		H2341			H4341	H4841	2041	4041			3273		CL291S		4437	91	291
11-22.5	E2247		H2247					H4847	2045	-	2145V		3275		CL294S		4448	94	294
12-22.5	E2251		H2251					H4851	2049		2149V		3277		CL297S		4461	97	297
12.5-22.5	E2255	E4255	H2255	H2355	H2855	H4255			2049	4049	2149V		3277			2452			
12.75-22.5	E2255	E4255	H2255	H2355	H2855	H4255			2049	4049									
13-22.5	E2255	E4255	H2255	H2355	H2855	H4255			2049	4049								01	201
15-22.5									3061		2155V	3255							
16.5-22.5											3161V								
18-22.5											3171V	3261							
19-22.5									3061			3261							
225/70-22.5	E2237	E4237	-	H2337		H4237		H4837	2037							2441	4435		
235/75-22.5			H2237 H2239					H4837 H4839	2033 2039	4039			3269			2441 2441	4435 4435		
235/80-22.5				H2339			H4339	H4839	2039	4039			3269			2441	4435		
245/75-22.5		E4239		H2339			H4339	H4839	2039	4039			3269			2441	4435		
245/80-22.5		E4239		H2339				H4839	2039	4039						2441	4435		
255/70-22.5									2039	4039						2441	4435	88	288
255/75-22.5	E2239	E4239	H2239	H2339	H2839	H4239	H4339	H4839	2039	4039						2445	4437		
255/80-22.5	E2241	E4241	H2241	H2341	H2841	H4241	H4341	H4841	2039	4039			3269			2445	4437		
265/65-22.5	E2237	E4237	H2237	H2337	H2837	H4237		H4837	2037										
265/75-22.5	E2241	E4241	H2241	H2341	H2841	H4241	H4341	H4841	2039	4039	2145V					2445	4437		
275/70-22.5		E4241	H2241	H2341	H2841	H4241	H4341	H4841	2039	4039	2145V			CL91S	CL291S	2445	4437	90	289
	E2245	E4245	H2245	H2345	H2845	H4245	H4345	H4845	2045	4045	2145V			CL94S	CL294S	2445	4437	94	294
275/85-22.5											2145V								
285/60-22.5																		91	
285/70-22.5 285/75-22.5	 E22/17	E4247	H2247	 H23/17	 H28/17	 H4247		 H4847	2045 2045	4045	21/5\/			CL91S	CL291S	2448	1118	91	
285/75-22.5	E2247	E4247	HZZ47	H2347	H2847		H4347	1 14047	2045	4045	2145V					2448	4448	91	
295/70-22.5									2045	4045					CL291S			91	291
295/75-22.5					H2847		H4347	H4847	2045		2145V		3275		CL294S		4448	94	294
295/80-22.5		E4251		H2351					2049		2149V		3273		CL294S		4448	94	294
305/60-22.5																		91	
305/70-22.5	E2247	E4247	H2247	H2347	H2847	H4247	H4347	H4847	2045	4045			3277	CL94S	CL294S	2448	4448	94	
305/80-22.5	E2251	E4251	H2251	H2351	H2851	H4251		H4851	2049	4049									
305/85-22.5	E2255	E4255	H2255	H2355	H2855	H4255		H4855											
315/60-22.5																		91	
315/70-22.5																		94	294
315/75-22.5		E4251						H4851	2049	4049					CL297S		4461	97	297
315/80-22.5									2049		2149V		3277		CL297S		4486	97	297
365/70-22.5												3255							
365/80-22.5 375/90-22.5											2155V	3255							
375/90-22.5											2155V	3255						08 01	
425/55-22.5											3161V								
120,00-22.0											51017	0211							





Tire Chain Fit Chart

	Pev	5			Gla				Gla		Glacier	Pewa		Pev		Pewa			vag
Tire Size	Heavy				Heavy				Heavy			Glaci			Truck	Glaci		· · · · ·	Truck
	Squar	e Link	Tw ist	Square	V-Bar	Tw ist	Square	V-Bar	Cable	Chains	V-Trac	Wide	Base	"CL" F	Pattern	Mud S	ervice	ASV F	Pattern
	Singles	Duals	Singles	Singles	Singles	Duals	Duals	Duals	Singles	Duals	Singles	Singles	Duals	Singles	Duals	Singles	Duals	Singles	Duals
	2000	4200	2200	2300	2800	4200	4300	4800	2000	4000	2100	3200	3200	CL	CL	2400	4400	"ASV"	"ASV'
								22.5	" Whe	eels									
425/65-22.5									3069		3161V	3271						155 8	
445/50-22.5											3171V	3269							
445/55-22.5												3271							
445/65-22.5									3061		3171V	3261						160-8	
445/80-22.5												3271							
455/50/22.5												3271							
455/55-22.5									3071		3171V	3271							
								24"	Whe	els									
11-24	E2253	E4253	H2253		H2853	H4253					2149V					2486	4486	03	
12-24	E2257	E4257	H2257		H2857	H4257					2149V							06	
13-24	E2271	E4271	H2271															08	
14-24	E2273	E4273	H2273															10	
315/75-24	E2255	E4255	H2255	H2355	H2855	H4255													
385/95-24	E2273	E4273	H2273																
								24.5	" Whe	eels									
11-24.5	E2249	E4249	H2249	H2349	H2849	H4249	H4349	H4849	2049	4049	2149V		3277	CL97S	CL297S	2452	4461		
12-24.5	E2255	E4255	H2255	H2355	H2855	H4255					2149V					2486	4486		
12.5-24.5	E2255	E4255	H2255	H2355	H2855	H4255													
275/80-24.5	E2247	E4247	H2247	H2347	H2847	H4247	H4347	H4847	2045	4045	2145V					2448	4448		
285/70-24.5	E2247	E4247	H2247	H2347	H2847	H4247	H4347	H4847	2045	4045						2448	4448		
285/75-24.5	E2249	E4249	H2249	H2349	H2849	H4249	H4349	H4849	2049	4049	2145V		3275			2452	4461		
285/80-24.5	E2249	E4249	H2249	H2349	H2849	H4249	H4349	H4849	2049	4049	2149V			CL97S	CL297S	2452	4461		
295/75-24.5	E2253	E4253	H2253		H2853	H4253			2049	4049						2452	4461		
305/75-24.5	E2255	E4255	H2255	H2355	H2855	H4255			2049	4049	2149V		3277			2452	4461		
315/75-24.5	E2255	E4255	H2255	H2355	H2855	H4255					2155V		3277						

Pewag will custom build chains to suit your needs for any tire size and application. All of our made to order chains are built to the highest quality Pewag standards. Call our office today and order your custom Pewag chains.



For more information, call : Tire Chain Division 800-445-2895 or TPC / Industrial Chain Division 800-526-3924





Tire Chain Facts






S.A.E. Minimum Clearance Specifications For Tire Chains:

Note: For design purposes, "D" is the maximum known tire section width as established by the Tire & Rim Association (TRA). The minimum clearances specified must be maintained around spring clips, fenders, braces, splash pans, fuel lines, brake lines, brake controls and wherever necessary. Tire size must be known in order to select a tire chain of correct fit. For passenger cars, vans and small pick-up trucks, it is important to check the owners manual. The restricted wheel clearances in most of today's downsized and front wheel drive (FWD) vehicles may require the use of S.A.E. Class "S" tire chains or prohibit their use, as noted in the owners manual.

Please Note:

- 1.) All tires containing an "R" designate "Radial" tires. All traction devices for sizes with a letter designation (such as P175/70R-14) will fit regular tires (i.e. 175/70-14).
- 2.) Most tire size designations shown do not indicate radial construction. This is done by replacing the dash with a capital "R" in the tire size listing.
- -Example: 10.00-20 becomes 10.00R20. Chains listed can be used on radial and regular tires. 3.) Snow tires, Mud & Snow (M&S) tires and other oversized tires may require a larger size chain.
 - -SAE Class "S": Regular passenger traction devices for vehicles with restricted wheel well clearances.
 - -SAE Class "U": Regular and "All-Square" tire chains for vehicles with regular wheel well clearances.
 - -SAE Class "W": Passenger traction devices that use light truck components, and some light truck PL Chain.

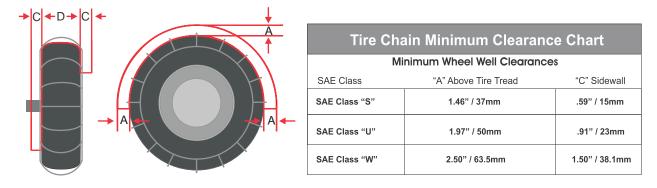

(19)





Pewag Sportmatik SMX Car Chains

High performance - European made - **TITANGrip**[®] tire chains For cars that require class "S" limited clearance tire chains



•3.2mm TITANGrip® titanium alloy steel for exceptional wear •Suitable for front and rear wheel drive cars

- •Can be mounted without moving car
- •Asymmetrical pattern Square Link design for superior traction and a smooth ride
- •Exclusive Pewag self tightening connector system for perfect tensioning
- •Always pre-fit chains before use is required





Pewag Brenta-C XMR 4x4 Chains

For Light Trucks, Pick-ups, and SUV's

- •4.5mm TITANGrip® titanium alloy steel for exceptional wear
- •Can be mounted without moving the vehicle
- •Diagonal pattern Square Link designed for superior forward, stopping, lateral traction and a smooth ride
- •Suitable for emergency vehicle applications
- •*Always* pre-fit chains before use is required





(20)





Pewag Light Truck Square Link Chains

For Light Trucks, Pick-ups, Vans and SUV's



•Our 5.6mm nickel manganese alloy square link tire chains wear over four times longer than conventional 4/0 twist link tire chains •Square Link cross chain gives 32% more traction

•Supplied with CAM (SC) or Non-Cam (S) side chain tighteners

•Always pre-fit chains before use is required



Available in duals



Optional multi-arm adjuster

Pewag Light Truck Mud Service Chains

Extra Heavy Duty for Singles and Duals



- •Pewag "All-Square" 7mm alloy cross chain
- •Ideally suited for heavy snow and mud applications
- •Oversized cross chain for maximum off-road traction
- •Square Link cross chain gives 32% more traction
- •Supplied with CAM (SC) or Non-Cam (S) side chain tighteners
- •Always pre-fit chains before use is required



Available in duals



Optional multi-arm adjuster

(21)





Pewag "ASV" Truck Chains

High performance - European made - **TITANGrip**[®] tire chains Available in Light and Heavy Truck Tire Sizes



Built Pewag tough! With TITANGrip® technology.

- •Designed for use in the severest conditions, where maximum traction is a must
- •Exceptional forward, stopping, and lateral traction capabilities
- •Especially suited for emergency vehicle and off-road use
- •Light truck cross chain size: 7mm
- •Heavy truck cross chain size: 8.2 mm
- Asymmetrical pattern for smoothest ride
- •Always pre-fit chains before use is required



Pewag CL-Pattern Truck Chains

"AII-S

"All-Square" Singles and Dual Continuous Link Pattern Truck Chains

Built Pewag tough with TITANGrip® technology.

•7mm TITANGrip® titanium alloy steel construction for exceptional wear •Can be mounted without moving the vehicle

- •Diagonal pattern Square Link designed for superior forward, stopping, and lateral traction
- •Suitable emergency vehicle applications
- •Always pre-fit chains before use is required



Available in duals









	_					
	Tire Size	Singles Stock No.	Weight Per Pair	Duals Stock No.	Weight Per Pair	C/Chain Stock No.
	11-22.5	TNL 2245SC	45 lbs	TNL4245SC	81.4 lbs	TNL6251
	295/75-22.5	TNL 2245SC	45 lbs	TNL4245SC	81.4 lbs	TNL6251
Ł.	285/75-24.5	TNL 2245SC	45 lbs	TNL4245SC	81.4 lbs	TNL6251
di la	10.00x20	TNL 2245SC	45 lbs	TNL4245SC	81.4 lbs	TNL6251
5	10.00/90-20	TNL 2245SC	45 lbs	TNL4245SC	81.4 lbs	TNL6251
6	275/80-24.5	TNL 2245SC	45 lbs	TNL4245SC	81.4 lbs	TNL6251
5	10.00x22	TNL 2249SC	50 lbs	TNL4249SC	90.2 lbs	TNL6253
£7	11x24.5	TNL 2249SC	50 lbs	TNL4249SC	90.2 lbs	TNL6253
Бí –	285/80-24.5	TNL 2249SC	50 lbs	TNL4249SC	90.2 lbs	TNL6253
5	11.00x20	TNL 2249SC	50 lbs	TNL4249SC	90.2 lbs	TNL6253
9	12x22.5	TNL 2249SC	50 lbs	TNL4249SC	90.2 lbs	TNL6253
/	315/80-22.5	TNL 2249SC	50 lbs	TNL4249SC	90.2 lbs	TNL6253

•Manufactured using our premium 5.6mm alloy steel

- •Lightweight and extremely durable when weight or clearance is a problem
- •"H" Pattern design for a smooth ride and exceptional traction

Pewag Truck Square Link Chains

Singles and Duals for use on Heavy Trucks



- •Our 7mm nickel manganese alloy square link tire chains wear over four times longer than conventional 6/0 twist link tire chains
- •Square Link cross chain gives 32% more traction
- •Both Cam and Non-Cam side chain available by request
- •Always pre-fit chains before use is required





Available in duals C

n duals Optional multi-arm adjuster

Pewag Wide Base Tire Chains

For Light and Heavy Trucks

- •Single tire mount: for high floatation, wide base rim tires and super singles
- •Dual tire mount: for dual tire and wheels with minimal space between tires
- •Both Cam and Non-Cam side chain available by request
- •Always pre-fit chains before use is required





Available in duals Optional multi-arm adjuster

(23)





Pewag Mud Service Chains

Extra Heavy Duty for Singles and Duals



Pewag Mud Service Chains available for Heavy Trucks

- •Pewag "All-Square" alloy cross chain
- •Oversized cross chain for maximum off-road traction
- •For use in heavy snow and mud applications
- •Always pre-fit chains before use is required





Available in duals Optional multi-arm adjuster

Pewag Skid Steer Chains

Designed for Skid Steers with Industrial Lugs





Pe	wag Skid Ste	er Chains
Tire Size	Stock No.	Description
10x16.5	SSE10165-4	4 Link Spacing
12x16.5	SSE12165-4	4 Link Spacing
14x17.5	SSE14175-4	4 Link Spacing
10x16.5	SSE10165-2	2 Link Spacing
12x16.5	SSE12165-2	2 Link Spacing
14x17.5	SSE14175-2	2 Link Spacing

•Pewag skid steer tire chains are extra tough for off road and snow removal use

- •Built using our 8.2mm nickel manganese alloy cross chain for exceptional wear and durability
- •2 and 4 link spacing design available
- •Always pre-fit chains before use is required

(24)





Pewag O.T.R. Chains

Designed for Plows, Scrapers, Loaders, Graders, and Backhoes

Pewag "All-Square" alloy equipment chains - proven value with 32% better traction and four times the wear compared to conventional twist link tire chains used in similar conditions. (Ask about special order with swivel hooks)



Pewag Double Spaced OTR





•For more information see: PAGE 31

	Pewa	ag O	TR Cha	ain							
Tire Size	Stock	8.2	Weight	10	Weight	12	Weight	Cross	8.2	10	12
	Number	mm	Per Pair	mm	Per Pair	mm	Per Pair	Chain	mm	mm	mm
13.00-24; 14.00-20/21;15.5-25; 445/95-25	E2612S	•	97 lbs	•	128 lbs	•	172 lbs	E6630	•	•	•
14.00-24; 14.00-25; 385/95-24; 385/95-25	E2615S	•	114 lbs	•	148 lbs	•	184 lbs	E6630	•	•	•
16.00-20/21;17.5-25; 445/80-25	E2624S			•	150 lbs	•	193 lbs	E6640		•	•
16.00-24;16.00-25; 19.5L-24; 445/95-25	E2627S			•	170 lbs	•	220 lbs	E6640		•	•
20.5-25; 525/80-25	E2633S			•	182 lbs	•	261 lbs	E6650		•	•
18.00-25; 18.00-26; 505/95-25; 550/65-25	E2636S			•	188 lbs	•	243 lbs	E6650		•	•
18.00-33; 600/65-25	E2642S			•	232 lbs	•	296 lbs	E6650		•	•
23.5-25; 25.5-25; 605/80-25	E2645S			•	212 lbs	•	268 lbs	E6660		•	•
21.00-24; 21.00-25	E2648S			•	242 lbs	•	298 lbs	E6660		•	•
21.00-35	E2654S			•	292 lbs	•	351 lbs	E6660		•	•
26.5-25; 686/80-25	E2657S			•	271 lbs	•	346 lbs	E6670		•	•
24.00-25; 26.5-29	E2660S			•	304 lbs	•	356 lbs	E6670		•	•
29.5-25	E2672S			•	312 lbs	•	403 lbs	E6680		•	•
29.5-29	E2675S			•	330 lbs	•	427 lbs	E6680		•	•








Pewag UNIVERSAL "ED" Heavy Equipment Chains

Pewag Universal "ED" with Wear Bars made with - TITANGrip[®] - alloy steel



- •Heavy equipment tire chains are designed for rugged commercial applications
- •Manufactured using Pewag's superior TITANGrip® alloy steel with welded wear bars for extra traction and durability
- •New pattern design offers superb lateral and forward traction •Suitable for on and off road use
- •Highly recommended for snow removal or any heavy duty application where continuous use of tire chains is required
- •Replacement parts available at your local retailer

Universal "ED" chains are available in sizes up to 51" wheels. Sizes not shown can be special ordered. Please call for more information on these special order sizes.
















Pewag Universal "Extension Feld" Chains

Pewag Universal "Extension Felds" with Wear Bars Made in 8.2mm, 10mm, and 12mm

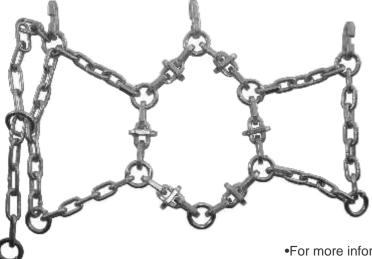

•For more information see: PAGE 31 •For Erzberg & Universal spare parts see: PAGE 46-47

Pewag Universal chains are designed to fit up to L3 tires (that have NOT been capped). For capped L4 and L5 tires, Pewag makes "Extension Felds" which can be easily added to the chains to increase the length of the chain for these types of tires.

The use of "Extension Felds" insures the best possible fit on larger OTR tires and should be anticipated when ordering any tire chains for use on an OTR tire.

Pewag	Universal "ED)" Heav	y Equipment	Chains		
Tire Size	Stock Number	Weight	Stock Number	Weight	Stock Number	Weight
	8.2mm	Per Pair	10mm	Per Pair	12mm	Per Pair
12.00-20	UNE120020-8	174 lbs				
12.5-20	UNE12520-8	154 lbs				
13.00-20	UNE130020-8	190 lbs				
14.00-20	UNE140020-8	209 lbs				
14.5-20	UNE14520-8	170 lbs				
365/85-20	UNE3658520-8	190 lbs				
395/85-20			UNE3958520-10	342 lbs		
445/65-22.5	UNE44565225-8	187 lbs				
13.00-24	UNE130024-8	186 lbs				
14.00-24/25; 385/95-24; 385/95-25	UNE140024-8	235 lbs	UNE140024-10 *	418 lbs		
16.00-24; 445/95-22.5; 19.5L-24		451 lbs	UNE160024-10	451 lbs	UNE160024-12	550 lbs
13.00-25	UNE130025-8	188 lbs				
15.5-25			UNE15525-10	360 lbs		
16.00-25; 445/95-25			UNE160025-10	454 lbs	UNE160025-12	592 lbs
16.00-20; 17.5-25; 445/80-25			UNE17525-10	396 lbs	UNE17525-12	503 lbs
18.00-25; 505/95-25			UNE180025-10	511 lbs		
20.5-25; 525/80-25			UNE20525-10	453 lbs	UNE20525-12	604 lbs
23.5-25; 23.1-26; 605/80-25			UNE23525-10 *	525 lbs	UNE23525-12	640 lbs
26.5-25; 685/80-25			UNE26525-10	571 lbs	UNE26525-12	744 lbs
29.5-25					UNE29525-12	889 lbs
625/70-25; 650/65-25					UNE6257025-12	686 lbs


* Extension Felds included with chains

(27)





Pewag ERZBERG "ED" Heavy Equipment Chains Pewag *Erzberg* "ED" with Wear Bars made with - TITANGrip® - alloy steel

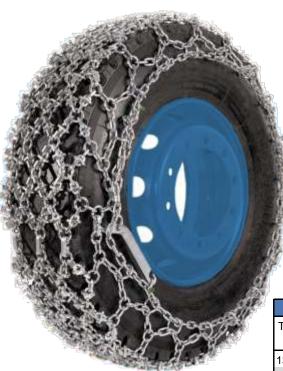

- •Heavy equipment tire chains are designed for maximum traction in rugged commercial applications
- •Manufactured using Pewag superior **TITANGrip®** alloy steel with welded wear bars for extra traction and durability
- •Double diamond net pattern design delivers maximum lateral and forward traction
- •Erzberg "ED" tire chains are suitable for on and off road use and are highly recommended for snow removal or any heavy duty application where continuous use of tire chain is required
- •Replacement parts available at your local retailer



Erzberg "ED" chains are available in sizes up to 51" wheels. Sizes not shown can be special ordered.

Please call for more information on these special order sizes.

	Pewag E	zberg	"ED" Heavy I	Equipme	nt Chains	
Tire Size	Stock Number	Weight	Stock Number	Weight	Stock Number	Weight
	8.2mm	Per Pair	10mm	Per Pair	12mm	Per Pair
13.00-24	ERE130024-8	405 lbs				
14.00-24			ERE140024-10	595 lbs		
17.5-25			ERE17525-10	659 lbs		
18.00-25			ERE180025-10	855 lbs		
20.5-25			ERE20525-10	775 lbs	ERE20525-12	990 lbs
23.5-25			ERE23525-10	972 lbs	ERE23525-12	1,091 lbs
26.5-25			ERE26525-10	1,047 lbs	ERE26525-12	1.240 lbs
29.5-25			ERE29525-10	1.365 lbs	ERE26525-12	1,689 lbs







(28)





Pewag Erzberg "Extension Feld" Chains


Pewag Erzberg "Extension Felds" with Wear Bars Made in 8.2mm, 10mm, and 12mm



•For more information see: PAGE 31 •For Erzberg & Universal spare parts see: PAGE 46-47

•Pewag Erzberg chains are designed to fit up to L3 tires (that have NOT been capped). For capped L4 and L5 tires, Pewag makes "Extension Felds" which can be easily added to the chains to increase the length of the chain for these types of tires.

•The use of "Extension Felds" insures the best possible fit on larger OTR tires and should be anticipated when ordering any tire chains for use on an OTR tire.

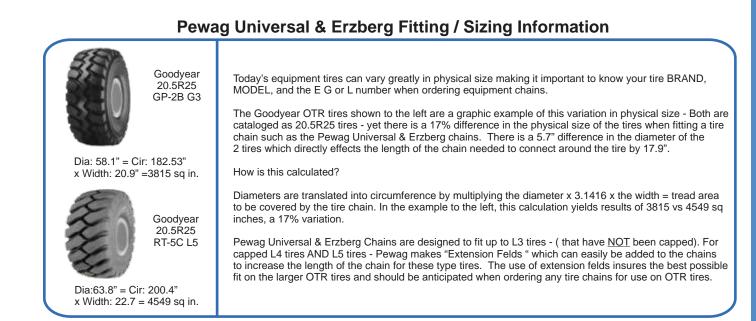

PEWAG HEAVY EQUIPMENT







Pewag COMPACT CROSS Heavy Equipment Chains

Pewag Compact Cross available in two different link designs



- •These heavy equipment tire chain are a superb blend of Pewag's tire protection and traction chain technology
- •Double Diamond Net Design features heat treated forged spiked traction links for unsurpassed traction and wear
- •Net Pattern provides for excellent self-cleaning properties while providing an exceptionally smooth ride for the operator
- •Pewag Compact Cross tire chains are suitable for all on and off road conditions where "continued use" demands exceptional traction and service life
- •Compact Cross Spike Links are available in 12mm, 14mm, 18mm, and 21mm •Compact Cross Granite Links are available in 12mm, 14mm, 16mm, and 18mm

Our Compact Cross chains are available in sizes up to 63" wheels. Sizes not shown can be special ordered.

Please call for details!



Granite Link



			Pew	ag Con	npact C	ross He	avy Eo	quipmer	nt Chai	ins	-			
Tire Size		12r	mm			14	mm		16	Smm	18	ßmm	2	1mm
	Singles	Weight	Duals	Weight	Singles	Weight	Duals	Weight	Singles	Weight	Singles	Weight	Singles	Weight
14.00-24; 385/95-24	•	432 lbs												
16.00-25; 445/95-25	•	498 lbs	•	874 lbs	•	710 lbs								
17.5-25; 445/80-25	•	468 lbs			•	750 lbs								
18.00-25; 505/95-25	•	564 lbs	•	1,028 lbs	•	806 lbs	•	1,402 lbs						
20.5-25; 525/80-25	•	600 lbs			•	762 lbs								
23.5-25; 605/80-25	•	608 lbs			•	834 lbs								
26.5-25; 685/80-25	•	736 lbs			•	1,010 lbs								
29.5-25					•	1,244 lbs								
29.5-29					•	1,256 lbs								
18.00-33	•	696 lbs	•	1,234 lbs	•	918 lbs	•	1,724 lbs						
35/65-33					•	1,402 lbs			•	1,936 lbs	•	2,104 lbs		
21.00-35					•	992 lbs	•	1, 494 lbs						
24.00-35					•	1,260 lbs	•	2,184 lbs						
45/65-45									•	2,996 lbs	•	3,268 lbs		
24.00-49					•	1,672 lbs	•	2,986 lbs						
27.00-49					•	1,640 lbs	•	3,426 lbs	•	2,120 lbs	•	2,320 lbs		
30.00-51									•	2,332 lbs	•	2,986 lbs		
33.00-51									•	3,262 lbs	•	3,378 lbs		
36.00-51									•	3,430 lbs	•	3,894 lbs		
37.00-57									•	3,602 lbs	•	4,088 lbs		
40.00-57									•	4,282 lbs	•	4,282 lbs		
50/80-57													•	7,148 lbs
55/80-57													•	7,280 lbs
55/80-63													•	7,426 lbs

Heavy Equipment Chain Inquiry Form

Discos (also the time to fill in the i		
		heck boxes that best describe your tire. product you expect from Pewag Chain.
DEALER and/or CUSTOMER NAME		
PHONE NUM BER		
FAX NUM BER		
TIRE SIZE		
TIRE MANUFACTURER		
L2	L4	•For more information about tread profiles
L3	L5	and patterns see: PAGE 29
*Note : If checking "ladde	r", please also cl	neck either Standard or Double.
Patterned	Ladder*	
TYPE OF CHAIN	Standard	Double
SIZE OF CHAIN 8.2mm	10mm	12mm
NO. OF PAIRS REQUESTED	p	pair / pairs
	r	
NOTE: certain tire sizes may also require a ph	ysical measuremen	t of the tread width, sidew all height, and tire diameter.
Tread Width (A)		B.
Sidewall Height (B)		A.► /c.
Diameter (C)		



Glacier Square & Twist Link Chains

Glacier Square Link Passenger Chains



•Square link (PLC) design for extra traction and durability

Glacier Cable Chains

- •Suitable for front and rear wheel drive cars
- •Type "S" (limited clearance) vehicles
- •Adjusters recommended. Sold separately
- •Always pre-fit chains before use is required

Glacier Twist Link Passenger Chains



Twist link (PL) design

- •Suitable for front and rear wheel drive cars
- •Type "S" (limited clearance) vehicles
- •Adjusters recommended. Sold separately
- •Always pre-fit chains before use is required

Glacier Cable Chains

- •Case hardened steel rollers on cable cross members
- •Suitable for front and rear wheel drive cars
- •Type "S" (limited clearance) cars
- •Adjusters recommended. Sold separately
- •Meets all state requirements for cable traction devices
- •Always pre-fit chains before use is required

Glacier V-Trac Cable Chains



- •Diagonal pattern cross members for smooth ride
- •Compatible with ABS, Traction Control and AWD cars
- •Meets S.A.E. Class "S" (limited clearance) cars
- •Supplied with rubber tensioner
- •Meets all state requirements for cable traction devices
- •Always pre-fit chains before use is required

(32)



Glacier Twist and Square Link Chains

Glacier Twist Link Truck Chains



- Features cam style ("SC") side chain
 Twist link cross chain case hardened to N.A.C.M. specifications
- Regular "S" side chain (Without cam locks) available by special order

Glacier Square Link Truck Chains



- •Features cam style ("SC") side chain
- •Square cross chain; case hardened to N.A.C.M. specifications
- •Regular "S" side chain (Without cam locks) available by special order

Glacier Cable and V-Trac Cable Chains

Glacier Truck Cable Chains



Case hardened spring rollers for longer wear
Meets all state requirements for cable traction devices
Heavy duty lever fastener for added tightening
Light weight and easy to install

Glacier V-Trac Truck Cable Chains



- •Diagonal pattern design for smoother ride
- •Can be installed without moving vehicle
- •Case hardened spring rollers for longer wear
- •Light weight and easy to install
- •Meets all state requirements for cable traction devices

(33)



Glacier Heavy Truck Cable Chains

Glacier Truck Cable Chains







•Case hardened spring rollers for longer wear •Heavy duty lever fastener for added tightening •Light weight and easy to install



Diagonal pattern design for smoother ride
Can be installed without moving vehicle
Case hardened spring rollers for longer wear
Light weight and easy to install

6087

0000000000

Glacier Emergency Chains





·Ideal for emergency and short use situations

- Twist link cross chain case hardened construction
 EASY-ON, EASY-OFF installation, requires wheels with holes or slots for mounting
- 6081 / 6083

			Glacier Emergency Chain			
Stock No.	Trade Size	Application	Description	Rim Size	Standard packaging	Weight
6081	4/0	Light Truck	Chain Fastener, 1 Cross Chain	15 - 18"	1 pair	1.5 lbs
6083	6/0	Heavy Truck	Chain Fastener, 1 Cross Chain	19.5 - 24.5"	1 pair	2 lbs
6085V	7/0	V-bar Heavy Truck	Chain Fastener, 2 V-bar Cross Chains	19.5 - 24.5"	1 pair	13 lbs
6086V	6/0	V-bar Heavy Truck	Web Strap Fastener, 2 V-bar Cross Chains	19.5 - 24.5"	1 pair	8 lbs
6087	4/0	Light Truck	Web Strap Fastener, 2 Cross Chains	15 - 18"	1 pair	3 lbs
6088V	7/0 V-Bar	V-bar Heavy Truck	Wide Base Tire Chain Fastener	(385 -455) Tire Width	1 pair	14.6 lbs

Please call so we can help you find the ideal Emergency Chain for your vehicle.

(34)

For more information, call : Tire Chain Division 800-445-2895 or TPC / Industrial Chain Division 800-526-3924



Glacier Twist Link and V-Bar Chains

Glacier Twist Link Truck Chains



Feature cam style ("SC") side chain
Twist link cross chain; case hardened to N.A.C.M. specifications
Side chain (without cam locks) available by special order
Also available in our Heavy Duty / "HD" Chain, Call for more info

Glacier V-Bar Truck Chains



•Case hardened, V-Bar twist link cross chain •Twist link V-Bar designed for extra traction •For on and off road application

•Side chain (without cam locks) available by special order

Glacier Mud Service and Square Link Chains

Glacier Mud Service Chain



- •Extra heavy duty cross chain design for maximum traction off-road
- •Twist link cross chain case hardened to N.A.C.M. specifications
- •Ideal for use in heavy snow and mud





•Feature cam style ("SC") side chain •Square cross chain case hardened to N.A.C.M. specifications •Side chain (Without cam locks) available by special order





Glacier Wide Base Tire Chains



Light and Heavy Trucks

- •Single tire mount: for high floatation, wide base rim tires and super singles
- •Dual tire mount: for dual tires and wheels with minimal space between tires
- Both Cam and Non-Cam side chain available by request





Available in duals Optional multi-arm adjuster

Glacier Small Equipment Chains Snow Blowers, Garden Tractors and Small Equipment



Heavy duty twist link cross chains
2 link spacing for maximum traction and smooth operation

Glacier Small Equipment Chains											
Tire Size	Stock No.	Weight		Tire Size	Stock No.	Weight		Tire Size	Stock No.	Weight	
10/10.5-2.75	SE3301	3 lbs		14x4-6	SE1301	11 lbs		20x10-10	SE7145	20 lbs	
10-3	SE3301	3 lbs		15x5-6	SE3300	12 lbs		22x10-10	SE1308	19 lbs	
12x-3	SE3308	3 lbs		15x6-6	SE3300	12 lbs		6-12	SE5313	19 lbs	
10.25-3.25	SE3301	3 lbs		4/4.8-8	SE1301	11 lbs		7/8-12	SE4300	22 lbs	
4.1/350-4	SE7106	3 lbs		5/5.7-8	SE3303	16 lbs		12-12	SE5308	30 lbs	
3.4/3-5	SE7106	3 lbs		16x6.5-8	SE3300	12 lbs		23x7.5-12	SE5313	19 lbs	
4.1/3.5-5	SE3302	4 lbs		18x6.5-8	SE3312	14 lbs		23x8.5-12	SE4300	22 lbs	
4.1/3.5-6	SE3302	4 lbs		18x8.5-8	SE3307	15 lbs		23x9.5-12	SE5307	25 lbs	
12x3.5-6	SE3302	4 lbs		18x9.5-8	SE3305	16 lbs		23x10.5-12	SE5307	25 lbs	
12.25x3.5-6	SE3302	4 lbs		20x8-8	SE1308	19 lbs		24x12-12	SE5308	30 lbs	
13x5-6	SE7129	6 lbs		20x10-8	SE7145	20 lbs		26x12-12	SE5308	30 lbs	
13x6.5-6	SE1301	11 lbs		20x8-10	SE1308	19 lbs		27x12-12	SE5308	30 lbs	

Glacier ATV Chains

2 Link Spacing, V-Bar Reinforced

•Heavy duty 4/0 cross chain

•2 link spacing for maximum traction and smooth operation

Glacier ATV Chains											
Tire Size	Stock No.	Weight		Tire Size	Stock No.	Weight		Tire Size	Stock No.	Weight	
22x11-8	ATV615	28 lbs		23x10-10	ATV615	28 lbs		24x8-11	ATV611	29 lbs	
22x12-9	ATV615	28 lbs		24x11-10	ATV618	39 lbs		24x9-11	ATV618	39 lbs	
24x11-9	ATV618	39 lbs		24x12-10	ATV620	37 lbs		25x8-11	ATV612	33 lbs	
24x13-9	ATV620	37 lbs		25x8-10	ATV612	33 lbs		24x8-12	ATV618	39 lbs	
25x12-9	ATV620	37 lbs		25x11-10	ATV620	37 lbs		25x10-12	ATV618	39 lbs	
25x13-9	ATV620	37 lbs		25x12-10	ATV620	37 lbs		25x11-12	ATV620	37 lbs	
25x13.5-9	ATV620	37 lbs		20x8-11	ATV610	26 lbs		26x8-12	ATV611	29 lbs	
22x10-10	ATV615	28 lbs		22x8-11	ATV610	26 lbs		26x11-12	ATV620	37 lbs	
22x11-10	ATV615	28 lbs		23x8-11	ATV611	29 lbs		23x5.5-14	ATV611	29 lbs	
			•				-	23x8.5x14	ATV611	29 lbs	


•Custom chains are available for any tire size. Call for details





Glacier O.T.R. Chains

Designed for Plows, Scrapers, Loaders, Graders, and Backhoes

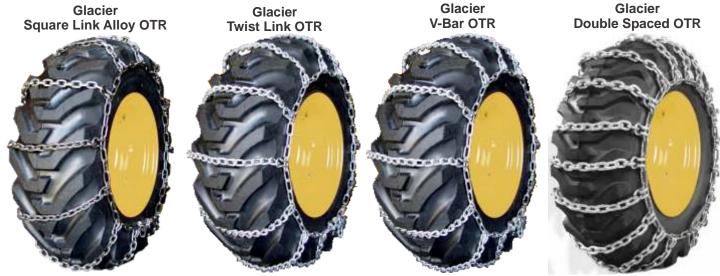

Glacier O.T.R. equipment chains are available in three different styles: twist link, square link, and V-Bar. Double link spacing is available upon request.

Glacier Tw	Glacier Twist Link OTR							
Tire Size	Tw ist Link	Weight	Cross Chain	V-Bar	Weight	Cross Chain		
	Stock No.	Per Pair	Stock No.	Stock No.	Per Pair	Stock No.		
13.00-24; 14.00-20/21;15.5-25; 445/95-25	H2612S	112lbs	H6630	H2912S	128 lbs	H6930		
14.00-24; 14.00-25; 385/95-24; 385/95-25	H2615S	130 lbs	H6630	H2915S	148 lbs	H6930		
16.00-20/21;17.5-25; 445/80-25	H2624S	158 lbs	H6640	H2924S	177 lbs	H6940		
16.00-24;16.00-25; 19.5L-24; 445/95-25	H2627S	176 lbs	H6640	H2927S	203 lbs	H6940		
20.5-25; 525/80-25	H2633S	194 lbs	H6650					
18.00-25; 18.00-26; 505/95-25	H2636S	206 lbs	H6650					
18.00-33; 600/65-25	H2642S	247 lbs	H6650					
23.5-25; 25.5-25; 605/80-25	H2645S	354 lbs	H6660					
21.00-24; 21.00-25	H2648S	380 lbs	H6660					
21.00-35	H2654S	440 lbs	H6660					
26.5-25; 686/80-25	H2657S	438 lbs	H6670					
24.00-25; 26.5-29	H2660S	461 lbs	H6670					
29.5-25	H2672S	489 lbs	H6680					
29.5-29	H2675S	516 lbs	H6680					

	Glacie	r Squar	e Link OTR				
Tire Size	Square Link	8	Weight	10	Weight	12	Weight
	Stock No.	mm	Per Pair	mm	Per Pair	mm	Per Pair
13.00-24; 14.00-20/21;15.5-25; 445/95-25	H2712SL	•	96 lbs	٠	127 lbs		
14.00-24; 14.00-25; 385/95-24; 385/95-25	H2715SL	•	104 lbs	•	145 lbs		
16.00-20/21;17.5-25; 445/80-25	H2724SL			•	142 lbs	•	193 lbs
16.00-24;16.00-25; 19.5L-24; 445/95-25	H2727SL			•	167 lbs	•	220 lbs
20.5-25; 525/80-25	H2733SL			•	175 lbs	•	261 lbs
18.00-25; 18.00-26; 505/95-25, 600/65-25	H2736SL			•	195 lbs	•	243 lbs
18.00-33	H2742SL			•	232 lbs	•	284 lbs
23.5-25; 25.5-25; 605/80-25	H2745SL					•	300 lbs
21.00-24; 21.00-25	H2748SL					•	298 lbs
21.00-35	H2754SL					•	351 lbs
26.5-25; 686/80-25	H2757SL					•	346 lbs
24.00-25; 26.5-29	H2760SL					•	356 lbs
29.5-25	H2772SL					•	403 lbs
29.5-29	H2775SL					•	427 lbs

(37)





Pewag & Glacier Tractor Chains

Ladder Style Tractor Chains - For Mud and Field Traction

Pewag "All-Square" Tractor



Glacier Twist Link Tractor



•Our tractor chains are available in 2 and 4 link spacing as well as various other millimeter sizes (not listed) by request.

		Pewa	g			Gla	cier			Pewag	g			Glacier	
	Square	Cross	8.2	10	12	Tw ist	Cross		Square	Cross	8.2	10	12	Tw ist	Cross
Tire Size	Stock No.	Chain No.	mm	mm	mm	Stock No.	Chain No.	Tire Size	Stock No.	Chain No.	mm	mm	mm	Stock No.	Chain No.
8.2-24	E0822	E6434	•			H0822	H6434	13.6-38	E0866	E7420		٠	•	H0866	H7420
8.3-16						H0821	H6266	13.9-36	E0866	E7420		•	•	H0866	H7420
9.5-16	E0829	E6434	•			H0829	H6434	14.9-24	E0859	E7420	•	•		H0859	H7420
9.5-24	E0832	E6434	•			H0832	H6434	14.9-26	E0869	E7420		•	•	H0869	H7420
9.5-28	E0836	E6445	•			H0836	H6445	14.9-28	E0869	E7420		•	•	H0869	H7420
9.5-32	E0838	E6445	•			H0838	H6445	14.9-38	E0871	E7420		•	•	H0871	H7420
10.5/80-18	E0822	E6256	•			H0822	H6434	15-22.5	E0852	E6445	•	•		H0852	H6445
11.2-24	E0836	E6445	•			H0836	H6445	15.5-38	E0879	E7426		•	•	H0879	H7426
11.2-28	E0838	E6445	•			H0838	H6445	16.9-24	E0874	E7426		•	•	H0874	H7426
11.2-34	E0846	E6445	•			H0846	H6445	16.9-28	E0876	E7426		•	•	H0876	H7426
11.2-36	E0846	E6445	•			H0846	H6445	16.9-30	E0877	E7426		•	•	H0877	H7426
11.2-38	E0862	E6445	•	•		H0862	H6445	16.9-34	E0879	E7426		•	•	H0879	H7426
12.4-16	E0831	E6445	•			H0831	H6435	17.5-24	E0874	E7426		•	•	H0874	H7426
12.4-24	E0852	E6445	•	•		H0852	H6445	18.4-16.1	E0881	E9562		•	•	H0881	H9562
12.4-28	E0856	E6445	•	•		H0856	H6445	18.4-24	E0883	E9562		•	•	H0883	H9562
12.4-36	E0862	E6445	•	•		H0862	H6445	18.4-26	E0883	E9562		•	•	H0883	H9562
12.4-38	E0862	E6445	•	•		H0862	H0862	18.4-28	E0884	E9562		•	•	H0884	H9562
12.5/80-18	E0834	E6445	•			H0834	H6445	18.4-30	E0885	E9562		•	•	H0885	H9562
13.5-16	E0820	E6266	•			H0820	H6266	18.4-34	E0887	E9562		•	•	H0887	H9562
13.6-16	E0850	E7420	•	•		H0850	H7420	18.4-38	E0889	E9562		•	•	H0889	H9562
13.6-24	E0858	E7420	•	•		H0858	H7420	18.4-42	E0894	E9562		•	•	H0894	H9562
13.6-26	E0858	E7420	•	•		H0858	H7420	19.5-24	E0883	E9562		•	•	H0883	H9562
13.6-28	E0859	E7420	•	•		H0859	H7420	20.8-34	E0890	E6650		•	•	H0890	H6650
13.6-36	E0866	E7420		•	•	H0866	H7420	20.8-38	E0892	E6550		•	•	H0892	H6550
								21-24	E0885	E9562		•	•	H0885	H9562
0								21.5-16	E0882	E9562		•	•	H0882	H9562
•Custom c	Custom chains are available for any tire size. Call for details 23.1-26 E0891 E9567 • • H0891 H9567														

(38)

For more information, call : Tire Chain Division 800-445-2895 or TPC / Industrial Chain Division 800-526-3924

23.1-34

E0895

E9567

H0895

H9567



Glacier Square Link Duo Tractor Chains

Glacier Square Link "H" Pattern Traction Chain



•Alloy steel construction for superior wear •Designed for use on farm and agricultural elements •"H" pattern design keeps the chain on top of the tread •New 8mm, Square Link construction, designed for better traction •Use for field and mud applications



Glacier Square Li	nk Duo Tra	actor Chai	ins	
Tire Size	Stock No.	Weight	Cross Chain	Cross Chains
The Size	STOCK NO.	Per Pair	Stock No.	Per 1/2 Pair
9.5-24; 9.5-28; 11.2-24; 280/85-24	H214SL	97 lbs	H292SL	8
9.5-36; 9.5-38; 11.2-32; 12.4-28; 320/85-28	H218SL	120 lbs	H292SL	10
11.2-34; 11.2-36	H224SL	131 lbs	H292SL	11
10.5/80-18; 12-16; 315/75-15; 12.5/80-18	H225SL	74 lbs	H292SL	6
9.5-44	H227SL	154 lbs	H292SL	13
9.5-32; 11.2-28; 355/80-20; 12.4-24; 320/85-24	H229SL	110 lbs	H292SL	9
11.2-38; 11.2-44; 12.4-36; 12.4-38; 320/85-36	H232SL	150 lbs	H292SL	12
9.5-48; 11.2-44	H236SL	143 lbs	H292SL	14
13.6-28; 13.9-36; 320/85-34; 340/85-28	H242SL	140 lbs	H294SL	11
13.6-36; 13.6-38; 340/85-36; 340/85-38	H246SL	154 lbs	H294SL	12
11.2-48; 12.4-40; 12.4-42	H247SL	167 lbs	H294SL	13
13.6-24; 13.6-26; 14.9-24; 340/85-24; 380/85-24	H240SL	122 lbs	H295SL	9
14.9-26	H250SL	135 lbs	H295SL	10
14.9-28; 14.9-30; 380/85-28	H252SL	148 lbs	H295SL	11
17.5-24; 17.5L-24	H263SL	118 lbs	H296SL	8
16.9-26; 16.9-28; 420/85-28	H262SL	146 lbs	H296SL	10
16.9-30; 16.9-32; 420/85-30	H266SL	158 lbs	H296SL	11
16.9-34; 16.9-38; 420/85-34; 420/85-38	H270SL	169 lbs	H296SL	12
12.4-52; 320/90-50	H255SL	185 lbs	H296SL	13
420/80-46	H256SL	199 lbs	H296SL	14
12.4-48	H259SL	213 lbs	H296SL	15
18.4-16.1; 21.5L-16.1	H264SL	113 lbs	H298SL	7
18.4-24; 19.5L-24	H268SL	144 lbs	H298SL	9
18.4-26; 18.4-28; 18.4-30; 460/85-30	H271SL	165 lbs	H298SL	10
18.4-34; 460/85-34	H273SL	175 lbs	H298SL	11
16.9-38; 18.4-38; 20.8-34; 460/85-38	H272SL	190 lbs	H298SL	12
18.4-42; 18.4-46; 460/85-42; 460/85-46	H277SL	221 lbs	H298SL	14
21L-24	H275SL	162 lbs	H299SL	8
20.8-38; 520/85-38	H276SL	225 lbs	H299SL	13



Pewag Studded Truck Chains

7mm Heavy Truck Studded Alloy Twist Link



- •7mm studded cross chain made of premium Pewag alloy steel for extended wear and strength
- •Especially designed for aggressive off-road applications





Available in duals Optional multi-arm adjuster

Pewag 7mm Studded Truck Chains								
Tire Size	Singles	Duals	Cross Chain					
10.00-22	KST2249S	KST4249S	KST6253					
295/80-22.5	KST2249S	KST4249S	KST6253					
11-24.5	KST2249S	KST4249S	KST6253					
315/75-24.5	KST2249S	KST4249S	KST6253					

Pewag Studded Truck Chains

8mm Heavy Truck Studded Alloy Twist Link



- •8mm studded cross chain made of premium Pewag alloy steel for extended wear and strength
- •Especially designed for aggressive off-road applications





Available in duals Optional multi-arm adjuster

Pewag 8mm Studded Truck Chains										
Tire Size	Singles	Duals	Cross Chain							
10.00-22	KST2249S 8mm	KST4249S 8mm	KST6253 8mm							
295/80-22.5	KST2249S 8mm	KST4249S 8mm	KST6253 8mm							
11-24.5	KST2249S 8mm	KST4249S 8mm	KST6253 8mm							
315/75-24.5	KST2249S 8mm	KST4249S 8mm	KST6253 8mm							



Glacier Studded Truck Chains



Heavy Truck Studded Alloy Twist Link

- Especially designed for aggressive off-road applications
 8mm studded cross chain made of tough alloy steel for extended wear and strength
- •Short pitch 7/0 side chain for extra durability and reduced weight

Glacier Studded Truck Chains									
Tire Size	Singles	Duals	Cross Chain						
10.00-22	GST2249S	GST4249S	GST6253						
295/80-22.5	GST2249S	GST4249S	GST6253						
11-24.5	GST2249S	GST4249S	GST6253						
315/75-24.5	GST2249S	GST4249S	GST6253						

Glacier Ring Skidder Chains



9/16" and 5/8" Fixed Ring Skidder Chains

•Hardened carbon steel construction •Fixed ring design

Glacier Ring Skidder Chains										
Tire	Stock Number	Ring Size	Number of Rings	Tag Chain Wire Size	Weight Per Pair					
18.4-26	GRS001	1 1/8 (28mm)	10	9/16 (14mm)	625 lbs					
16.9-30	GRS001	1 1/8 (28mm)	10	9/16 (14mm)	625 lbs					
23.1-26	GRS002	1 1/8 (28mm)	11	5/8 (16mm)	749 lbs					
18.4-34	GRS002	1 1/8 (28mm)	11	5/8 (16mm)	749 lbs					
24.5-32	GRS003	1 1/8 (28mm)	13	5/8 (16mm)	865 lbs					
28L-26	GRS004	1 1/8 (28mm)	10	5/8 (16mm)	743 lbs					
30.5-32	GRS005	1 1/8 (28mm)	9	5/8 (16mm)	786 lbs					

Glacier Net Skidder Chains

- 5/8" Studded Net Skidder Chains
 - •Studded link cross chain
 - •Double diamond pattern for maximum traction

	Glacier Net Skidder Chains										
Tire Size	Stock Number	Chain Size	Weight Per Pair								
18.4-26	GDDS001	5/8 (16mm)	814 lbs								
16.9-30	GDDS001	5/8 (16mm)	814 lbs								
23.1-26	GDDS002	5/8 (16mm)	916 lbs								
18.4-34	GDDS002	5/8 (16mm)	916 lbs								
24.5-32	GDDS003	5/8 (16mm)	968 lbs								
28L-26	GDDS004	5/8 (16mm)	975 lbs								
30.5-32	GDDS005	5/8 (16mm)	1130 lbs								











Pewag and Glacier Side Chain



Pewag and Glacier Cross Chain

10mm

	Pewag Hardened and Standard Side Chain										
Stock No.	Trade Size	Туре	Diameter	Application	Package	Package Weight					
1004A	4/0		.219 (7/32")	Light Truck	100'	34.5 lbs					
1006A	6/0		.281 (9/32")	Truck	100'	55.8 lbs					
1007A	7/0		.312 (5/16")	Truck/Equip	100'	70.4 lbs					
1008	7/0	Hardened	.312 (5/16")	Truck/Equip	100'	68 lbs					
1009A	9/0		.375 (3/8")	Heavy Equip	100'	108 lbs					
1010	9/0	Hardened	.375 (3/8")	Heavy Equip	100'	104 lbs					
1011A	11/0		.437 (7/16")	Heavy Equip	100'	138 lbs					
1012	11/0	Hardened	.437 (7/16")	Heavy Equip	100'	141 lbs					

G	lacier Ca	m-Side Ch	hain
Stock No.	Trade Size	Diameter	Application
1016	6/0 3cams	.219 (7/32")	Light Truck
1017	4/0 4cams	.281 (9/32")	Truck
1019	7/0 4cams	.312 (5/16")	Truck/Equip
	5		

	Glacier Standard Side Chain											
Stock No.	Trade Size	Diameter	Application	Package	Package Weight							
1004	4/0	.219 (7/32")	Light Truck	100'	34.5 lbs							
1006	6/0	.281 (9/32")	Truck	100'	55.8 lbs							
1007	7/0	.312 (5/16")	Truck/Equip	100'	70.4 lbs							
1009	9/0	.375 (3/8")	Heavy Equip	100'	108 lbs							
1011	11/0	.437 (7/16")	Heavy Equip	100'	138 lbs							
1013	13/0	.512 (1/2")	Heavy Equip	100'	236 lbs							

Glacier Cam-Side Chain

	Stock no.
	3003
	3004
Change Change Change Change Change	3005
Dever Herdened Covere Link	3007
Pewag Hardened Square Link	3008
	3010
	3012
Pewag Hardened Twisted Square Link	3008TSL
Fewag Hardened Twisted Square Link	3010TSL
	A
	Stock No.
	2004
(AT2/2)/5/5/5/6/6/6/	2006
Glacier Twist Link	2007
Glacier Twist Link	2009 2011
	2011
	2014
DJJJJJ 77777	2008TSL
000000000000	2010TSL
Glacier Twisted Square Link	2010102
	2005SL
	2007SL
	2008SL
	2010SL
Glacier Square Link	2012SL

				_		
		Pewa	ig Hardened	Square Li	hk	
	Stock no.	Trade Size	Diameter	Application	Package	Weight
	3003	3.7mm	.145(9/64")	Passenger	100'	21.2 lbs
	3004	4.5mm	.177 (5/32")	Passenger	100'	31.2 lbs
0	3005	5.6mm	.220 (3/16")	Light Truck	100'	49 lbs
<i>P</i>	3007	7.0mm	.275 (1/4")	Truck	100'	78 lbs
	3008	8.2mm	.322 (5/16")	Truck/Equip	100'	108 lbs
	3010	10mm	.409 (3/8")	Heavy Equip	100'	162 lbs
	3012	12mm	.472 (7/16")	Heavy Equip	50'	117 lbs
		Pewag Ha	ardened Twi	sted Squar	e Link	
	3008TSL	8.2mm	.322 (5/16")	Truck/Equip	100'	108 lbs

.409 (3/8")

Heavy Equip

100'

162 lbs

	Glad	cier Hardene	d Twict Lin		-
			1		1
Stock No.	Trade Size	Diameter	Application	Package	Weight
2004	4/0	.219 (7/32")	Light Truck	100'	24 lbs
2006	6/0	.281 (9/32")	Truck	100'	35 lbs
2007	7/0	.312 (5/16")	Heavy Truck	50'	41 lbs
2009	9/0	.375 (3/8")	Heavy Equip	50'	68 lbs
2011	11/0	.437 (7/16")	Heavy Equip	50'	92 lbs
2014	14/0	.531 (17/32")	Heavy Equip	50'	140 lbs
	Glacier H	ardened Twi	sted Square	e Link	
2008TSL	8mm	.315 (5/16")	Truck/Equip	50'	48 lbs
2010TSL	10mm	.409 (3/8")	Heavy Equip	50'	83 lbs
	Glaci	er Hardened	Square Lir	ık	
2005SL	5.6mm	.220 (3/16")	Light Truck	100'	47 lbs
2007SL	7mm	.275 (1/4")	Truck	100'	82 lbs
2008SL	8mm	.315 (5/16")	Truck/Equip	100'	94 lbs
2010SL	10mm	.409 (3/8")	Heavy Equip	100'	147 lbs
2012SL	12mm	.472 (7/16")	Heavy Equip	50'	112 lbs

(42)





Spring Adjuster



Passenger, Light and Heavy Truck Rubber Adjuster

Multi-Arm Adjuster

Chain Tighteners

15" Tarp Strap

		Tire Chain Tighter	ners		
Stock No.	Description	Application	Rim Size	Package	Package Weight
94	Spring & Chain	Light Truck	16 - 20"	4	1.2 lbs
96	15" Tarp Strap	Heavy Truck		50	12 lbs
97	Rubber Adjuster	Heavy Truck	18.5 - 24.5"	25	19 lbs
98	Spring & Chain	Heavy Truck	19.5 - 24.5"	4	4 lbs
99	Rubber Adjuster	Light Truck	15 - 18"	80	40 lbs
100	Rubber Adjuster	Passenger	12 - 17"	80	35 lbs
101	Rubber Adjuster	Heavy Equipment & Tractor	20 - 33"	20	3 lbs
102	Rubber Adjuster	Snow blow er & GT	6 - 8"	10	6 lbs
103	Multi Arm Adjuster	Heavy Truck	18.5 - 24.5"	25	1.5 lbs
105	Multi Arm Adjuster	Light Truck	15 - 18"	40	1 lbs

Tire Chain Repair Tools



The Chain Repair Tools & Parts									
Stock No.	Description	Application	Length	Package	Weight				
BC36	Bolt Cutters	ALL	36"	1	12 lbs				
200	Handheld Chain Tool	Passenger	7"	1	0.35 lbs				
201 (Import)	Short Handled Chain Tool	Light & Heavy Truck	22"	1	7.95 lbs				
202 (Import)	Long Handled Chain Tool	Light & Heavy Truck	33"	1	10.4 lbs				
203 (Domestic)	Long Handled Chain Tool	Light & Heavy Truck	33"	1	9.4 lbs				
202A	Chain Plier Replacement Jaw			1	2.2 lbs				

(43)





Cross Chain Hooks



Cross Chain Hooks									
Stock Number	Trade Size	Diameter	Cross Chain Application	Standard package	Package Weight				
403	3/0	.207 (13/64")	Passenger	50	1.26 lbs				
405	5/0	.250 (1/4")	Light Truck	50	3.5 lbs				
406	6/0	.281 (9/32")	Truck	50	5.5 lbs				
407	7/0	.312 (5/16")	Heavy Truck	50	8.2 lbs				
409	9/0	.375 (3/8")	Small Equipment	50	13.3 lbs				
410	10/0	.406 (13/32")	Small Equipment	50	17.6 lbs				
411	11/0	.433 (7/16")	Heavy Equipment	50	21.8 lbs				
413	13/0	.512 (33/64")	Heavy Equipment	50	32.2 lbs				

Cross Chain Swivel Hooks



Stock N







	509	5858SP	5864	5862	5861
		Cro	ss Chain Swivel Hook	(S	
tock Number	Trade Size	Diameter	Application	Standard Package	Package Weight
505	4/0		Light Truck	25	3.5 lbs
507	7/0		Truck	25	5.9 lbs
509	9/0	.437 (7/16")	Heavy Equipment	25	6 lbs
511	11/0	.563 (9/16")	Heavy Equipment	25	12 lbs
513	14/0		Heavy Equipment	25	13.3 lbs
5858SP	11/0	.563 (9/16")	8.2mm, 10mm Cross Chain	25	7 lbs
5861	Ruggo	.437 (7/16")	8.2mm, 10mm, 9/0, 11/0	25	15 lbs
5862	Ruggo Hanger	.375 (3/8")	Ruggo, 509, 5858SP	25	6 lbs
5864	Ruggo Washer		For Stock No. 5861	100	5.8 lbs

Side Chain Speed Hook



Side Chain Speed Hook							
Stock Number	Trade Size	Diameter	Application	Standard Package	Package Weight		
318	3/0	.207 (13/64")	PL Passenger	100	3 lbs		
319	6/0	.281 (9/32")	Light Truck	100	8.5 lbs		
320	9/0	.375 (3/8")	Heavy Truck	100	21 lbs		
324	11/0	.468 (15/32")	Heavy Equipment	100	25.5 lbs		

(44)





Accessories and Repair Parts



A	Sec.	
1	-	-0
æ	0	
0	-	-







8260

	Pewag Cross Chain Repair Links								
Stock No.	Trade Size	Diameter	Application	Standard Package	Package Weight				
705	5.6mm	3/16	Light Truck	10	0.33 lbs				
707	7mm	1/4	Heavy Truck	10	0.63 lbs				
708	8.2mm	5/16	Heavy Truck & Equipment	10	1.12 lbs				
710	10mm	3/8	Heavy Equipment	10	2.11 lbs				
712	12mm	7/16	Heavy Equipment	10	3.25 lbs				

Side Chain Repair Link							
Stock No.	Trade Size	Diameter	Application	Standard Package	Package Weight		
603	3.5mm	1/8 x 3/4"	Passenger	25	0.31 lbs		
605	5.6mm	3/16 x 1 1/16"	Light Truck	25	1 lbs		
607	7mm	1/4 x 1 3/8"	Heavy Truck	25	2 lbs		
608	8mm	5/16 x 1 1/2"	Heavy Truck	25	3 lbs		
609SC	10mm	3/8 x 2 1/8"	Heavy Truck & Equipment	25	6.5 lbs		
610	10mm	3/8 x 1 5/8"	Heavy Truck & Equipment	25	5 lbs		

	E	mergen	cy Quick Link	(Rapid Link)	
Stock No.	Trade Size	Diameter	Application	Standard Package	Package Weight
8004	4/0	1/4"	Light Truck	20	1.0 lbs
8006	6/0	9/32"	Heavy Truck	20	1.5 lbs
8008	7/0	5/16"	Med/Heavy Equip	20	3.3 lbs
8010	9/0	3/8"	Heavy Equipment	20	6.0 lbs
8013	11/0	1/2"	Heavy Equipment	20	9.3 lbs

Stock No.	Application	Standard Package	Package Weight
5998	Light Truck	10	3 lbs
5999	Heavy Truck	10	7 lbs

Cam Tool					
Stock No.	Application	Standard Package	Package Weight		
204LT	Light Truck Cams	20	5 lbs		
204	Heavy Truck Cams	20	8 lbs		

Stock No.	Туре	Application	Standard Package	Package Weight
312	Clevis Style	Small Equipment	10	4.5 lbs
317	Clevis Style	Heavy Equipment	10	11 lbs

Lever Fasteners					
Stock No.	Туре	Application	Standard Package	Package Weight	
8220	Lever Style	PL passenger	20	1.6 lbs	
8230	Lever Style	Light Truck	20	3.5 lbs	
8250	Lever Style	Heavy Truck	20	11.6 lbs	
8260	Lever Style	Heavy Truck	20	10 lbs	
8270	Lever Style	Heavy Equipment	20	21 lbs	
5297	Lever Style	Universal Tension Chain	20	36 lbs	
	8270		iversal Tensi	on Chain	





Package

Weight

3 lbs

6 lbs

Universal and Erzberg Repair Parts

Trade

Size

3/8"

1/2"

Stock

Number

Shackle 3/8"

Shackle 1/2"







Warning: For Tire Chain Use Only - Not for overhead lifting, load securement or any other purpose. Glacier Screw Pin Shackles - (Screw Pin is Non-Load Rated)

Application

Heavy Equipment

Heavy Equipment


Standard

Package


10

	Pewag Coupling Ring								
Stock	Description	Application	Standard	Package					
Number	Description	Application	Package	Weight					
7077TC	31C - 10mm Coupling Ring	8.2mm Cross Chain	10	6 lbs					
7078TC	31D - 12mm Coupling Ring	10mm Cross Chain	10	7 lbs					
7079TC	31E - 14mm Coupling Ring	12mm Cross Chain	10	12 lbs					
33254TC	31G - 18mm Coupling Ring	16mm Cross Chain	10	23 lbs					





	Pewag Alloy Weld On Bucket Hook BH							
Stock Number	Weight Load Limit (Ib 4:1)	Α	В	С	D	Standard Package	•	
BH-1TC	200	4.12	1	0.87	3	1	1.25 lbs	
BH-3TC	6000	4.87	1.25	1.12	3.37	1	2.30 lbs	
BH-4TC	8000	5.75	1.37	1.25	4	1	4.25 lbs	
BH-5TC	10000	6	1.37	1.25	4.25	1	4.75 lbs	
BH-8TC	16000	8.12	1.62	1.75	5	1	8.50 lbs	
BH-10TC	20000	8.5	2	1.75	5.5	1	11.75 lbs	

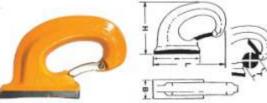

	Pewag Alloy Weld On Bucket Hook C							
Stock Number	Working Load Limit 5:1 Metric Tons	L	I	н	В	т	Standard Package	•
BH-C8TC	8	9.84	5.9	6.69	2.36	1.77	10	15.61 lbs
BH-C10TC	10	10.04	6.3	6.89	2.75	1.97	10	17.63 lbs
BH-C18TC	18	11.41	6.69	7.48	3.15	1.97	10	23.80 Lbs







Universal and Erzberg Repair Parts



Pewag VBS Pin Lock Repair Link						
Stock	Description	Application	Standard	Package		
Number	Description	Application	Package	Weight		
6177TC	39D - 12mm VBS Pin Lock	10mm Cross Chain	10	6 lbs		
6035TC	39E - 14mm VBS Pin Lock	12mm Cross Chain	10	6 lbs		



Pewag TPC Pin Lock Repair Link							
Stock	Description	Application	Standard	Package			
Number	Description	Application	Package	Weight			
7084TC	Pewag 37C - 10mm Pin Lock	8.2mm Cross Chain	10	5 lbs			
7085TC	Pewag 37D - 12mm Pin Lock	10mm Cross Chain	10	7 lbs			
11966TC	Pewag 37E - 14mm Pin Lock	12mm Cross Chain	10	9 lbs			



	Glacier Pin Lock Repair Link								
Stock	Description	Application	Standard	Package					
Number	Description	Application	Package	Weight					
908	Glacier 8.2mm Pin Lock	8.2mm Cross Chain	10	2 lbs					
910	Glacier 10mm Pin Lock	10mm Cross Chain	10	3.5 lbs					
912	Glacier 12mm Pin Lock	12mm Cross Chain	10	8 lbs					



		Pewag 3 Link Repair Section				
	Stock	Description	Application	Standard	Package	
	Number		Application	Package	Weight	
I	9900	3 Link Repair Section	8.2mm Cross Chain	1	0.5 lbs	
	9902	3 Link Repair Section	10mm Cross Chain	1	1 lbs	
	9904	3 Link Repair Section	12mm Cross Chain	1	2 lbs	

Pewag Middle Connecting Hook							
ſ	Stock	Description	Application	Standard	Package		
	Number	Description	Application	Package	Weight		
Ī	9008	GM 8 Middle Connecting Hook	8.2mm Cross Chain	10	3 lbs		
	9010	GM10 Middle Connecting Hook	10mm Cross Chain	10	6 lbs		
	9012	GM12 Middle Connecting Hook	12mm Cross Chain	10	10 lbs		




(47)



Pewag Grade 120 Load Binders

Load Binders for Cargo Securement and Tightening of Chains

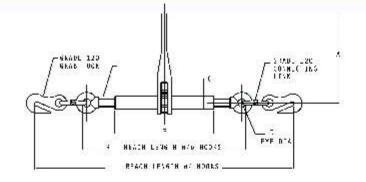

red	N: -300003 (a) -00	Nursie (mb)				I.	d= 56.3 W . 1	h bangt Foodia	B= B_0 grades	congle Trans	- Jucid N	WRSE Wikus(.)
	36		Annar	aia, s Ì i i i	des		25.	- 001	dX.	- is		spulos.
7512045	5,200	932	\$3	- 10	134	6.747	29.97	23.47	204	13.3	22 m=	3
10502048	16,500	205	44	, ie	14ń	1.32	9.78	464	202	14. 1	×= ₩.,	12
13512046	1/,400	D	14.13	613	1.97	1.22	90.97	3835h	::44%	77.48	y1 M~	15



FEATURES AND BENEFITS

- ESERENGED GRADE 120 CONSTRUCTION FOR MAX HUM WORKING LOADS
- FORGED STEEL EVER BOIT, STEEL BARREL CONSTRUCTION AND CAST HANDLE ASSEMBLY.
- HISH LOAD CARACITY TRAPEZO DAL THREAD FORM.
- HOOKS AND LINKS HEAT TREATED 70 STRADE 120 STRENGT I STANDARDS
- SHORT REACH HODKS PROVIDE FOR MAXIMUM TAKE-UP
- DOUBLE ACTING SPRING LOADED RAWLS
- WORKING LOAD LIMIT, CHAIN SIZE AND BATCH CODE STAMPED ON HANDLE WITH 1/4" FALL RAISED LETTERS
- MEETS NACH SPECIFICATION OF 4-1 DESIGN SAFETY PACTOR ON WORKINE LOAD LIMIT
- MELLIS GREXCLOS US IMESA AND OVSA REC., LA IONS INCLUDING 49 CER BARIS 392 AND 393

Lashing/Tie-Down Chain 6RADE 120-FVF 31146 -004 (R+D* 20 616.L CONVECTIVE TER ING ENGATLE DOZH C ALH 6 Ð -BALCE YOU AL ALADE LENGTH REALTALS 5567F 196 LASHCHG/TCC-DCHV CHMCH (≪ି≖sessessibesses କ୍ -SALCE > 0 AU ALADI LUNGIN ALWEINED W.L-Working 3- Lock Loch I il 71520 1220 3200 4.42 7 12 20

84

1/2

20

20

122

12:4


10100

27,900

10/200 0/20

1V420T/20

2-Part Binding & Tie Down System

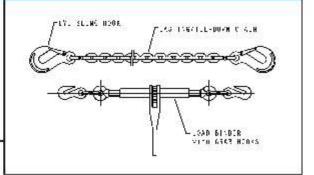

(48)

ų,

65


9820. 120 CONVECTORS INK

> 6343F 120 6863 HOUR



Pewag Grade 100 Load Binders


Load Binders for Cargo Securement and Tightening of Chains

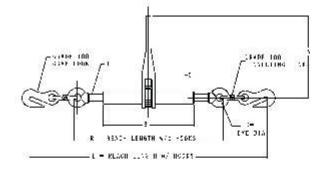

ú:de	X1.F0xrsing Load Long	and a service of the	and a second courses	and the second second second	and the second second second	Chein Size (Inch)	4	-	e	L		r length Hapes	RH Read Without		THIT THE ALL	Veight en. =/ Hopes (b)
	(H)		1000	s ms in i			mex.	mr	-15X	mr		30065				
Silcofill	5./32	5/15	5.3	020	1.30	0.484	33.5	263	20/	139	22 00	20				
1001006.0	8.800	3/8	ŀ	10	1/9	1.CZ	32.37	25.79	20.31	F.Z.	24 00	-12				
196100618	15,000	1/2	14.1)	1693	1.07	1.22	50.34	32.3	34/13	22,48	30 mm	25				

FEATURES AND BENEFITS

- HIGH STRENGTH GRADE LOC CONSTRUCTION. FOR FIGH WORKING LOAD LIMITS.
- FORGED STEEL EVE BOLT, STEEL BARREL CONSTRUCTION AND CAST HANDLE ASSEMBLY
- THE FEGAD EAFACTY TRAPEZODAE. T READ FORM
- HOOKS AND LINKS HEAT TREATED TO GRADE 100 STRENETH STANDARDS
- SHORT REACH HOOKS PROVIDE FOR MAX MUM TAKE UP
- DDF BLUACENS SPRING LOADED WAVES
- WORKING LOAD LIMIT, CHAIN SIZE AND BATCH CODE STAMPED ON HANDLE WITH 1/4" TALL RAISED LETTERS
- MELTS NACH SPECTICATION COLORS AND SAFELY FACTOR ON WORKING LOAD LIMI
- METS OR EXCEEDS US EMOSA AND SMSA REGULATIONS INCL. DING 49 CTR DARTS 397 AND 393

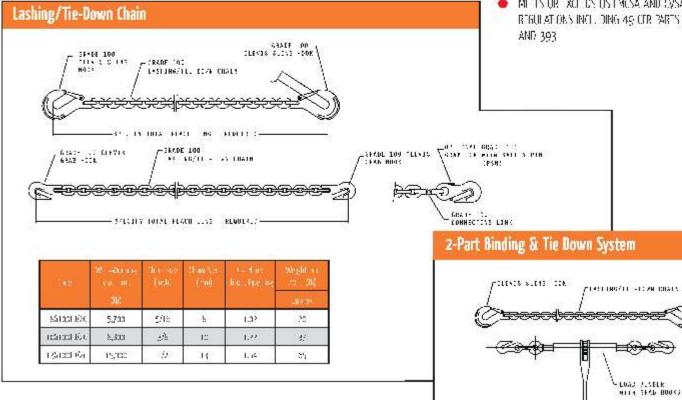

(49)



Glacier Transport Chain and Load Binders

Glacier Grade 70 Transport Chain With Grab Hooks

Glacier Grade 70 Slip Hooks

Glacier Grade 70 Grab Hooks





•Yellow chromate finish •Grade 70 meets stringent D.O.T. Regulations NOT TO BE USED FOR OVERHEADLIFTING!

	Pre-Asse	mbled Grade	70 Chain with Gral	b Hooks	
Stock No.	Trade Size	Length	Qty. per Drum	Drum Weight	Working Load
G7TC-516-16	5/16"	16 Feet	30 Pieces	540 lbs	4,700 lbs
G7TC-516-20	5/16"	20 Feet	25 Pieces	575 lbs	4,700 lbs
G7TC-516-25	5/16"	25 Feet	25 Pieces	745 lbs	4,700 lbs
G7TC-38-16	3/8"	16 Feet	25 Pieces	700 lbs	6,600 lbs
G7TC-38-20	3/8"	20 Feet	20 Pieces	620 lbs	6,600 lbs
G7TC-38-25	3/8"	25 Feet	20 Pieces	760 lbs	6,600 lbs
G7TC-12-20	1/2"	20 Feet	10 Pieces	560 lbs	11,300 lbs

		Gra	de 70 Clevis Gra	b and Slip Hook	S	
Stock No.	Description	Trade Size	Use with Chain Size	Packaging	Weight	Working Load
G7CG-516-YC	Grab Hook	5/16"	5/16"	1 Piece	0.6 lbs	4,700 lbs
G7CG-38-YC	Grab Hook	3/8"	3/8"	1 Piece	1.1 lbs	6,600 lbs
G7CG-12-YC	Grab Hook	1/2"	1/2"	1 Piece	2.4 lbs	11,300 lbs
G7CSL-516-YC	Slip Hook	5/16"	5/16"	1 Piece	0.9 lbs	4,700 lbs
G7CSL-38-YC	Slip Hook	3/8"	3/8"	1 Piece	1.5 lbs	6,600 lbs
G7CSL-12-YC	Slip Hook	1/2"	1/2"	1 Piece	2.8 lbs	11,300 lbs

	Grade	70 Continuous,	Bulk Drun	n Pac	kaging		
Stock No.	Trade Size	Link Diameter	Inside Pitch	Width	Feet Per Drum	Drum Weight	Working Load
G7-516-D-YC-ASTM	5/16"	0.343	1.00	0.48	550 Feet	640 lbs	4,700 lbs
G7-38-D-YC-ASTM	3/8"	0.394	1.26	0.57	400 Feet	596 lbs	6,600 lbs
G7-12-D-YC-ASTM	1/2"	0.51	1.70	0.75	200 Feet	476 lbs	11,300 lbs

Lever Load Binder



Powder coat finish
All forged parts
Full warranty

NOT TO BE USED FOR OVERHEADLIFTING!

		Lo	oad Binders		
Stock No.	Binder Type	Use with Chain Sizes	Standard Packaging	Packaging Weight	Working Load
LLB-51638	Lever	5/16 - 3/8"	6 Pieces	52 lbs	5,400 lbs
LLB-3812	Lever	3/8 - 1/2"	6 Pieces	60 lbs	9,200 lbs
RLB-14	Ratchet	1/4"	10 Pieces	61 lbs	2,600 lbs
RLB-51638	Ratchet	5/16 - 3/8"	2 Pieces	22 lbs	5,400 lbs
RLB-3812	Ratchet	3/8 - 1/2"	2 Pieces	25 lbs	9,200 lbs

For more information, call : Tire Chain Division 800-445-2895 or TPC / Industrial Chain Division 800-526-3924





Glacier Shoe Chains



•Aggressive chain design for maximum traction

- •Easy-on and Easy-off design
- •Ideal for outdoor use in heavy snow and ice
- •Durable elastic rubber keeps them in place

	Glacier Shoe Chains										
Stock No.	Size	Men's Shoe Size	Women's Shoe Size								
GSC - S	Shoe Chain S	2 - 5	3 - 6								
GSC - M	Shoe Chain M	5 1/2 - 8	6 1/2 - 9 1/2								
GSC - L	Shoe Chain L	8 1/2 - 10 1/2	10 and up								
GSC - XL	Shoe Chain XL	11 - 13									

Pewag Utility Tote Bags




Pewag quality tote made from tough durable nylon
Reinforced handles for easy carrying
Full zipper so your items stay in the tote
Hundreds of uses over the road, or in the shop
Available in four convenient sizes

	Pewag Utility Tote Bags	
Stock No.	Description	Dimensions
Mini Tote Bag	Up to 20 lbs	5" x 5" x 7"
Small Tote Bag	Up to 40 lbs	10" x 10" x 6"
Medium Tote Bag	Up to 55 lbs	10" x 10" x 8"
Large Tote Bag	Up to 65 lbs	10" x 10" x 13"



Corex Ramp-Up[™]

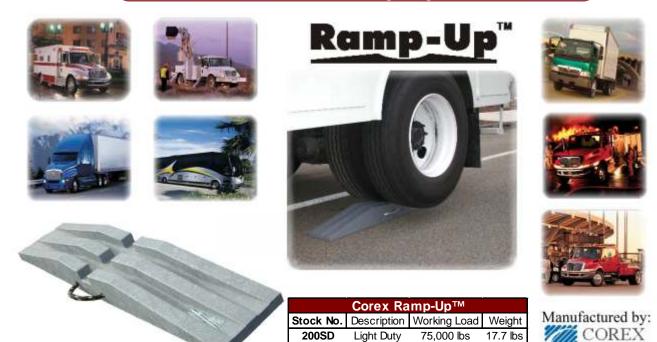

201HD

For a smooth quick installation with fewer adjustments; simply drive onto the Ramp-UpTM, chain your vehicle, and drive off.

Heavy Duty

150,000 lbs

40.8 lbs

C






- •24" for open frame mounting
- •18" for fairing package mounting



Pewag "Tow-To-Go" Chain

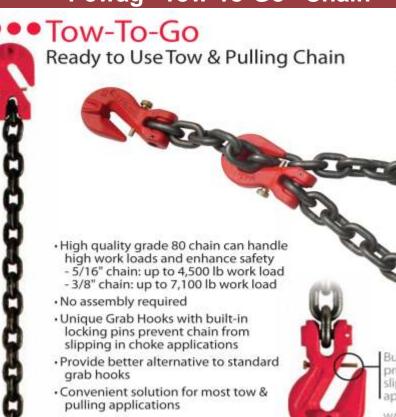

Built-in locking pins prevent chain from slipping in choke applications

new

pewag

WARNING: Locking pins are designed to retain chains under "slack" conditions only, and are not intended for supporting load.

	Pewag "T	ow-To-Go"	
Stock No.	Description	Working Load	Weight
T8810	5/16" x 10'	4,500 lbs	10.70 lbs
T8816	5/16" x 16'	4,500 lbs	16.40 lbs
T8820	5/16" x 20'	4,500 lbs	20.10 lbs
T81010	3/8" x 10'	7,100 lbs	17.86 lbs
T81016	3/8" x 16'	7,100 lbs	28.32 lbs
T81020	3/8" x 20'	7,100 lbs	32.65 lbs



Various lengths and individual components are available

Attractive retail packaging maximizes POP sales






Pewag "Sling-In-A-Box"

 Sling-In-A-Box Ready to Use Overhead Lifting Chain



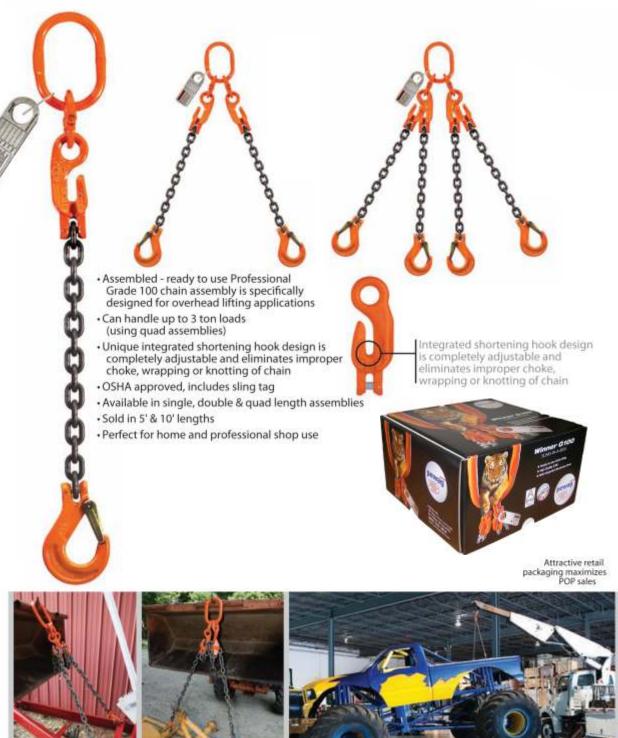



Pewag "Sling-In-A-Box"

Sling-In-A-Box Ready to Use Overhead Lifting Chain



•Custom slings are available in any size for any application. Call for details

Features & Benefits

- Ready to use Chain Sling in standardized sizes and configurations
- High quality G100 chain and components with +25% WLL compared to G80
- With integrated Pewag XK shortening hook to adjust sling length
- Components are orange powder coated finish
- Meets the 4:1 NACM design factor
- Meets the NACM standard 400 F heat resistance
- Meets the 20,000 cycle **ASTM standard fatigue** test for G100

Configuration	Description		Capaci	ity in Ib s	
		90	60	45	30
0	9/32" G100 SOS XK Single leg-single hook with 5 ' reach	4300			
Å	9/32" G100 DOS XK Double leg-sling hook with 5' reach		7400	6100	4300
R	9/32" G100 DOS XK Double leg – sling hook with 10' reach		7400	6100	4300
R	9/32" G100 QOS XK Four leg – sling hook with 5' reach		11200	9100	6400
0	3/8" G100 SOS XK Single leg – sling hook with 10' reach	8800			
R	3/8" G100 DOS XK Double leg – sling hook with 5' reach		15200	12400	8800
R	3/8" G100 DOS XK Double leg - sling hook with 10' reach		15200	12400	8800
R	3/8" G100 DOG XK Double Leg – grab hook with 10' reach		15200	12400	8800



r	Weight Per	Cross Chain	Cross Chain	Cross Chain	Cross Chain	Links Per	Cross Chain Hoo	k Side Chain	Side Chain
Stock No.	ů.	Per 1/2 Pair	Stock Number						
	Pair	Pel 1/2 Pall	Slock Number	Length w/Hooks Pewag 220		Cross Chain	Stock No./ Dia	Stock No./ Dia	Length
E2209	22	11	E6221	13.25"	5.6 mm	11	406 .281"	1004 .219"	63.9"
E2211	25	13	E6221	13.25"	5.6 mm	11	406 .281"	1004 .219"	75.1"
E2214	31	15	E6221	13.25"	5.6 mm	11	406 .281"	1004 .219"	86.2"
E2216	26	12	E6221	13.25"	5.6 mm	11	406 .281"	1004 .219"	69.5"
E2219	27	13	E6221	13.25"	5.6 mm	11	406 .281"	1004 .219"	75.1"
E2221	29	14	E6221	13.25"	5.6 mm	11	406 .281"	1004 .219"	80.6"
E2226	36	15	E6229	16.75"	5.6 mm	15	406 .281"	1004 .219"	86.2"
E2228	32	14	E6225	15.00"	5.6 mm	13	406 .281"	1004 .219"	80.6"
E2229	27	12	E6225	15.00"	5.6 mm	13	406 .281"	1004 .219"	69.5"
E2233	40	11	E6251	14.75"	7 mm	9	407 .312"	1006 .281"	83.4"
E2237	45	12	E6251	14.75"	7 mm	9	407 .312"	1006 .281"	90.6"
E2238	48	12	E6253	16.25"	7 mm	11	407 .312"	1006 .281"	90.6"
E2239	48	13	E6251	14.75"	7 mm	9	407 .312"	1006 .281"	97.8"
E2241	52	14	E6251	14.75"	7 mm	9	407 .312"	1006 .281"	105.1"
E2245	56	15	E6251	14.75"	7 mm	9	407 .312"	1006 .281"	112.3"
E2247	56	14	E6253	16.25"	7 mm	11	407 .312"	1006 .281"	105.1"
E2249	60	15	E6253	16.25"	7 mm	11	407 .312"	1006 .281"	112.3"
E2251	59	15	E6253	16.25"	7 mm	11	407 .312"	1006 .281"	111.4"
E2253	63	16	E6253	16.25"	7 mm	11	407 .312"	1007 .312"	126.8"
E2255	64	14	E6263	18.63"	7 mm	13	407 .312"	1007 .312"	111.4"
E2257	68	16	E6263	18.63"	7 mm	13	407 .312"	1007 .312"	126.8"
E2271	76	16	E6266	21.00"	7 mm	15	407 .312"	1007 .312"	126.8"
E2273	87	18	E6266	21.00"	7 mm	15	407 .312"	1007 .312"	142.2"
				Pewag 240	00 Singles				
E2433	33	8	E6256	14.75"	7 mm	9	407 .312"	1006 .281"	61.6"
E2435	35	9	E6256	14.75"	7 mm	9	407 .312"	1006 .281"	68.9"
E2437	37	10	E6256	14.75"	7 mm	9	407 .312"	1006 .281"	76.1"
E2439	43	10	E6260	16.25"	7 mm	11	407 .312"	1006 .281"	76.1"
E2441	66	11	E6434	17.63"	8.2 mm	11	409 .375"	1007 .312"	88.4"
E2445	71	12	E6434	17.63"	8.2 mm	11	409 .375"	1007 .312"	96.1"
E2448	81	13	E6434	17.63"	8.2 mm	11	409 .375"	1007 .312"	103.7"
E2452	83	14	E6434	17.63"	8.2 mm	11	409 .375"	1007 .312"	111.4"
E2486	90	14	E6438	20.50"	8.2 mm	13	409 .375"	1007 .312"	111.4"
				Pewag 320	00 Singles				
E3210	29	13	E6225	15.00"	5.6 mm	13	406 .281"	1004 .219"	75.1"
E3227	39	10	E6253	16.25"	7 mm	11	407 .312"	1006 .281"	76.1"
E3229	44	10	E6259	18.63"	7 mm	13	407 .312"	1006 .281"	76.1"
E3231	48	11	E6259	18.63"	7 mm	13	407 .312"	1006 .281"	83.4"
E3235	50	12	E6259	18.63"	7 mm	13	407 .312"	1006 .281"	90.6"
E3237	42	9	E6265	23.50"	7 mm	17	407 .312"	1006 .281"	68.9"
E3249	43	9	E6267	23.50"	7 mm	17	407 .312"	1006 .281"	68.9"
E3251	48	10	E6267	23.50"	7 mm	17	407 .312"	1006 .281"	76.1"
E3255	73	14	E7213	21.00"	7 mm	15	407 .312"	1006 .281"	105.1"
E3257	78	15	E7213	21.00"	7 mm	15	407 .312"	1006 .281"	112.3"
E3259	60	11	E7214	23.50"	7 mm	17	407 .312"	1006 .281"	83.4"
E3261	76	16	E7214	23.50"	7 mm	17	407 .312"	1006 .281"	119.6"
E3265	59	11	E7214	23.50"	7 mm	17	407 .312"	1006 .281"	83.4"
E3267	60	12	E7214	23.50"	7 mm	17	407 .312"	1006 .281"	90.6"
E3269	63	13	E7214	23.50"	7 mm	17	407 .312"	1006 .281"	97.8"
E3271	68	14	E7214	23.50"	7 mm	17	407 .312"	1006 .281"	105.1"
E3273	79	12	E7216	32.50"	7 mm	25	407 .312"	1006 .281"	90.6"
E3275	86	13	E7216	32.50"	7 mm	25	407 .312"	1006 .281"	97.8"
E3277	92	14	E7216	32.50"	7 mm	25	407 .312"	1006 .281"	105.1"



	Weight Per	Cross Chain	Cross Chain	Cross Chain	Cross Chain	Links Per	Cross Ch	nain Hook	Side	Chain	Side Chain
Stock No.	Pair	Per 1/2 Pair	Stock Number		Wire Diameter		Stock N			lo./ Dia	
	Pall	Pel 1/2 Pall	SIOCK MUITIDEI	Pewag 42			SIUCK	10.7 Dia	SIUCK	NU.7 DIA	Length
E4211	42	26	E6219	13.25"	5.6 mm	11	406	.281"	1004	.219"	75.1"
E4214	57	30	E6221	13.25"	5.6 mm	11	406	.281"	1004	.219"	86.2"
E4216	44	24	E6221	13.25"	5.6 mm	11	406	.281"	1004	.219"	69.5"
E4219	50	26	E6221	13.25"	5.6 mm	11	406	.281"	1004	.219"	75.1"
E4221	54	28	E6221	13.25"	5.6 mm	11	406	.281"	1004	.219"	80.6"
E4228	56	28	E6225	15.00"	5.6 mm	13	406	.281"	1004	.219"	80.6"
E4229	47	24	E6225	15.00"	5.6 mm	13	406	.281"	1004	.219"	69.5"
E4233	73	22	E6251	14.75"	7 mm	9		.312"	1006	.281"	83.4"
E4237	78	24	E6251	14.75"	7 mm	9		.312"	1006	.281"	90.6"
E4238	88	24	E6253	16.25"	7 mm	11		.312"	1006	.281"	90.6"
E4239	86	26	E6251	14.75"	7 mm	9		.312"	1006	.281"	97.8"
E4241	92	28	E6251	14.75"	7 mm	9		.312"	1006	.281"	105.1"
E4245	98	30	E6251	14.75"	7 mm	9		.312"	1006	.281"	112.3"
E4247	104	28	E6253	16.25"	7 mm	11		.312"	1006	.281"	112.2"
E4249	110	30	E6253	16.25"	7 mm	11	407	.312"	1006	.281"	112.3"
E4251	110	30	E6253	16.25"	7 mm	11	407	.375"	1006	.281"	111.4"
E4253	112	32	E6253	16.25"	7 mm	11		.375"	1007	.312"	126.8"
E4255	118	28	E6263	18.63"	7 mm	13		.375"	1007	.312"	111.4"
E4257	126	32	E6263	18.63"	7 mm	13	407	.375"	1007	.312"	126.8"
E4271	154	32	E6266	21.00"	7 mm	15	407	.375"	1007	.312"	126.8"
E4273	171	36	E6266	21.00"	7 mm	15		.375"	1007	.312"	142.2"
				Pewag 44							
E4412	72	20	E6256	14.75"	7 mm	9	407	.312"	1006	.281"	61.6"
E4435	118	22	E6256	14.75"	7 mm	9	407	.312"	1006	.281"	68.9"
E4437	124	24	E6434	17.63"	8.2 mm	11	409	.375"	1007	.312"	76.1"
E4448	124	26	E6434	17.63"	8.2 mm	11	409	.375"	1007	.312"	105.6"
E4461	124	28	E6434	17.63"	8.2 mm	11	409	.375"	1007	.312"	115.2"
E4486	183	28	E6438	20.50"	8.2 mm	13	409	.375"	1007	.312"	115.2"
				Pewag 2	600 OTR						
E2612	97	14	E6630	25.50"	8.2 mm	17	409	.375"	1007	.312"	111.4"
E2615	114	16	E6630	25.50"	8.2 mm	17	409	.375"	1007	.312"	126.8"
E2624	150	13	E6640	28.00"	10 mm	17	411	.433"	1009	.375"	117.3"
E2627	170	15	E6640	28.00"	10 mm	17		.433"	1009	.375"	134.7"
E2633	182	14	E6650	33.75"	10 mm	21	411	.433"	1009	.375"	126.0"
E2636	188	15	E6650	33.75"	10 mm	21	411	.433"	1009	.375"	134.7"
E2642	232	18	E6650	33.75"	10 mm	21	411	.433"	1009	.375"	160.7"
E2645	268	15	E6660	38.50"	12 mm	19		.433"	1011	.437"	139.5"
E2648	298	16	E6660	38.50"	12 mm	19		.433"	1011	.437"	148.5"
E2657	346	17	E6670	45.25"	12 mm	23		.433"	1011	.437"	157.5"
E2672	403	17	E6680	52.38"	12 mm	27		.433"	1011	.437"	157.5"
E2675	427	18	E6680	52.38"	12 mm	27	411	.433"	1011	.437"	166.5"
				SSE Skid Stee							
SSE10165-2	78	17	E6263	18.22"	8.2 mm	11		.375"	1007		72"
SSE10165-4	44	9	E6263	18.22"	8.2 mm	11		.375"	1007		72"
SSE12165-2	88	19	E6445	20.90"	8.2 mm	13		.375"	1007		79"
SSE12165-4	69	10	E6445	20.90"	8.2 mm	13		.375"	1007		79"
SSE14175-2	120	23	E6445	20.90"	8.2 mm	13	409	.375"		.312"	94"
SSE14175-4	76	12	E6445	20.90"	8.2 mm	13	409	.375"	1007	.312"	94"

Pewag will custom build chains to suit your needs for any tire size and application. All of our made to order chains are built to the highest quality Pewag standards. Call our office today and order your custom Pewag chains.



Stock No.	Weight Per	Cross Chain	Cross Chain	Cross Chain	Cross Chain	Links Per	Cross Chain	Side Chain	Side Chain
	Pair	Per 1/2 Pair	Stock Number			Cross Chain	Hook Stock No.	Stock No./	Length
				Pewag 08					
E0822	79	11	E6434	17.63"	8.2 mm	11	409 .375"	1007 .312"	88.4"
E0829	76	9	E6434	17.63"	8.2 mm	11	409 .375"	1007 .312"	73.0"
E0831	72	10	E6445	20.50"	8.2 mm	13	409 .375"	1007 .312"	80.7"
E0832	79	12	E6434	17.63"	8.2 mm	11	409 .375"	1007 .312"	96.1"
E0834	78	11	E6445	20.50"	8.2 mm	13	409 .375"	1007 .312"	88.4"
E0836	88	12	E6445	20.50"	8.2 mm	13	409 .375"	1007 .312"	96.1"
E0838	109	14	E6445	20.50"	8.2 mm	13	409 .375"	1007 .312"	111.4"
E0846	126	17	E6445	20.50"	8.2 mm	13	409 .375"	1007 .312"	134.5"
E0850	86	10	E7420	22.75"	8.2 mm	15	409 .375"	1007 .312"	80.7"
E0852	105	13	E6445	20.50"	8.2 mm	13	409 .375"	1007 .312"	103.7"
E0856	111	15	E6445	20.50"	8.2 mm	13	409 .375"	1007 .312"	119.1"
E0858	122	14	E7420	22.75"	8.2 mm	15	409 .375"	1007 .312"	111.4"
E0859	124	15	E7420	22.75"	8.2 mm	15	409 .375"	1007 .312"	119.1"
E0862	145	18	E6445	20.50"	8.2 mm	13	409 .375"	1007 .312"	142.2"
E0866	153	19	E7420	22.75"	8.2 mm	15	409 .375"	1007 .312"	149.8"
E0869	137	16	E7420	22.75"	8.2 mm	15	409 .375"	1007 .312"	126.8"
E0871	163	20	E7420	22.75"	8.2 mm	15	409 .375"	1007 .312"	157.5"
E0874	137	15	E7426	28.38"	8.2 mm	19	409 .375"	1007 .312"	119.1"
E0876	158	16	E7426	28.38"	8.2 mm	19	409 .375"	1007 .312"	126.8"
E0877	164	17	E7426	28.38"	8.2 mm	19	409 .375"	1007 .312"	134.5"
E0879	171	18	E7426	28.38"	8.2 mm	19	409 .375"	1007 .312"	142.2"
E0881	205	10	E9562	30.75"	10 mm	19	411 .437"	1009 .375"	92.2"
E0882	244	12	E9562	30.75"	10 mm	19	411 .437"	1009 .375"	108.6"
E0883	268	13	E9562	30.75"	10 mm	19	411 .437"	1009 .375"	117.3"
E0884	283	14	E9562	30.75"	10 mm	19	411 .437"	1009 .375"	126.0"
E0885	319	15	E9562	30.75"	10 mm	19	411 .437"	1009 .375"	134.7"
E0887	324	16	E9562	30.75"	10 mm	19	411 .437"	1009 .375"	143.4"
E0889	364	17	E9562	30.75"	10 mm	19	411 .437"	1009 .375"	152.0"
E0890	438	17	E6650	33.75"	10 mm	21	411 .437"	1009 .375"	152.0"
E0891	338	14	E9567	39.13"	10 mm	25	411 .437"	1009 .375"	126.0"
E0892	385	18	E6650	33.75"	10 mm	21	411 .437"	1009 .375"	160.7"
E0893	384	16	E9567	39.13"	10 mm	25	411 .437"	1009 .375"	143.4"
E0894	370	19	E9562	30.75"	10 mm	19	411 .437"	1009 .375"	169.4"
E0895	523	17	E9567	39.13"	10 mm	25	411 .437"	1009 .375"	152.0"





	Weight	Cross Chain	Cross Chain	Cross Chain	Cross Chain	Links Per (Cross Chain Hook	Side Chain	Side Chain
Stock No.	Per Pair	Per 1/2 Pair		Lenath w/Hooks				Stock No./ Dia	Lenath
				Glacier Pass	enger Cable	S			Ŭ
1014	4.2	10	N/A	10.50"					56.25"
1018	4.7	11	N/A	10.50"					61.0"
1022	5.1	12	N/A	10.50"					66.0"
1026	5.0	11	N/A	11.40"					61.0"
1030	5.3	12	N/A	11.40"					66.0"
1034	5.6	12	N/A	12.75"					66.0"
1038	6.2	13	N/A	12.75"					71.0"
1042	6.7	13	N/A	13.75"					71.0"
1046	7.2	14	N/A	13.75"					76.0"
	<u> </u>			cier Passeng		ibles			(0.5"
1914	6.6	13	PRC 242V	11.25"	0.349				60.5"
1918	7.0	13	PRC 267V	12.00"	0.349				62.0"
1922	8.0	13	PRC 293V	12.85"	0.349				60.8"
1926	7.8	13	PRC 317V	13.75"	0.349				62.0"
1930	8.4	13	PRC 343V	14.75"	0.349				62.25"
1934	8.6	13	PRC 343V	14.75"	0.349				65.75"
1938	8.8	13	PRC 370V	15.80"	0.349				65.75"
1942	9.0	13	PRC 370V	16.20"	0.349				70.25"
1946	9.0	13	PRC 395V	16.80"	0.349				70.2"
1948	9.8	13	PRC 425V	17.80"	0.349				70.2"
				Glacier LT					
2009	9.0	11	8821	12.50"	0.486				69.0"
2011	10.5	13	8821	12.50"	0.486				79.0"
2014	12.5	15	8821	12.50"	0.486				90.0"
2016	10.3	12	8821	12.50"	0.486				74.0"
2019	11.5	13	8821	12.50"	0.486				79.0"
2021	11.8	14	8821	12.50"	0.486				85.0"
2028	13.2	14	8825	14.30"	0.486				85.0"
2029	11.5	12	8825	14.30"	0.486				74.25"
2033	15.8	13	8851	14.75"	0.585				89.0"
2037	17.0	14	8851	15.25"	0.585				95.0"
2039	18.4	15	8851	15.25"	0.585				101.5"
2041	17.5	16	8851	15.25"	0.585				107.0"
2045	20.9	16	8853	16.25"	0.585				107.0"
2049	21.9	17	8853	16.25"	0.585				113.0"
			(Glacier LT/HT \	/-TRAC Cabl	es			
2114	12.2	12	LTRC 445V	18.80"	0.425				80.0"
2115	10.4	12	N/A	15.00"	0.425				72.0"
2117	10.2	12	N/A	14.75"	0.425				78.0"
2119	11.3	12	LTRC 395V	16.75"	0.425				71.3"
2121	11.5	12	LTRC 420V	17.80"	0.425				74.8"
2127	12.2	12	LTRC 445V	18.75"	0.425				76.25"
2129	11.3	12	LTRC 395V	16.75"	0.425				74.5"
2145	28.6	14	HTRC 470V	20.25"	0.595				96.25"
2149	31.7	14	HTRC 555V	23.60"	0.595				96.25"
2155	32.2	14	HTRC 555V	23.60"	0.595				96.25"
			Gla	acier LT/HT W	ide Base Ca	bles			
3010	12.6	13	8825	14.30"	0.486				79.0"
3027	14.5	11	N/A	16.50"	0.585				76.25"
3029	17.2	11	N/A	18.50"	0.585				76.25"
3061	24.9	18	N/A	23.50"	0.585				117.5"
3069	28.9	15	N/A	25.00"	0.585				100.0"
	31.5	16	N/A	25.30"	0.585				106.0"



[]	Mainht	Croce Chain	Cross Chain	Cross Chair	Cress	Chain		Cross C		Cido	hain	Side Chair
Stock No.	Weight	Cross Chain	Cross Chain	Cross Chain	Cross				hain Hook	Side (Side Chain
	Per Pair	Per 1/2 Pair	Stock Number Glacie	r HT V-TRAC			Cross Chain Cables	STOCK	No./ Dia	SIOCK IV	10.7 DIA	Length
3161	37.6	14	HTRC 740V	30.75"	0.5							97.0"
3171	35.8	14	HTRC 675V	27.50"	0.5							101.5"
				Glacier HT I	Dual Ca	bles						
4039	27.7	30	8851	15.25"	0.5							102.0"
4041	29.5	32	8851	15.25"	0.5							108.0"
4045	40.2	32	8853	16.25"	0.5							108.0"
4049	33.5	34	8853	16.25"	0.5							114.0"
PL 1110	7.7	9	H5414	Glacier PL 10.38"	1/0		7	404	.177"	1000	.162"	47.5"
PL 1114	9.5	10	H5414	10.38"		.177	7		.177"		.162"	47.5 52.5"
PL 1118	9.9	11	H5414	10.38"		.177	7		.177"		.162"	57.5"
PL 1122	10.4	12	H5414	10.38"		.177	7		.177"		.162"	62.5"
PL 1126	10.5	11	H5419	11.56"		.177	8	404	.177"	1000	.162"	57.5"
PL 1130	11.3	12	H5419	11.56"		.177	8		.177"		.162"	62.5"
PL 1134	12.1	12	H5420	12.74"		.177	9	404	.177"	1000	.162"	62.5"
PL 1138	12.8	13	H5420	12.74"		.177	9	404	.177"	1000	.162"	67.5"
PL 1142	13.4	13	H5422	13.92"		.177	10	404	.177"	1000	.162"	67.5"
PL 1144	14.2	14	H5422	13.92"		.177	10	404	.177"		.162"	72.5"
PL 1146	15.3	15	H5422	13.92"		.177	10	404	.177"	1000	.162"	77.5"
	0.1			Glacier PL S			45		4770	4000	4.(0)	
PLC 1110	9.1	9	H5414SL	10.38"	3.7		15	404	.177"	1000	.162"	47.5"
PLC 1114	9.9	10	H5414SL	10.38"	3.7		15		.177"		.162"	52.5"
PLC 1118 PLC 1122	10.8 11.9	11 12	H5414SL H5414SL	10.38" 10.38"	3.7 3.7		15 15		.177" .177"		.162" .162"	57.5" 62.5"
PLC 1122 PLC 1126	11.9	12	H5414SL H5419SL	10.38	4.5		15	404	.177"	1000	. 162"	62.5 57.5"
PLC 1130	12.5	12	H5419SL	11.25"	4.5		13		.177"		.162"	62.5"
PLC 1134	13.3	12	H5420SL	12.74"	4.5		15	404	.177"		.162"	62.5"
PLC 1138	14.1	13	H5420SL	12.74"	4.5		15		.177"		.162"	67.5"
PLC 1142	15.1	13	H5422SL	14.50"	4.5		17	404	.177"	1000	.162"	67.5"
PLC 1144	15.9	14	H5422SL	14.50''	4.5	mm	17	404	.177"	1000	.162"	72.5"
PLC 1146	17.2	15	H5422SL	14.50"	4.5		17	404	.177"	1000	.162"	77.5"
			Glac	ier 2200 / <mark>28</mark> :			_					
H2209 / H2809	20	11	H6219 / <mark>H6819</mark>	12.12"		.234	9	405	.250"	1004	.219"	63.9"
H2211 / H2811	24	13	H6219 / H6819	12.12"		.234	9	405	.250"	1004	.219"	75.1"
H2214 / H2814	28	15	H6221 / H6821	13.12"	4/0	.234	10	405	.250"	1004	.219"	86.2"
H2216 / H2816	23	12	H6221 / H6821	13.12"		.234	10	405	.250"	1004	.219"	69.5" 75.1"
H2219 / H2819	25 26	13 14	H6221 / H6821	13.12" 13.12"		.234 .234	10 10	405 405	.250" .250"	1004 1004	.219" .219"	75.1" 80.6"
H2221 / H2821 H2226	33	14	H6221 / H6821 H6229	17.12"		.234	10		.250"		.219	86.2"
H2228 / H2828	29	15	H6225 / H6825	15.12"	4/0	.234	14	405	.250"	1004	.219	80.6"
H2229 / H2829		12	H6225 / H6825	15.12"		.234	12	405	.250"	1004	.219"	69.5"
H2233 / H2833		11	H6251 / H6851	14.37"		.281	9	407	.312"		.281"	83.4"
H2237 / H2837		12	H6251 / H6851	14.37"		.281	9		.312"	1006	.281"	90.6"
H2238 / H2838	45	12	H6253 / H6853	15.62"		.281	10		.312"	1006	.281"	93.3"
H2239 / H2839	46	13	H6251 / H6851	14.37"	6/0	.281	9	407	.312"	1006	.281"	97.8"
H2241 / <mark>H2841</mark>	51	14	H6251 / <mark>H6851</mark>	14.37"	6/0	.281	9	407	.312"	1006	.281"	105.1"
H2245 / H2845	52	15	H6251 / <mark>H6851</mark>	14.37"		.281	9		.312"	1006	.281"	112.3"
H2247 / <mark>H2847</mark>	51	14	H6253 / <mark>H6853</mark>	15.62"	6/0	.281	10		.312"	1006	.281"	105.1"
H2249 / H2849	56	15	H6253 / H6853	15.62"		.281	10	407	.312"	1006	.281"	112.3"
H2251 / H2851	64	14	H6260 / H6860	16.01"		.312	9	409	.375"		.312"	111.4"
H2253 / H2853	80	16	H6260 / H6860	16.01"		.312	9	409	.375"		.312"	126.8"
H2255 / H2855	68	14	H6263 / H6863	17.40"		.312	10		.375" .375"		.312" .312"	111.4" 126.0"
H2257 / <mark>H2857</mark> H2271	79 82	16 16	H6263 / <mark>H6863</mark> H6266	17.40" 18.79"		.312 .312	10 11	409 409	.375	1007 1007	.312 .312"	126.8" 126.8"
H2273	82 91	18	H 6266	18.79		.312	11		.375		.312	120.8
112213	71	10	110200	10.77	110	JIZ	11	407	.313	1007	.512	142.2



Stock No.	Weight	Cross Chain	Cross Chain	Cross Chain	Cross	Chain	Links Per	Cross C	hain Hook	Side	Chain	Side Chain
Slock No.	Per Pair	Per 1/2 Pair	Stock Number	Length w/Hooks			Cross Chain	Stock I	No./ Dia	Stock N	lo./ Dia	Length
110.400	24	0		Glacier 240			0	400	075	100/	2011	(1 / 1
H2433	34	8	H6256	14.62"		.312	8	409	.375"	1006	.281"	61.6"
H2435 H2437	39 41	9 10	H 6256 H 6256	14.62" 14.62"		.312 .312	8	409 409	.375" .375"	1006 1006	.281" .281"	68.9" 76.1"
						.312	-		.375			
H2439 H2441	43 66	10 11	H 6260 H 6434	16.01" 17.42"	7/0 9/0		9	409 409	.375	1006 1007	.281" .312"	76.1" 88.4"
					9/0 9/0				.375			
H2445 H2448	70 77	12 13	H 6434 H 6434	17.42" 17.42"	9/0 9/0		11 11	409 409	.375	1007 1007	.312" .312"	96.1" 103.7"
H2446 H2452	83	13	H 6434	17.42	9/0 9/0		11	409	.375"	1007	.312	103.7 111.4"
H2486	92	14	H6438	19.50	9/0 9/0		13	409	.375"	1007	.312	111.4"
112400	72	14		er 3200 / 380				409	.375	1007	.312	111.4
H3210/H3810	26	13	H6225 / H6825	15.12"		.234	12	405	.250"	1004	.219"	75.1"
H3227 / H3827	36	10	H6253 / H6853	15.62"		.281	10	407	.312"	1006	.281"	76.1"
H3229 / H3829	38	10	H6259 / H6859	18.12"	6/0	.281	12	407	.312"	1006	.281"	76.1"
H3231	44	11	H6259	18.12"	6/0	.281	12	407	.312"	1006	.281"	83.4"
H3235	48	12	H6259	18.12"	6/0	.281	12		.312"	1006	.281"	90.6"
H3237	41	9	H6265	23.12"	6/0	.281	16	407	.312"	1006	.281"	68.9"
H3249	43	9	H6267	24.37"	6/0	.281	17	407	.312"	1006	.281"	68.9"
H3251	48	10	H6267	24.37"	6/0	.281	17		.312"	1006	.281"	76.1"
H3255 / H3855	72	14	H7213 / H7813	21.57"		.312	13	409	.375"	1006	.281"	105.1"
H3257	76	15	H7213	21.57"		.312	13	409	.375"	1006	.281"	112.3"
H3259	60	11	H7214	22.96"	7/0	.312	14	409	.375"	1006	.281"	83.4"
H3261	88	16	H7214	22.96"		.312	14	409	.375"	1006	.281"	119.6"
H3265	61	11	H7215	24.35"		.312	15	409	.375"	1006	.281"	83.4"
H3267	67	12	H7215	24.35"		.312	15	409	.375"	1006	.281"	90.6"
H3269	71	13	H7215	24.35"	7/0	.312	15	409	.375"	1006	.281"	97.8"
H3271 / H3871	78	14	H7215 / H7815	24.35"	7/0	.312	15	409	.375"	1006	.281"	105.1"
H3273	79	12	H7216	31.30"		.312	20	409	.375"	1006	.281"	90.6"
H3275	81	13	H7216	31.30"		.312	20	409	.375"	1006	.281"	97.8"
H3277	90	14	H7216	31.30"		.312	20	409	.375"	1006	.281"	105.1"
			Gla	cier 4200 / 48	300 V-E	Bar D i	uals					
H4211 / H4811	46	26	H6219 / <mark>H6819</mark>	12.12"	4/0	.234	9	405	.250"	1004	.219"	75.1"
H4214 / H4814	54	30	H6221 / <mark>H6821</mark>	13.12"	4/0	.234	10	405	.250"	1004	.219"	86.2"
H4216 / H4816	42	24	H6221 / <mark>H6821</mark>	13.12"	4/0	.234	10	405	.250"	1004	.219"	69.5"
H4219 / H4819	44	26	H6221 / <mark>H6821</mark>	13.12"	4/0	.234	10	405	.250"	1004	.219"	75.1"
H4221 / H4821	49	28	H6221 / <mark>H6821</mark>	13.12"	4/0	.234	10	405	.250"	1004	.219"	80.6"
H4228 / H4828	52	28	H6225 / H6825	15.12"		.234	12	405	.250"	1004	.219"	80.6"
H4229 / H4829	46	24	H6225 / H6825	17.12"		.234	12		.250"	1004	.219"	69.5"
H4233 / H4833	72	22	H6251 / <mark>H6851</mark>	14.37"		.281	9		.312"	1006	.281"	83.4"
H4237 / H4837	76	24	H6251 / <mark>H6851</mark>	14.37"		.281	9		.312"	1006	.281"	90.6"
H4238 / H4838	88	24	H6253 / H6853	15.62"		.281	10		.312"	1006	.281"	90.6"
H4239 / H4839	82	26	H6251 / <mark>H6851</mark>	14.37"	6/0	.281	9		.312"	1006	.281"	97.8"
H4241 / H4841	88	28	H6251 / H6851	14.37"		.281	9		.312"	1006	.281"	105.1"
H4245 / H4845	94	30	H6251 / <mark>H6851</mark>	14.37"		.281	9		.312"	1006	.281"	112.3"
H4247 / H4847	94	28	H6253 / H6853	15.62"		.281	10		.312"	1006	.281"	105.1"
H4249 / H4849	101	30	H6253 / H6853	15.62"		.281	10	407	.312"	1006	.281"	112.3"
H4251 / H4851	120	28	H6260 / H6860	16.01"		.312	9		.375"	1007	.312"	111.4"
H4253 / H4853	140	32	H6260 / H6860	16.01"		.312	9		.375"	1007	.312"	126.8"
H4255 / H4855	133	28	H6263 / H6863	17.40"		.312	10		.375"	1007	.312"	111.4"
H4257	137	32	H6263	17.40"		.312	10	409	.375"	1007	.312"	126.8"
H4271	142	32	H6266	18.79"		.312	11		.375"		.312"	126.8"
H4273	160	36	H6266	18.79"	7/0	.312	11	409	.375"	1007	.312	142.2"

Pewag will custom build chains to suit your needs for any tire size and application. All of our made to order chains are built to the highest quality Pewag standards. Call our office today and order your custom Pewag chains.



Stock No. Per Part Per 1/2 Part Stock Nov/ Dia Stock Nov/ Dia	r	144.1.1.1		0 0				0 01 1 1		
Heat 2 Part 2 Heat 2 Heat 3 Part 3<	Stock No.	Weight	Cross Chain	Cross Chain	Cross Chain	Cross Chain	Links Per			Side Chain
H4412 74 20 H6256 14 40" 700 317 106 217 64.9 H4437 112 24 H6434 17.42" 90 375 11 409 375 1007 312" 64.9 H4448 144 26 H6434 17.42" 90 375 11 409 375 1007 312" 64.7 H4461 154 28 H6434 17.42" 90 375 1107 317 1007 312" 111.4 H4465 128 H66434 17.42" 90 375 1007 312" 111.4 H2612/2915 130 16 H6600 14.00" 110.437" 15 411 433 1009 375" 130.7 126.8' H2612/2915 130 16600 14.00" 110.437" 19 411 433 1009 375" 130.7' 130.7' 130.7' 130.7' 130.7' 130.7' 130.		Per Pair	Per 1/2 Pair	Stock Number			Cross Chain	Stock No./ Dia	Stock No./ Dia	Length
H4435 118 22 H6434 17.4/2 90.375 11 409.375 1007.312 68.97 H4448 144 26 H6434 17.4/2 90.375 11 409.375 1007.312 103.7 H4461 154 28 H6434 17.4/2 90.375 13 409.375 1007.312 111.4' H4468 168 28 H6434 17.4/2 90.375 13 409.375 1007.312 111.4' H2612/2912 109 14 H6601 23.00' 90.375 17 410.405' 1007.312' 111.4' H2624/2924 156 114 H6600 23.00' 90.375 17 410.405' 1007.312' 113.4' H2624/2924 156 116.433' 110.437' 19 411.433' 1009.375' 13.4' 113.4' H2624 247 18 H6660 39.3' 140.53'' 20 413.5'12'' 111.4''''''''''''''''''''''''''''''''''	H4412	74	20	H6256			8	409 375"	1006 281"	61.6"
H44437 132 24 H644 17.42 90.375 11 409 375' 1007 312' 76,10' H44481 154 28 H6434 17.47' 90.375 11 409 375' 1007' 312' 111.4' H4486 168 28 H6438 19.6'' 90.375 13 409 375' 1007' 312'' 111.4'' H2612/2912 10 H6430 H690'' 28.00'' 90.375'' 17 410 400''' 100'''' 312''' 112''' H2612/2915 130 16640''' 28.00'''''''' 90'''''' 375''''''''''''''''''''''''''''''''''''										
H4448 144 26 H643 17.42 90 375 11 409 375 1007 312 103.7 H4486 168 28 H6438 17.42 90 375 13 409 375 1007 312 111.4 H2612/2912 109 14 H6630/H670 25.07 90 375 17 410 405 1007 312 111.4 H2624/2924 156 13 H6630/H670 25.07 90 375 110 437 100 375 13.7 H2624/2924 156 15 H6640 34.47 110 437 199 411 433 1009 375 13.47 H2634 344 15 H6660 34.47 110 437 109 31.47 H48 140 517 141 433 1009 375 13.47 H2645 344 15 1104 517 141 3512										
H4461 154 28 H6438 19.27 90 375 11 409 375 1007 312 111.4 H42612 19 14 H6438 19.90 375 10 409 375 1007 312 111.4 H2612 22912 130 16 16530 110 375 17 410 406 1007 312 112 128 H2612 22915 130 1166401 1100 327 15 411 433 1009 375 113 116 116500 110 437 19 411 433 1009 375 134.07 H2632 207 15 H6600 34.407 110 437 194 411 433 1009 375 140 512 1011 437 1352 1011 437 1352 1011 437 1352 1011 437 1352 1011 437 1352 1011 <td></td>										
H4486 168 28 H448 19.57 90.375 13 409 375 1007 3127 111.4* H2612/2912 19 14 H6630/H6730 25.007 90.375 17 410 405* 1007 3127 11.4* H2612/2914 186 13 H6630/H670 25.007 90.375 17 410 405* 1007 3127 126.8* H2624/2924 186 13 H6630/H640 28.07 110 437 19 411 433 1009 375* 184.7* H2636 207 15 H6650 34.40* 110 437 190 411 433* 1009 375* 184.7* H2645 354 15 H6660 39.30* 140 531* 20 413 512* 1011 437* 155* H2645 140 1630 22.5 140 531* 27 413 512* 1011 437* <										
Celector 2:000 V-Ber OTR H2812 / 2915 130 16 H6600 / H6930 25.00" 90 375 17 410 406 1007 312 12.68" H2812 / 2915 130 16 H6600 / H6930 25.00" 90 375 17 410 406 1007 312 12.68" H2627 180 15 H6640 28.20" 110 437 15 411 433 1009 375 134.7" H2633 192 14 H6650 34.40" 110 437 19 411 433 1009 375 134.7" H2642 247 18 H6650 34.40" 110 437 19 411 433' 1009 375' 134.7" H2642 247 18 H6650 34.0" 140 531' 20 413 512' 1011 437' 143'' 143'' 155'' H2647 490 17 H66										
$\begin{array}{c c c c c c c c c c c c c c c c c c c $										
	H2612 / 2912	109	14					410 .406"	1007 .312"	111.4"
$\begin{array}{c c c c c c c c c c c c c c c c c c c $		130	16			9/0.375	17	410 .406"	1007 .312"	126.8"
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$		156	13		28.20"	11/0 .437"	15	411 .433"	1009 .375"	117.3"
$\begin{array}{c c c c c c c c c c c c c c c c c c c $		180	15		28.20"	11/0 .437"	15	411 .433"	1009 .375"	134.7"
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	H2633	192	14	H6650	34.40"	11/0 .437"	19	411 .433"	1009 .375"	126.0"
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	H2636	207	15	H6650	34.40"	11/0 .437"	19	411 .433"	1009 .375"	134.7"
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	H2642	247	18	H6650	34.40"	11/0 .437"	19	411 .433"	1009 .375"	160.7"
$\begin{array}{c c c c c c c c c c c c c c c c c c c $										
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	H2648			H 6660	39.30"		20			148.5"
H2675 516 18 H6680 51.50° 14/0 531° 27 413 512° 1011 437° 166.5° Clacieir 2700 Stare Link OTR H2715 145 14 H6730 26.5° 8mm** 17 409 375° 1007 312° 114.6° H2715 145 14 H6730 25.50° 10mm** 17 411 433° 1009 375° 121.5° H2727 167 15 H6740 28.00° 10mm** 21 411 433° 1009 375° 128.7° H2736 195 15 H6750 33.75° 10mm** 21 411 433° 1009 375° 128.7° H2742 232 18 H6750 33.75° 10mm** 21 411 433° 1011 437° 147.7° H2742 232 18 H6750 33.75° 12mm** 21 411 433° 1011 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>1011 .437"</td><td></td></t<>									1011 .437"	
Glacier 2700 Suare Link OTR H2712 96 14 H6730 26.55" 8mm* 17 409 375" 1007 312" 114.6" H2715 145 14 H6730 25.50" 10mm* 15 411 433" 1009 375" 121.5" H2727 167 15 H6740 28.00" 10mm* 17 411 433" 1009 375" 138.9" H2733 177 14 H6750 33.75" 10mm* 21 411 433" 1009 375" 138.9" H2742 232 18 H6750 33.75" 10mm* 21 411 433" 1011 437" 147.7" H2745 300 15 H6760 39.25" 12mm* 19 411 433" 1011 437" 179.7" H2745 356 18 H6770 44.75" 12mm* 23 411 433" 1011 437" 170.	H2672	489								157.5"
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	H2675	516	18					413 .512"	1011 .437"	166.5"
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$										
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$										
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$										
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$										
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$						-				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$										
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$										
$\begin{array}{c c c c c c c c c c c c c c c c c c c $										
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$										
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$										
$\begin{array}{c c c c c c c c c c c c c c c c c c c $										
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$										
$\begin{array}{c c c c c c c c c c c c c c c c c c c $										
H2775 427 18 H6780 50.25" 12mm** 27 411 433" 1011 437" 170.7" Glacier 0800 Tractor H0821 68 8 H6266 15.79" 7/0 312 11 410 406" 1006 281" 88.4" H0822 75 11 H6434 17.36" 9/0 375 11 410 406" 1007 312" 88.4" H0829 72 9 H6434 17.36" 9/0 375 11 410 406" 1007 312" 88.4" H0832 75 12 H6434 17.36" 9/0 375 14 410 406" 1007 312" 80.7" H0834 74 11 H6445 21.14" 9/0 375 14 410 406" 1007 312" 88.4" H0836 84 12 H6445 21.14" 9/0 375 14										
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$										-
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	112773	427	10	110700			21	411 .433	1011 .437	170.7
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	H0821	68	8	H6266			11	410 406"	1006 281"	88.4"
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$										
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$										
H08327512H643417.36"9/0.37511410.406"1007.312"96.1"H08347411H644521.14"9/0.37514410.406"1007.312"88.4"H08368412H644521.14"9/0.37514410.406"1007.312"96.1"H083810414H644521.14"9/0.37514410.406"1007.312"111.4"H084612017H644521.14"9/0.37514410.406"1007.312"134.5"H08508210H742023.66"9/0.37516410.406"1007.312"80.7"H085210013H644521.14"9/0.37514410.406"1007.312"103.7"H085610515H644521.14"9/0.37514410.406"1007.312"103.7"H085811614H742023.66"9/0.37516410.406"1007.312"119.1"H085911815H742023.66"9/0.37516410.406"1007.312"119.1"H086213818H644521.14"9/0.37516410.406"1007.312"119.1"H086614519H742023.66"9/0										
H08347411H644521.14"9/0.37514410.406"1007.312"88.4"H08368412H644521.14"9/0.37514410.406"1007.312"96.1"H083810414H644521.14"9/0.37514410.406"1007.312"111.4"H084612017H644521.14"9/0.37514410.406"1007.312"134.5"H08508210H742023.66"9/0.37516410.406"1007.312"80.7"H085210013H644521.14"9/0.37514410.406"1007.312"103.7"H085610515H644521.14"9/0.37514410.406"1007.312"103.7"H085811614H742023.66"9/0.37514410.406"1007.312"119.1"H085811614H742023.66"9/0.37516410.406"1007.312"111.4"H085911815H742023.66"9/0.37516410.406"1007.312"119.1"H086213818H644521.14"9/0.37516410.406"1007.312"119.1"H086614519H742023.66"9/0.37516410.406"1007.312"142.2"H086614519H742023.66"9/0.37516410.406"1007.312"142.2"H086614519H742023.66" <td></td>										
H0836 84 12 H6445 21.14" 9/0 375 14 410 .406" 1007 .312" 96.1" H0838 104 14 H6445 21.14" 9/0 .375 14 410 .406" 1007 .312" 111.4" H0846 120 17 H6445 21.14" 9/0 .375 14 410 .406" 1007 .312" 134.5" H0850 82 10 H7420 23.66" 9/0 .375 16 410 .406" 1007 .312" 80.7" H0852 100 13 H6445 21.14" 9/0 .375 14 410 .406" 1007 .312" 80.7" H0856 105 15 H6445 21.14" 9/0 .375 14 410 .406" 1007 .312" 119.1" H0858 116 14 H7420 23.66" 9/0 .375 16 410 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<>										
H0838 104 14 H6445 21.14" 9/0 375 14 410 .406" 1007 .312" 111.4" H0846 120 17 H6445 21.14" 9/0 .375 14 410 .406" 1007 .312" 134.5" H0850 82 10 H7420 23.66" 9/0 .375 16 410 .406" 1007 .312" 80.7" H0852 100 13 H6445 21.14" 9/0 .375 14 410 .406" 1007 .312" 103.7" H0856 105 15 H6445 21.14" 9/0 .375 14 410 .406" 1007 .312" 103.7" H0858 116 14 H7420 23.66" 9/0 .375 16 410 .406" 1007 .312" 111.4" H0859 118 15 H7420 23.66" 9/0 .375 16 410										
H084612017H644521.14"9/0.37514410.406"1007.312"134.5"H08508210H742023.66"9/0.37516410.406"1007.312"80.7"H085210013H644521.14"9/0.37514410.406"1007.312"103.7"H085610515H644521.14"9/0.37514410.406"1007.312"119.1"H085811614H742023.66"9/0.37516410.406"1007.312"111.4"H085911815H742023.66"9/0.37516410.406"1007.312"119.1"H086213818H644521.14"9/0.37516410.406"1007.312"142.2"H086614519H742023.66"9/0.37516410.406"1007.312"142.2"H086913016H742023.66"9/0.37516410.406"1007.312"148.8"H086913016H742023.66"9/0.37516410.406"1007.312"148.8"H086913016H742023.66"9/0.37516410.406"1007.312"148.8"H087115520H742023.66"<										
H08508210H742023.66"9/0.37516410.406"1007.312"80.7"H085210013H644521.14"9/0.37514410.406"1007.312"103.7"H085610515H644521.14"9/0.37514410.406"1007.312"119.1"H085811614H742023.66"9/0.37516410.406"1007.312"111.4"H085911815H742023.66"9/0.37516410.406"1007.312"119.1"H086213818H644521.14"9/0.37514410.406"1007.312"142.2"H086614519H742023.66"9/0.37516410.406"1007.312"142.2"H086913016H742023.66"9/0.37516410.406"1007.312"149.8"H086913016H742023.66"9/0.37516410.406"1007.312"126.8"H087115520H742023.66"9/0.37516410.406"1007.312"126.8"										
H0852 100 13 H6445 21.14" 9/0 375 14 410 .406" 1007 .312" 103.7" H0856 105 15 H6445 21.14" 9/0 .375 14 410 .406" 1007 .312" 119.1" H0858 116 14 H7420 23.66" 9/0 .375 16 410 .406" 1007 .312" 111.4" H0859 118 15 H7420 23.66" 9/0 .375 16 410 .406" 1007 .312" 111.4" H0859 118 15 H7420 23.66" 9/0 .375 16 410 .406" 1007 .312" 119.1" H0862 138 18 H6445 21.14" 9/0 .375 14 410 .406" 1007 .312" 142.2" H0866 145 19 H7420 23.66" 9/0 .375 16 410										
H085610515H644521.14"9/0.37514410.406"1007.312"119.1"H085811614H742023.66"9/0.37516410.406"1007.312"111.4"H085911815H742023.66"9/0.37516410.406"1007.312"119.1"H086213818H644521.14"9/0.37514410.406"1007.312"142.2"H086614519H742023.66"9/0.37516410.406"1007.312"149.8"H086913016H742023.66"9/0.37516410.406"1007.312"126.8"H087115520H742023.66"9/0.37516410.406"1007.312"157.5"				H6445				410 .406"		103.7"
H085911815H742023.66"9/0.37516410.406"1007.312"119.1"H086213818H644521.14"9/0.37514410.406"1007.312"142.2"H086614519H742023.66"9/0.37516410.406"1007.312"149.8"H086913016H742023.66"9/0.37516410.406"1007.312"126.8"H087115520H742023.66"9/0.37516410.406"1007.312"157.5"										119.1"
H086213818H644521.14"9/0.37514410.406"1007.312"142.2"H086614519H742023.66"9/0.37516410.406"1007.312"149.8"H086913016H742023.66"9/0.37516410.406"1007.312"126.8"H087115520H742023.66"9/0.37516410.406"1007.312"157.5"	H0858	116	14	H7420	23.66"	9/0 .375	16	410 .406"	1007 .312"	111.4"
H0866 145 19 H7420 23.66" 9/0 .375 16 410 .406" 1007 .312" 149.8" H0869 130 16 H7420 23.66" 9/0 .375 16 410 .406" 1007 .312" 126.8" H0871 155 20 H7420 23.66" 9/0 .375 16 410 .406" 1007 .312" 126.8"	H0859	118	15	H7420	23.66"	9/0 .375	16		1007 .312"	119.1"
H0869 130 16 H7420 23.66" 9/0 .375 16 410 .406" 1007 .312" 126.8" H0871 155 20 H7420 23.66" 9/0 .375 16 410 .406" 1007 .312" 126.8"	H0862	138	18	H6445	21.14"	9/0 .375	14	410 .406"	1007 .312"	142.2"
H0871 155 20 H7420 23.66" 9/0 .375 16 410 .406" 1007 .312" 157.5"	H0866	145	19	H7420	23.66"	9/0 .375	16	410 .406"	1007 .312"	149.8"
	H0869	130	16	H7420	23.66"	9/0 .375	16	410 .406"	1007 .312"	126.8"
	H0871	155	20	H7420	23.66"	9/0 .375	16	410 .406"	1007 .312"	157.5"
H0874 130 15 H7426 27.44" 9/0 .375 19 410 .406" 1007 .312" 119.1"	H0874	130	15	H7426	27.44"	9/0 .375	19	410 .406"	1007 .312"	119.1"



Stock No.	Weight	Cross Chain	Cross Chain	Cross Chain	Cross Chain	Links Per	Cross C	hain Hook	Side (Chain	Side Chain
SIUCK INU.	Per Pair	Per 1/2 Pair	Stock Number	Length w/Hooks	Wire Diameter	Cross Chain	Stock	No./ Dia	Stock N	o./ Dia	Length
	•	•		Glacier 080		•					•
H0876	150	16	H7426	27.44"	9/0.375	19	410	.406"	1007	.312"	126.8"
H0877	156	17	H7426	27.44"	9/0.375	19	410	.406"	1007	.312"	134.5"
H0879	162	18	H7426	27.44"	9/0.375	19	410	.406"	1007	.312"	142.2"
H0880	180	20	H7426	27.44"	9/0.375	19	410	.406"	1007	.312"	157.5"
H0881	134	10	H9562	31.29"	11/0 .437	17	411	.437"	1009	.375"	92.2"
H0883	178	13	H9562	31.29"	11/0 .437	17	411	.437"	1009	.375"	117.3"
H0884	187	14	H9562	31.29"	11/0 .437	17	411	.437"	1009	.375"	126.0"
H0885	211	15	H9562	31.29"	11/0 .437	17	411	.437"	1009	.375"	134.7"
H0887	214	16	H9562	31.29"	11/0 .437	17	411	.437"	1009	.375"	143.4"
H0889	238	17	H9562	31.29"	11/0 .437	17	411	.437"	1009	.375"	152.0"
H0890	290	19	H6650	34.42"	11/0 .437	19	411	.437"	1009	.375"	152.0"
H0891	224	14	H9567	39.10"	11/0 .437	22	411	.437"	1009	.375"	126.0"
H0892	255	18	H6650	34.42"	11/0 .437	19	411	.437"	1009	.375"	160.7"
H0893	252	16	H9567	39.10"	11/0 .437	22	411	.437"	1009	.375"	143.4"
H0894	244	19	H9562	31.29"	11/0 .437	17	411	.437"	1009	.375"	169.4"
H0895	344	17	H9567	39.10"	11/0 .437	22	411	.437"	1009	.375"	152.0"
			Glacie	er 200 DUO Tr	actor Squar	e Link					
H214SL	97	8	292	18.85"	8 mm	13	410	.406"	1007T*	.312"	114.8"
H218SL	120	10	292	18.85"	8 mm	13	410	.406"	1007T*	.312"	142.5"
H224SL	131	11	292	18.85"	8 mm	13	410	.406"	1007T*	.312"	153.0"
H225SL	74	6	292	18.85"	8 mm	13	410	.406"	1007T*	.312"	91.4"
H227SL	154	13	292	18.85"	8 mm	13	410	.406"	1007T*	.312"	178.6"
H229SL	109	9	292	18.85"	8 mm	13	410	.406"	1007T*	.312"	129.7"
H232SL	143	12	292	18.85"	8 mm	13	410	.406"	1007T*	.312"	168.0"
H236SL	143	14	292	18.85"	8 mm	13	411	.406"	1007T*		166.0"
H242SL	140	11	294	21.22"	8 mm	15		.406"	1007T*		155.2"
H246SL	153	12	294	21.22"	8 mm	15	410	.406"	1007T*		168.0"
H247SL	165	13	294	21.22"	8 mm	15	410	.406"	1007T*	.312"	180.8"
H240SL	120	9	295	23.58"	8 mm	17	410	.406"	1007T*		127.6"
H250SL	135	10	295	23.58"	8 mm	17		.406"	1007T*		140.3"
H252SL	148	11	295	23.58"	8 mm	17		.406"			153.0"
H260SL	143	10	296	24.95"	8 mm	19	410	.406"	1007T*		140.3"
H254SL	171	12	296	24.95"	8 mm	19	410	.406"	1007T*	.312"	165.8"
H263SL	116	8	296	24.95"	8 mm	19	410	.406"	1007T*		117.0"
H262SL	144	10	296	24.95"	8 mm	19	410	.406"	1007T*		142.5"
H266SL	158	11	296	24.95"	8 mm	19	410	.406"	1007T*		155.3"
H270SL	169	12	296	24.95"	8 mm	19		.406"	1007T*		168.0"
H255SL	185	13	296	24.95"	8 mm	19		.406"	1007T*		180.7"
H256SL	199	14	296	24.95"	8 mm	19		.406"	1007T*		193.5"
H259SL	213	15	296	24.96"	8 mm	19		.406"	1007T*		206.2"
H264SL	113	7	298	30.67"	8 mm	23	410	.406"	1007T*		104.2"
H268SL	144	9	298	30.67"	8 mm	23		.406"	1007T*		128.5"
H271SL	165	10	298	30.67"	8 mm	23		.406"	1007T*		142.5"
H273SL	175	11	298	30.67"	8 mm	23		.406"	1007T*		155.3"
H272SL	190	12	298	30.67"	8 mm	23		.406"	1007T*		168.0"
H277SL	221	14	298	30.67"	8 mm	23		.406"	1007T*		193.6"
H275SL	162	8	299	35.39"	8 mm	27		.400"	1007T*		114.5"
H276SL	225	13	299	35.39"	8 mm	27		.406"	1007T*		178.6"

Pewag will custom build chains to suit your needs for any tire size and application. All of our made to order chains are built to the highest quality Pewag standards. Call our office today and order your custom Pewag chains.



	Weight	Cross Chain	Cross Chain	Cross Chain	Cross Chain	Links Per	Cross Chain Hook	Side Chain	Side Chain
Stock No.	Per Pair	Per 1/2 Pair	Stock Number					Stock No./ Dia	
			SIOCK IN UMDER		er ATV		SIOCK IN 0.7 DIA	SIOCK IN 0.7 DIA	Lengin
ATV610	26	15	H6821	13.12"	4/0V .324"	10	405 .250"	1004 .219"	50.04"
ATV611	29	17	H6821	13.12"	4/0V .324"	10	405 .250"	1004 .219"	55.60"
ATV612	33	19	H6821	13.12"	4/0V .324"	10	405 .250"	1004 .219"	61.16"
ATV615	28	13	H6823	16.12"	4/0V .324"	13	405 .250"	1004 .219"	44.48"
ATV618	39	19	H6823	16.12"	4/0V .324"	13	405 .250"	1004 .219"	61.16"
ATV620	37	15	H6827	20.12"	4/0V .324"	17	405 .250"	1004 .219"	50.04"
				Glacier Sma	II Equipment				
SE3301	3	9	N/A	5.48"	.146"	6	.155"	.118"	22.2"
SE3308	3	12	N/A	6.06"	.146"	7	.155"	.118"	27.8"
SE7106	3	10	N/A	6.06"	.146"	7	.155"	.118"	24.4"
SE3302	4	13	N/A	6.06"	.146"	7	.155"	.118"	31.1"
SE1301	11	13	N/A	8.76"	.207"	6	.207"	1001 .177"	37.5"
SE7129	6	11	N/A	7.26"	.177"	7	.207"	1001 .177"	33.0"
SE3300	12	13	N/A	10.18"	.207"	7	.207"	1001 .177"	38.8"
SE3303	16	15	N/A	10.18"	.207"	7	.207"	1001 .177"	46.7"
SE3312	14	14	N/A	11.52"	.207"	9	.207"	1002 .193"	44.1"
SE3305	16	13	N/A	14.78"	.207"	12	.207"	1002 .193"	37.6"
SE3307	15	13	N/A	12.94"	.207"	10	.207"	1002 .193"	38.9"
SE7145	10	16	N/A	14.78"	.207"	12	.207"	1002 .193"	46.7"
SE1308	19	17	N/A	12.02"	.207"	9	.207"	1002 .193"	50.5"
SE5313	19	20	N/A	11.10"	.207"	8	.207"	1001 .177"	57.5"
SE4300	22	20	N/A	12.02"	.207"	9	.207"	1002 .193"	57.0"
SE5307	25	20	N/A	14.28"	.207"	12	.207"	1002 .193"	57.0"
SE5308	30	22	N/A	16.62"	.207"	14	.207"	1002 .193"	64.8"

Chain Diameter Reference Charts

	Pewag Sq	uare Link Cr	oss Chain	
Trade Size	Decimal	Fraction	Metric	Pitch
3.7 mm	0.145"	9/64"	3.7 mm	11 mm
4.5 mm	0.177"	5/32"	4.5 mm	18 mm
5.6 mm	0.221"	15/64"	5.6 mm	24 mm
7 mm	0.276"	9/32"	7 mm	30 mm
8.2 mm	0.322"	21/64"	8.2 mm	33 mm
10 mm	0.394"	25/64"	10 mm	35 mm
12 mm	0.472"	15/32"	12 mm	45 mm
14 mm	0.551"	35/64"	14 mm	43 mm
16 mm	0.630"	5/8"	16 mm	56 mm
18 mm	0.709"	45/64"	18 mm	52 mm
21 mm	0.827"	53/64"	21 mm	66 mm



Diameter: The diameter (A) is the thickness of the steel wire material used to form the chain link. The measurement should be taken at an unbent area of the link where possible.

Pitch: The Pitch (B) Is the inside measurement of the chain link's length.

Diameter & Pitch: There are two primary measurements of importance when measuring chain links used in the manufacturing of tire chains. These are the diameter of the link and the pitch of the link. The illustration shows the proper way to take these measurements.

	Glacier T	wist Link Cro	oss Chain	
Trade Size	Decimal	Fraction	Metric	Pitch
1/0	0.177"	11/64"	4.5 mm	1.180"
3/0	0.207"	13/64"	5.25 mm	0.920"
4/0	0.234"	15/64"	5.95 mm	1.000"
6/0	0.281"	9/32"	7.14 mm	1.250"
7/0	0.312"	5/16"	7.92 mm	1.390"
9/0	0.375"	3/8"	9.53 mm	1.260"
11/0	0.437"	7/16"	11.10 mm	1.562"
14/0	0.531"	17/32"	13.50 mm	1.734"
	Glacier Sq	uare Link Cr	ross Chain	
Trade Size	Decimal	Fraction	Metric	Pitch
5 mm	0.215"	3/16"	5.4 mm	20.9 mm
7 mm	0.274"	1/4"	7.0 mm	24.4 mm
8 mm	0.314"	5/16"	8.0 mm	30.3 mm
10 mm	0.399"	3/8"	10.1 mm	35.4 mm
12 mm	0.472"	7/16"	12.1 mm	45.0 mm
		Side Chain		
Trade Size	Decimal	Fractional	Metric	Pitch
#1	0.162"	5/32"	3.96 mm	1.250"
1/0	0.177"	11/64"	4.50 mm	1.250"
2/0	0.192"	3/16"	4.88 mm	1.296"
4/0	0.218"	7/32"	5.54 mm	1.390"
6/0	0.281"	9/32"	7.14 mm	1.810"
7/0	0.312"	5/16"	7.93 mm	1.920"
9/0	0.375"	3/8"	9.52 mm	2.170"

7/16"


11.10 mm

2.330"

64)

11/0

0.437"

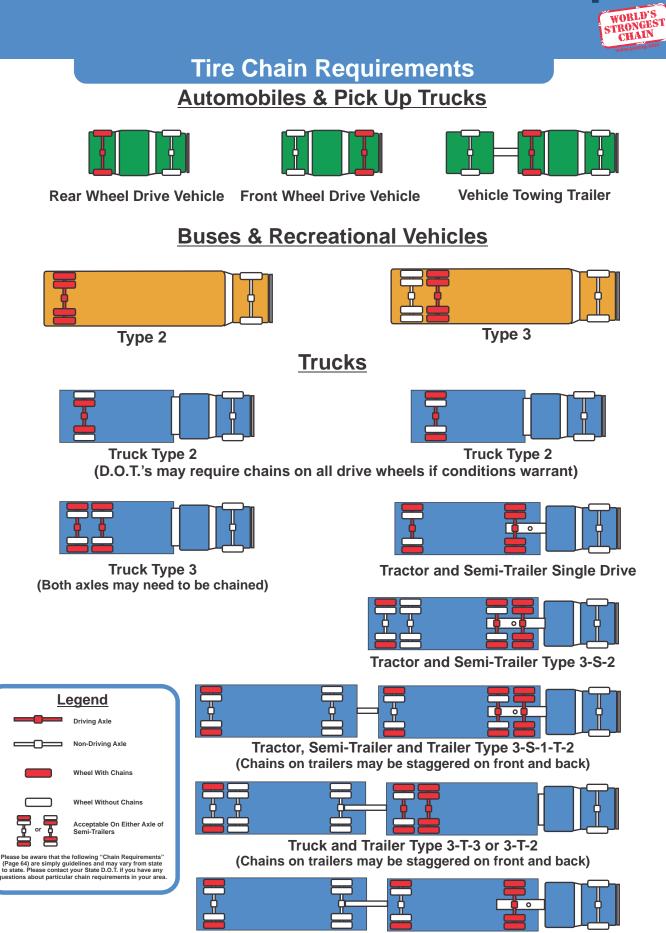

Tractor, Semi-Trailer and Trailer Type 2-S-1-T-2 (Chains on trailers may be staggered on front and back)





Mission Statement



Because of our joy and determination to innovate, we at Pewag manufacture the world's best chains today and in the future. The high

quality of our products and services, as well as the passionate performances of our employees, guarantee safety for moving people and goods. Our success is measured by our customers.



INSTA-CHAIN[™]



INSTANT TRACTION AT YOUR COMMAND™



Features Pewag "All-Square" link chain for superior traction
Grease-able wheels, arm pivots, and ball joints = LONGER LIFE
Fits ½ ton thru Class 8 trucks, 6 or 12 strand steel or anti-spark
Accepted by <u>ALL</u> state DOT's to meet chain requirements

CALL US TODAY FOR MORE INFORMATION: (800)445-2895

(66)



Sales Terms & Conditions

PEWAG INC. TERMS AND CONDITIONS OF SALE

I. Offer and Contract No offer or contract shall be binding upon Pewag Inc. (The "Seller") except by issuance of the seller's printed acknowledgment form. Acceptance by the seller of buyer's (The "Buyer") order is expressly made conditional on assent of these Terms and Conditions. (The "Terms and Conditions"), either by written acknowledgment or by conduct of Buyer that recognizes existence of a contract with respect to the products (The "Products") and services described on Seller's acknowledgment . No additional or different terms or conditions will be binding upon Seller unless specifically agreed to in writing; failure of Seller to object to conditions contained in any other writing or other communication from Buyer shall not be construed as a waiver of these Terms and Conditions nor acceptance of any other provisions. These Terms and Conditions also serve as notice of Seller's objection to and rejection of any terms and conditions of purchase or sale included in Buyers order or other writing that are different from or additional to these Terms and Conditions. Paragraph headings herein are for convenience only and are not to be considered in interpreting any of the provisions herein.

II. Delivery and Risk of Loss and Licenses

 Delivery of the Products to a common carrier at Seller's principal place of business or at any other loading point, if so agreed to by the parties in writing, shall constitute delivery to Buyer ("Delivery") and regardless of shipping terms or freight payment, all risk the loss or damage in transit shall, upon Delivery, shift to Buyer. If Buyer is responsible for any shipment delay, Seller's written notification to Buyer that the Products ordered hereunder are ready for shipping shall constitute Delivery to Buyer, and all further risk of loss or damage as well as all costs for handling, transportation and storage shall be borne by Buyer.

 Seller shall not be liable for any damages as a result of any delay or failure to deliver due to any cause beyond Seller's reasonable control, including without limitation, any act of God, act of buyer, embargo or other government act, regulation or request, fire, accident, strike, slowdown, war, riot, delay in transportation or inability to obtain necessary labor, materials or manufacturing facilities

III. Suspension and Cancellation

 If Selier shall be prevented from delivering the Products as a result of delay or default on the part of the buyer, or any other reason beyond the Selier's reasonable control, Selier shall be entitled to reschedule the Delivery or performance date or dates as it shall reasonably require. 2. Buyer may not cancel, terminate or return any orders accepted by the Seller in accordance with Article I hereof, except with Seller's prior written consent and then only upon such terms as shall be acceptable to Seller, in its sole discretion. Authorized return of shipments must be returned in good order and condition to Seller's principal place of business, unless otherwise specified by Seller, must be accompanied by a packaging slip, and must have transportation and insurance charges prepaid. Collect of unauthorized return of shipments will not be accepted by Seller. Buyer agrees to pay Seller a restocking fee of twenty percent (20%) of the original purchase price for any return shipments authorized by Seller. Buyer shall receive a credit for the purchase price for any amount due to Seller for the aforementioned restocking fee, or any authorized return shipments, provided that any Products are returned to Seller in good order and re-sellable condition as determined by Seller in its sole discretion.

IV. Products Seller reserves the right to revise and discontinue Products at any time and without prior notice. Seller will ship Products that have the same or similar functionality and performance of the Products ordered, but changed, including but not limited to changes with regard of color, construction, measurements and weight, due to technical requirements between what is shipped and what is described in specification sheets, catalogs, brochures or the like, are possible and shall not constitute a defect in the product or non-compliance on the part of the Seller.

V. Prices and Payment

1. If the Products are shipped from Seller's principal place of business or from any other location within the U.S.A., The quoted price is F.O.B. Seller's principal of business or the location of shipment, whichever is applicable unless otherwise agreed upon in writing. 2. A minimum order of one hundred U.S. Dollars (\$100.00) is required.

The Seller reserves the right to alter the price of products quoted in the catalogue. All prices are subject to change prior to Seller's issuance of an acceptance form. For all prices, 3. Δ products and services the Seller reserves the right to make adjustments due to changing market conditions, product discontinuation or other externuating circumstances. 5. The quoted price of the Products does not include palletization, insurance, taxes, freight and

5. The quoted pice of the Products does not include patient/ation, insufance, taxes, freight and shipping charges or similar charges in the products does not include patient/ation, insufance, taxes, freight and shipping charges or similar charges of shipments of the Products and Buyer shall reimburse Seller for any such charges paid by Seller, unless otherwise agreed upon in writing. The Shipping policy may vary between different product groups, please refer to the most recent seller price list and/or catalogue for detailed information.

6. To the extent that any Products shipped outside the continental U.S. Are subject to any duties, tariffs, taxes, freight costs, palletization or similar charges, which are not included in the quoted price, shall be borne by Buyer, unless otherwise agreed upon in writing. 7. Payment for all orders must be received by Seller within thirty (30) days of the date of the

invoice

Seller reserves the right to demand prepayment on all orders by customers who have no established credit with the Seller.

9. Seller reserves the right to make deliveries in installments. All such installments shall be separately invoiced and paid for when due, without regard to subsequent deliveries. Overdue amounts shall bear a delinquency charge of interest at eighteen percent (18%) per annum or the maximum rate permitted by law. The interest rate is subject to change at Seller's discretion

VI. Taxes and Other Charges

And manufacturer's tax, occupation tax, use tax, sales, tax, excise tax, duty, custom, inspection or testing fee or change of any nature whatsoever imposed by any governmental authority, on or measured by the transaction between Seller and Buyer shall be paid by Buyer in addition to the price quoted or invoiced. In the event that Seller is required to pay any such tax, fee or charge, buyer shall reimburse Seller therefore unless otherwise agreed upon in writing.

VII. Limited Warranties

Seller warrants that the Products shall be free of defects in material and workmanship for a period of ninety (90) days from the receipt of the products by buyer, unless otherwise agreed upon on writing. Seller's obligations under the aforesaid warranty shall be repairing or replacing any part or parts of the Products, which if properly installed, use and maintained, prove defective in material or workmanship. Any freight charges shall be the responsibility of buyer. Such repair or replacement shall be Seller's sole obligation and Buyer's sole remedy hereunder and shall be conditioned upon A.) Seller's receipt of written notice of any alleged defect within five (5) days after its discovery, and B.) At Seller's option, return of such defective products or part thereof freight prepaid to Seller's principal place of business. Any Product repaired or replaced pursuant to this warranty will be warranted for the remain of the original warranty period.

2 Seller's obligations under paragraph 1. Of this provision shall not apply to any component or art of the Products sold hereunder which A.) Is consumed by the normal wear and tear, or B.) Which is consumed by operation above rated capacity, excessive or abnormal use, or C.) Which has been damaged due to negligent or faulty use, alteration, maintenance, storage, repair, operation or handling by Buyer, or E.) Which is installed or operated in disregard of the operating manual/instructions of the Products.

 Any description or representation of the Products whether in writing or made orally by Seller or Seller's agents, specifications, samples, models, bulletins, drawings, diagrams, engineering sheets or similar materials used in connection with Buyer's order are for the sole purpose of identifying the Products and shall not be construed as an express warranty. Any suggestions by Seller or Seller's agents regarding use, application or suitability of the Products shall not be construed as an express warranty unless confirmed to be such in writing by Seller. Performance figures and specifications by Seller are estimates only and are not warranties, unless expressly stated otherwise

THE WARRANTY EXPRESSED HEREIN SHALL BE IN LIEU OF ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND IS IN LIEU OF ANY AND ALL OTHER OBLIGATIONS OR LIABILITY ON SELLER'S PART.

 VIII. Warranty Claims, Inspection, and Waiver of Defects
 Written notice of any alleged covered defect must be presented to Seller within five (5) days after its discovery, and Seller must be allowed to inspect the Products while they are in the alleged defective condition. Use of the Products must be suspended until the written notice of an alleged defect, proceeds must be suspended until written clearance is issued by Seller for continued use, provided that Seller, upon receipt of written notice of an alleged defect, proceeds without unreasonable delay to remedy any defect coming within the warranty.

 Buyer shall inspect all Products immediately upon their arrival and shall give written notice within five (5) days after receipt of the products of any claim that the Products do not conform to the terms of the contract. Seller shall have reasonable access to inspect any allegedly non-conforming Products

3. Buyer waives any right to assert any claim against Seller arising from any non-confromity of the Products sold hereunder which would have been observable on reasonable inspection of testing within five (5) days after Delivery.

IX. Limitation of Liability

Except as otherwise agreed in writing, Seller's liability with respect to the Products shall be limited to the contact price.
 SELLER SHALL NOT BE SUBJECT TO ANY OTHER OBLIGATIONS OR LIABILITIES,

WHETHER ARISING OUT OF BREACH OF CONTRACT, WARRANTY, TORT (INCLUDING NEGLIGENCE AND STRICT LIABILITY), OR OTHER THEORIES OF LAW, WITH RESPECT TO THE PRODUCTS SOLD OR SERVICE RENDERED BY SELLER, OR UNDERTAKINGS, ACTS, OR OMISSIONS RELATING THERETO. WITHOUT LIMITING THE GENERALITY OF THE OR OMISSIONS RELATING THERE IO, WITHOUT BE LIABLE FOR ANY INCIDENTAL, INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES OR ANY OTHER LOSS, DAMAGE OR EXPENSE OF ANY KIND, INCLUDING LOSS OF PROFITS, ARISING IN CONNECTION WITH THE CONTRACT OR WITH THE USE OR LIABILITY TO USE SELLER'S PRODUCTS FURNISHED UNDER THIS CONTRACT. SELLER'S SOLE LIABILITY AND BUYER'S SOLE REMEDY IS LIMITED TO EITHER (1) REPAIR OR REPLACEMENT OF DEFECTIVE PARTS OR PRODUCTS, AND/OR (2) AT SELLER'S OPTION, RETURN THE PRODUCTS TO SELLER AND REFUND OF PURCHASE PRICE

X. Severability If at any time, any one or more of the provisions of these Terms and Conditions become invalid, illegal or unenforcable in any respect for any reason, the validity, legality and enforceability of any such provision in every other respect and of the remaining provisions of these Terms and conditions shall not be in any way impaired.

XII. Non-Waiver

The failure of the Seller to enforce at any time or for any period of time, the provisions of these terms and Conditions, shall not be construed as a waiver of such provisions or of the right of the Seller thereafter to enforce each and every such provision

XIII. Arbitration

All disputes arising under this Contract shall be settled by final and binding arbitration in the city of Chicago, Illinois in accordance with the Commercial Arbitration Rules of the American Arbitration Association then in effect. The parties may agree on the selection of a single arbitrator, but in the event they cannot agree, each party shall select an arbitrator and the two selected arbitrators shall select a third arbitrator. The award by the arbitrator or arbitrators shall be final and judgement upon

Select a time and rendered may be entered in any court of a bital behavior benefit and puge the award endered may be entered in any court having jurisdiction thereof. XIV. Governing Law THIS AGREEMENT AND ANY SALES HERE UNDER SHALL BE CONSTRUED IN ACCORDANCE WITH AND GOVERNED BY THE LAWS OF THE STATE OF ILLINOIS, WITHOUT REGARD TO ITS CONFLICTS OF LAW RULES.

XV. Complete Agreement

These Terms and Conditions of Sale and Seller's acceptance form constitutes the complete and exclusive statement of the agreement between the parties hereto. It supersedes all prior written and oral statements, including prior representations, statements, conditions or warranties.





Distributed By: