

 *Maxxima*[®]

Table Of Contents 2012

Work Lights.....	4-6
Warning Lights.....	7-10
Compartment/Cargo Lights.....	11-13
Stop/Tail/Turn.....	14-16
Park Turn.....	17-19
Hybrid & Gorilla Series.....	20
Dual Voltage 12/24VDC.....	21-22
Back-Up.....	23-24
Bus.....	25
Identification Bars.....	27
Clearance Marker.....	28-35
MLS Series Strip Lighting.....	36
Courtesy/Projector.....	37-38
Mounting Accessories.....	39
Electrical.....	40
Flashlights/Promotional Items.....	41
Maxxima Warranty/Displays.....	42
Catalog Part Number Cross Reference.....	43

The following terms have been used throughout this catalogue

STT— Stop/Tail/Turn

PCAT— Park/Clearance/Auxiliary Turn

PFT— Park/Front Turn

PRT— Park/Rear Turn



125 Cabot Court Hauppauge, NY 11788 USA

Tel: 631.434.1200 Toll Free: 866-MAXXIMA Fax: 631.952.0349 info@maxxima.com maxxima.com

Where Quality Manufacturing Is Standard Operating Procedure

Maxxima's new product innovations and technological achievements continue to lead the commercial vehicle market.

LED lamps with extended life, energy saving characteristics and intense glow combined with specially formulated proprietary lens designs has provided some of the most exciting new products in the industry. With several patents issued, Maxxima will continue to revolutionize the lighting industry with superior light emission, greater visibility and elevated performance. Since 2008 all Maxxima 4" products incorporate Spin Welding and all oval lamps incorporate Linear Welding techniques.

By purchasing Maxxima, you become the owner of exceptional lighting products recognized by the most reputable dealers in the world. Please examine many of the unique features outlined in this brochure. Maxxima is proud to recommend its highly qualified and professional dealer network to guide you through your product selection.

Come grow with us and be a part of history to replace Edison's century old incandescent bulb with Maxxima LED Lighting Products.

Maxxima continually strives to upgrade and improve the quality, materials, workmanship and manufacturing processes of its product line. Respectfully, specifications displayed in this brochure may be subject to change without notification. Any changes or amendments will be reflected in ensuing printings.

ALL MAXXIMA LED VEHICLE LIGHTING PRODUCTS ARE US FMVSS 108 AND CANADIAN CMVSS 108 COMPLIANT.

Maxxima Mission and Values

Our Mission: At Maxxima, We design, fabricate and deliver innovative, dependable and technologically advanced products coupled with customer satisfaction.

Our Values: As a Company we value.

- Candor, respect, integrity and a moral compass as a guide.
- A good reputation and brand because if ever destroyed can never be retrieved, even with substantial financial resources.
- Enthusiasm over our customers and their needs.
- Accountability to customers, employees, and partners.
- Finding and developing talented individuals.
- Our suppliers, partners and field associates.
- Innovations and creativity.
- Product quality and reliability, speed and pricing integrity.
- A global mind set to our products and services.



NEW

NEW INDUSTRY FIRST—700 LUMEN 3 LED EXTREME TEMPERATURE WORK LIGHT



Part Number
MWL-14
M50126

Swivel Bracket

LED's 3
Lumens 700
Dimensions 5.9" X 2.2" X 0.9"
Voltage 12/24VDC
Amp Draw 1,100ma 12V 550ma 24V
Connector 2 Wire
Mounting 2 Hole Surface Mount

- 300° Fahrenheit Temperature Rated
- High Temp Glass Lens
- Flood Beam Pattern
- Aluminum Housing
- Auto Select 12/24VDC
- Low LED Amp Draw
- Optional Swivel Mount Bracket
- 5 Year Warranty

NEW

NEW INDUSTRY FIRST—400 LUMEN 2 LED EXTREME TEMPERATURE WORK LIGHT



Part Number
MWL-13
M50126

Swivel Bracket

LED's 2
Lumens 400
Dimensions 5.9" X 2.2" X 0.9"
Voltage 12/24VDC
Amp Draw 550ma 12V 275ma 24V
Connector 2 Wire
Mounting 2 Hole Surface Mount

- 300° Fahrenheit Temperature Rated
- High Temp Glass Lens
- Flood Beam Pattern
- Aluminum Housing
- Auto Select 12/24VDC
- Low LED Amp Draw
- Optional Swivel Mount Bracket
- 5 Year Warranty

1,500 LUMEN 10 LED SPECIAL PERFORMANCE DUAL VOLTAGE RECTANGULAR WORK LIGHT



Part Number
MWL-07SP

LED's 10
Lumens 1,500
Dimensions 6.3" x 3.9" x 1.8"
Voltage Auto Select 12/24VDC
Amp Draw 2.5A 12V 1.4A 24V
Connector 2 Wire
Mounting 5/16" Diameter Bolt

- Philips Lumileds LUXEON® Rebel LED's
- Dual 12/24VDC Voltage
- Flood Beam Pattern
- Aluminum Powder Coated Housing
- Polycarbonate Lens
- Low LED Amp Draw
- Stainless Steel Bolt & Bracket
- 5 Year Warranty

1,000 LUMEN 6 LED SPECIAL PERFORMANCE DUAL VOLTAGE RECTANGULAR WORK LIGHT



Part Number
MWL-06SP

LED's 6
Lumens 1,000
Dimensions 6.3" x 3.9" x 1.8"
Voltage Auto Select 12/24VDC
Amp Draw 1500MA 12V 800MA 24V
Connector 2 Wire
Mounting 5/16" Diameter Bolt

- Philips Lumileds LUXEON® Rebel LED's
- Dual 12/24VDC Voltage
- Flood Beam Pattern
- Aluminum Powder Coated Housing
- Polycarbonate Lens
- Low LED Amp Draw
- Stainless Steel Bolt & Bracket
- 5 Year Warranty

700 LUMEN 6 LED SPECIAL PERFORMANCE DUAL VOLTAGE RECTANGULAR WORK LIGHT



Part Number
MWL-05SP

LED's 6
Lumens 700
Dimensions 6.3" x 3.9" x 1.8"
Voltage Auto Select 12/24VDC
Amp Draw 1120MA 12V 600MA 24V
Connector 2 Wire
Mounting 5/16" Diameter Bolt

- Philips Lumileds LUXEON® Rebel LED's
- Dual 12/24VDC Voltage
- Flood Beam Pattern
- Aluminum Powder Coated Housing
- Polycarbonate Lens
- Low LED Amp Draw
- Stainless Steel Bolt & Bracket
- 5 Year Warranty

GREEN 6 LED SPECIAL PERFORMANCE DUAL VOLTAGE 4X4 ATV RECTANGULAR WORK LIGHT

Part Number
MWL-05SPGR

Green LED

LED's 6
Dimensions 6.3" x 3.9" x 1.8"
Voltage Auto Select 12/24VDC
Amp Draw 1120MA 12V 600MA 24V
Connector 2 Wire
Mounting 5/16" Diameter Bolt

- 6 Green LED's—Soft Light Won't Spook Prey
- Philips Lumileds LUXEON® Rebel LED's
- Preferred By Hunters
- Dual 12/24VDC Voltage
- Flood Beam Pattern
- Aluminum Powder Coated Housing
- Polycarbonate Lens
- Low LED Amp Draw
- Stainless Steel Bolt & Bracket
- 5 Year Warranty



400 LUMEN 6 LED DUAL VOLTAGE RECTANGULAR WORK LIGHT

Part Number
MWL-04

LED's 6
Lumens 400
Dimensions 5.9" x 3.6" x 1.6"
Voltage Auto Select 12/24VDC
Amp Draw 870ma 12V 470MA 24V
Connector 2 Wire
Mounting 5/16" Diameter Bolt

- Philips Lumileds LUXEON® Rebel LED's
- Dual 12/24VDC Voltage
- Flood Beam Pattern
- Aluminum Powder Coated Housing
- Polycarbonate Lens
- Low LED Amp Draw
- Stainless Steel Bolt & Bracket
- 5 Year Warranty



750 LUMEN 6 LED 4" ROUND RUBBER HOUSING WORK LIGHT

Part Number
MWL-11HL
MLH-11HL
MRH-11
M50411
M50412

Lamp Only
Housing Only
Black Grommet
Angled Grommet

LED's 6
Lumens 750
Diameter 4.40"
Voltage 12/24VDC
Amp Draw 1600ma 12V / 940ma 24V
Connector Single Wire
Mounting 5/16" Diameter Bolt

- Dual 12/24VDC Voltage
- Flood Beam Pattern
- Black Rubber Housing
- Polycarbonate Lens
- Low LED Amp Draw
- Stainless Steel Grommet Cover
- 5 Year Warranty



M50411



M50412



1" ROUND MICRO LED WORK LIGHT

Part Number
M09370WCL-NS

LED's 1
Lumens 50
Diameter 1"
Voltage 12VDC
Amp Draw 130ma 12V
Connector Blunt Cut Leads
Mounting 1 1/8" Hole

- 1" Micro Design
- Built In Black Grommet Included
- Polycarbonate Lens
- Low LED Amp Draw
- Stainless Steel Grommet Cover Included
- 5 Year Warranty



1,200 LUMEN 6 LED SPECIAL PERFORMANCE 5" ROUND WORK LIGHT



Part Number
MWL-01SP



LED's 6
Lumens 1,200
Diameter 5"
Voltage 12/24VDC
Amp Draw 2500ma 12V / 1300ma 24V
Connector 2 Wire Leads
Mounting 5/16" Diameter Bolt

- Philips Lumileds LUXEON® Rebel LED's
- Dual 12/24VDC Voltage
- Flood Beam Pattern
- Aluminum Powder Coated Housing
- Polycarbonate Lens
- Low LED Amp Draw
- Stainless Steel Bolt & Bracket
- 5 Year Warranty

275 LUMEN 6 LED 5" ROUND WORK LIGHT



Part Number
MWL-01

LED's 6
Lumens 275
Diameter 5"
Voltage 12VDC
Amp Draw 1200ma 12V
Connector 2 Wire Leads
Mounting 5/16" Diameter Bolt

- Flood Beam Pattern
- Aluminum Powder Coated Housing
- Polycarbonate Lens
- Low LED Amp Draw
- Stainless Steel Bolt & Bracket
- 5 Year Warranty

2" ROUND 2 LED MINI 250 LUMEN LED SWIVEL MOUNT WORK LIGHT



Part Number
MWL-10SP-SM

LED's 2
Lumens 250
Diameter 2"
Voltage 12VDC
Amp Draw 630ma 12V
Connector 2 Wire Leads
Mounting Stainless Steel Bracket

- Philips Lumileds LUXEON® Rebel LED's
- 2" Mini Design
- Polycarbonate Lens & Housing
- Low LED Amp Draw
- Stainless Steel Bolt & Swivel Bracket
- 5 Year Warranty

2" ROUND 2 LED MINI 250 LUMEN LED GROMMET MOUNT WORK LIGHT



Part Number
MWL-10SP
M50124
M50413

Stainless Grommet Cover
Angled Grommet

LED's 2
Lumens 250
Diameter 2"
Voltage 12VDC
Amp Draw 630ma 12V
Connector Blunt Cut Leads
Mounting 2 1/8" Hole

- Philips Lumileds LUXEON® Rebel LED's
- 2" Mini Design
- Polycarbonate Lens & Housing
- Low LED Amp Draw
- Black Vinyl Grommet Included
- 5 Year Warranty



M50124



M50413

8" ROUND LED WARNING LIGHT WITH CARD TAP TECHNOLOGY

Part Number

- M20374BCL **Blue Surface Mount**
- M20374YCL **Amber Surface Mount**
- M20374RCL **Red Surface Mount**
- M20374WCL **White Surface Mount**
- M20374PMK **Pipe Mount Kit for M20374**
- M20377BCL **Blue Magnetic / Pipe Mount**
- M20377RCL **Red Magnetic / Pipe Mount**
- M20377WCL **White Magnetic / Pipe Mount**
- M20377YCL **Amber Magnetic / Pipe Mount**

- Card Tap Pattern Change Technology
- Surface or Pipe / Magnet Mount
- 11 Selectable Flash Patterns
- Class 1 & Title 13 Included
- Low LED Amp Draw
- Slim Profile Design
- Completely Resin Sealed Electronics
- 5 Year Warranty



LED's	9
Diameter	8.00"
Height	3"
Amp Draw	650ma
Voltage	12.8 VDC
Connector	Blunt Cut Leads
Mounting	Three Hole Mount



M20374PMK
Pipe Mount Kit for
M20374 Series



6 LED SURFACE MOUNT EMERGENCY WARNING

Part Number

- M20375BRCL **Blue / Red Clear Lens**
- M20375WYCL **White / Amber Clear Lens**
- M20375YCL **Amber Clear Lens**
- M20375WCL **White Clear Lens**
- M20375RWCL **Red / White Clear Lens**
- M50119 **Black Vinyl Grommet**
- M50120 **Chrome Bezel**
- M50121 **Stainless Steel Bracket**


- Dual 12/24VDC Auto Select
- 24 Selectable Flash Patterns
- Synchronized / Alternating Flash
- Class 1 & Title 13 Included
- Polycarbonate Lens & Housing
- Snap-On Black Bezel Included
- Low Profile Design
- Completely Resin Sealed Electronics
- Optional Chrome Bezel
- Optional Stainless Steel Bracket
- 5 Year Warranty



LED's	6
Width	5.90"
Depth	1.40"
Height	1.50"
Amp Draw	400ma 12V 240ma 24V
Voltage	12.8 VDC
Connector	Blunt Cut Leads



M50119
Black Vinyl Grommet



M50120
Chrome Bezel



M50121
Stainless Bracket

4 LED SURFACE MOUNT EMERGENCY WARNING



Part Number

- M20373BCL Blue Clear Lens
- M20373BRCL Blue / Red Clear Lens
- M20373BWCL Blue / White Clear Lens
- M20373GYCL Green/Amber Clear Lens
- M20373RCL Red Clear Lens
- M20373RWCL Red / White Clear Lens
- M20373YCL Amber Clear Lens
- M20373WYCL White / Amber Clear Lens
- M20373WCL White Clear Lens
- M50113 Black Vinyl Grommet
- M50123 Black Wide Channel Grommet
- M50114 Chrome Bezel
- M50116 Stainless Mounting Bracket

- 18 Selectable Flash Patterns
- Class 1 & Title 13 Included
- Synchronized / Alternating Flash
- Polycarbonate Lens & Housing
- Snap-On Black Bezel Included
- Low Profile Design
- Completely Resin Sealed Electronics
- Optional Chrome Bezel
- Optional Stainless Steel Bracket
- Optional Grommets
- 5 Year Warranty



M50113 / M50123
Black Vinyl Grommets



M50114
Chrome Bezel



M50116
Stainless Bracket

- LED's 4
- Width 4.80"
- Depth 1.60"
- Height 1.3"
- Amp Draw 400ma
- Voltage 12.8 VDC
- Connector Blunt Cut Leads
- Mounting Surface or Grommet Mount

3 LED SURFACE MOUNT EMERGENCY WARNING



Part Number

- M20372BCL Blue Clear Lens
- M20372RCL Red Clear Lens
- M20372WCL White Clear Lens
- M20372YCL Amber Clear Lens
- M50110 Black Grommet
- M50122 Wide Channel Black Grommet
- M50111 Chrome Bezel
- M50115 Stainless Steel Bracket

- LED's 3
- Width 3.90"
- Depth 1.70"
- Height 1.30"
- Amp Draw 200ma
- Voltage 12.8 VDC
- Connector Blunt Cut Leads
- Mounting Surface or Grommet

- 11 Selectable Flash Patterns
- Class 1 & Title 13 Included
- Synchronized / Alternating Flash
- Polycarbonate Lens & Housing
- Snap-On Black Bezel Included
- Low Profile Design
- Completely Resin Sealed Electronics
- Optional Chrome Bezel
- Optional Stainless Steel Bracket
- Optional Grommets
- 5 Year Warranty



M50110 / M50122
Black Vinyl Grommets



M50111
Chrome Bezel



M50115
Stainless Steel Bracket

1" ROUND MICRO EMERGENCY WARNING



Part Number

- | | |
|-----------|------------------|
| M09370Y | Amber |
| M09370YCL | Amber Clear Lens |
| M09370R | Red |
| M09370RCL | Red Clear Lens |
| M09370WCL | White Clear Lens |
| M09370BCL | Blue Clear Lens |

- | | |
|-----------|-----------------|
| LED's | 1 |
| Diameter | 1" |
| Amp Draw | 210ma |
| Voltage | 12.8 VDC |
| Connector | Blunt Cut Leads |
| Mounting | Grommet |

- 11 Selectable Flash Patterns
- Polycarbonate Lens & Housing
- Synchronized / Alternating Flash
- Stainless Steel Bezel Included
- Black Vinyl Grommet Included
- Low Profile Design
- Completely Resin Sealed Electronics
- Control Module Included
- 5 Year Warranty

4" ROUND EMERGENCY WARNING

Part Number

- | | |
|---------|-------|
| M42700Y | Amber |
| M42700R | Red |

- | | |
|---------------|-------------------------|
| LED's | 32 |
| Diameter | 4.25" |
| Depth | 2.40" |
| Legal Heading | SAE J845 (SAE W3-2(36)) |
| Amp Draw | 200ma |
| Voltage | 12.8 VDC |
| Connector | PL-3 |
| Mounting | Grommet |

- 3 Selectable Patterns
- Dual, Quad, Split Flash
- Synchronized / Alternating Flash
- Polycarbonate Lens & Housing
- Completely Resin Sealed Electronics
- Moisture & Vibration Proof
- Smart Chip Surge Protection
- 5 Year Warranty



6" OVAL EMERGENCY WARNING

Part Number

- | | |
|---------|-------|
| M63200Y | Amber |
| M63200R | Red |

- | | |
|---------------|-------------------------|
| LED's | 32 |
| Width | 6.40" |
| Depth | 1.70" |
| Height | 2.20" |
| Amp Draw | 200ma |
| Legal Heading | SAE J845 (SAE W3-2(40)) |
| Voltage | 12.8 VDC |
| Mounting | Grommet |
| Connector | PL-3 |

- 3 Selectable Patterns
- Dual, Quad, Split Flash
- Synchronized / Alternating Flash
- Polycarbonate Lens & Housing
- Completely Resin Sealed Electronics
- Moisture & Vibration Proof
- Smart Chip Surge Protection
- 5 Year Warranty



RECTANGULAR EMERGENCY WARNING



Part Number	
M42210Y	Amber
M42210R	Red
LED's	52
Width	5.3"
Depth	2.0"
Height	3.4"
Amp Draw	280ma
Legal Heading	SAE J845 (SAE W3-2(40)
Voltage	12.8 VDC
Mounting	Grommet
Connector	PL-3

- 2 Selectable Patterns
- Dual & Quad Flash
- Synchronized / Alternating Flash
- Polycarbonate Lens & Housing
- Completely Resin Sealed Electronics
- Moisture & Vibration Proof
- Smart Chip Surge Protection
- 5 Year Warranty


5" WARNING BEACON



Part Number	
M42705Y-SP	Amber
LED's	3
Height	4.80"
Diameter	2.90"
Amp Draw	240ma
Legal Heading	SAE J845 W3
Voltage	12-80 VDC
Mounting	2 Hole
Connector	2 Leads

- Surface Mount
- Polycarbonate Lens & Housing
- 5 Year Warranty

BATTERY OPERATED EMERGENCY FLASHERS



Part Number	
SDL-50-A	Amber
SDL-52-A	Red
LED's	18
Width	6.3"
Height	3.6"
Depth	1.6"

- Visible 1 1/4 Miles
- 3 Functions Steady, Flash, Split Flash
- Stationary Vehicle Magnet Mount
- Built In Vertical & Horizontal Stand
- Operates 140 Hours on 4 AA
- Batteries Not Included
- 1 Year Warranty

3.50" ROUND BATTERY OPERATED EMERGENCY FLASHERS



Part Number	
SDL-35R	Red
SDL-35Y	Amber
LED's	1
Diameter	3.0"
Height	1.5"

- Visible 1/2 Mile
- Dual Function Steady & Flash
- Stationary Vehicle Magnet Mount
- Measures 3.50" X 1.50"
- Waterproof
- Magnet Mount
- Operates 75 Hours on 3 AAA
- Batteries Not Included
- 1 Year Warranty

INTERIOR WHITE LED FLAT PANEL LIGHTING- WAFER THIN 1/2" DESIGN



Part Number	M84411-B	M84412-B	M84414-BWW Warm White M84414-BCW Cool White
Dimensions	4.7" X 6.3"	4.7" X 4.7"	3.40" X 3.20"
Depth	0.50"	0.50"	0.50"
Luminous Flux	331	161	100 BWW 80 BCW
CRI	92	91	NA
Color Temp	6,568	6,479	NA
Voltage	12.8VDC	12.8VDC	12.8VDC
Amp Draw	900MA	660MA	NA
Connector	2 Wire	2 Wire	2 Wire
Mounting	Bracket	Bracket	Bracket

- Stack Free LED Design
- Even Light Dispersion
- No Hot Spots
- Flat Screen Lens
- Ultra Thin 1/2" Design
- Mounting Bracket Included
- Black Powder Coated Aluminum Frame
- Low Amp Draw
- 5 Year Warranty


WATERPROOF EXTERIOR UNDERCARRIAGE LIGHTING



Part Number	M84420	M84421	M84422
Length	11"	21.7"	2.30"
Height	1"	1"	1"
Depth	1.2"	1.2"	1.10"
LED's	6	12	2
Lumens	195	390	50
Voltage	12.8 VDC	12.8VDC	12.8VDC
Amp Draw	560MA	1,300MA	240ma
Mounting	Surface	Surface	Surface
Connector	2 Wire	2 Wire	2 Male .180 Bullets

- Waterproof Exterior Undercarriage Lighting
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens
- Aluminum Housing
- 60 Degree Light Output
- Low Amp Draw
- 5 Year Warranty

TYPE 1 CARGO LIGHT WITH ADJUSTABLE REFLECTOR HOOD

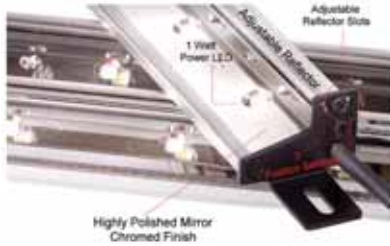

Part Number

M844280

M84403

M84404

LED's	9	6	3
Lumen's	500	340	190
Length	18"	12"	6"
Height	1.4"	1.4"	1.4"
Depth	1"	1"	1"
Voltage	12.8 VDC	12.8 VDC	12.8 VDC
Amp Draw	1150ma	680ma	350ma
Connector	12" Wire	12" Wire	12" Wire

- 2 Hole Surface Mount Design
- Polished Adjustable Aluminum Reflector
- Low LED Amp Draw
- 5 Year Warranty

14" LOW PROFILE COMPARTMENT LIGHT



Part Number

M84400

Lumens	120
LED's	50
Length	14"
Height	3.6"
Depth	0.70"
Voltage	12.8 VDC
Amp Draw	350ma
Mounting	Surface
Connector	3 Wire 7" Leads

- 3 Position Auto/On/Off Switch
- 2 Hole Surface Mount
- Polycarbonate Lens & Housing
- Low Amp Draw
- 5 Year Warranty

5.50" INTERIOR DOME LIGHT



Part Number

M84405-A

M84406-A

Lumens	195	255
LED's	15	24
Amp Draw	290	370ma
Diameter	5.50"	5.50"
Depth	0.8"	0.8"
Voltage	12.8 VDC	12.8VDC
Mounting	Three Hole	Three Hole
Connector	2 Wire	2 Wire

- Interior Dome Light
- Polycarbonate Lens & Housing
- Low Amp Draw
- 5 Year Warranty

3" X 6" INTERIOR COMPARTMENT LIGHT



Part Number

M84407-A

Lumens	185
LED's	14
Width	5.8"
Height	2.9"
Depth	0.7"
Amp Draw	290ma
Voltage	12.8 VDC
Mounting	4 Hole 3/16" Dia.
Connector	2 Wire Leads

- Epoxy Coated Sealed Electronics
- Refrigeration Safe
- Snap-On Polycarbonate Lens
- Hidden Mounting Screws
- Low Amp Draw
- Polarity Insensitive Design
- 5 Year Warranty

HIGH OUTPUT FLUSH MOUNT CARGO LIGHT

Part Number

M84409

Lumens 570
 LED's 42
 Width 18.3"
 Height 5.30"
 Depth 1"
 Voltage 12.8 VDC
 Amp Draw 860ma
 Mounting Flush
 Connector 2 Wire 7" Leads

- High Output
- Low Amp Draw
- Refrigeration Safe
- Resin Sealed Electronics
- Polycarbonate Lens
- Powder Coated Aluminum Housing
- 5 Year Warranty



FLUSH MOUNT CARGO LIGHT

Part Number

M84408

Lumens 380
 LED's 28
 Width 18.3"
 Height 5.30"
 Depth 1"
 Voltage 12.8 VDC
 Amp Draw 580ma
 Mounting Flush
 Connector 2 Wire 7" Leads

- Low Amp Draw
- Refrigeration Safe
- Resin Sealed Electronics
- Polycarbonate Lens
- Powder Coated Aluminum Housing
- 5 Year Warranty



FLUSH MOUNT CARGO LIGHT



Part Number

M84410

Black

M84413

Silver

Lumens 570 Hi 185 Low
 LED's 42
 Length 20.4"
 Height 6.3"
 Depth 1.20"
 Voltage 12.8 VDC
 Amp Draw 870ma
 Mounting Flush
 Connector 2 Wire 7" Leads

- OEM Style Connector
- Low Amp Draw
- 3 Position Hi/Low/Off Switch
- Resin Sealed Electronics
- Polycarbonate Lens
- Powder Coated Aluminum Housing
- 5 Year Warranty

4" ROUND STT



Part Number	M56100R	Red
LED's	56	
Diameter	4.25"	
Depth	2.00"	
DOT/SAE	J1395, J1398, J585e	
Voltage	12.8 VDC	
Amp Draw	440ma	
Legal Heading	I6S2T2	
Mounting	Grommet	
Connector	PL-3	

- 4" Round STT
- WSI- Wide Spectrum Illumination
- Sealed Moisture Proof Electronics
- Maxx- Shield Polymer Coating
- Polycarbonate Lens & Housing
- Plated Brass Connector

4" ROUND STT



Part Number	M42100R M42120R	Red Red Flange
LED's	44	
Diameter	4.25"	
Depth	2.00"	
DOT/SAE	J1395, J1398, J585e	
Voltage	12.8 VDC	
Amp Draw	340ma	
Legal Heading	I6S2T2	
Mounting	Grommet	
Connector	PL-3	

- 4" Round STT
- WSI- Wide Spectrum Illumination
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector

4" ROUND STT



Part Number	M42320R	Red
LED's	32	
Diameter	4.25"	
Depth	2.00"	
DOT/SAE	J1395, J1398, J585e	
Voltage	12.8 VDC	
Amp Draw	250ma	
Legal Heading	I6S2T2	
Mounting	Grommet	
Connector	PL-3	

- 4" Round STT
- Superior Lens Optics
- Spin Welded Lens and Housing
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty



4" ROUND STT



Part Number	M42322R M42322RCL M42321R M42323R M42323RCL	Red Red Clear Red Surface Mount Red Flange Red Clear Flange
LED's	9	
Diameter	4.25"	
Depth	2.00"	
DOT/SAE	J1395, J1398, J585e	
Voltage	12.8 VDC	
Amp Draw	240ma	
Legal Heading	I6S2T2	
Mounting	Grommet / Surface / Flange	
Connector	PL-3	

- 4" Round STT
- Patented Lightning Optics
- US Patent No. 8,009,364
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty



4" ROUND STT



Part Number	M42346R M42344R	PL-3 Dry-Fit
LED's	6	
Diameter	4.25"	
Depth	2.00"	
DOT/SAE	J1395, J1398, J585e	
Voltage	12.8 VDC	
Amp Draw	130ma	
Legal Heading	I6S2T2	
Mounting	Grommet	
Connector	PL-3 or Dry-Fit	

- 4" Round STT
- Patented Lightning Optics
- US Patent No. 8,009,364
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty



OVAL STT

Part Number

M63100R**Red**

LED's	60
Width	6.4"
Height	2.2"
Depth	1.6"
DOT/SAE	J1395, J1398, J585e
Voltage	12.8 VDC
Amp Draw	430ma
Legal Heading	I6S2T2
Mounting	Grommet
Connector	PL-3

- 6" Oval STT
- Maxx-Shield Protective Coating
- Sealed Moisture Corrosion Proof Electronics
- Maxx – Shield Polymer Coating
- Polycarbonate Lens & Housing
- Plated Brass Connector



OVAL STT

Part Number

M63420R**Red**

LED's	42
Width	6.4"
Height	2.2"
Depth	1.6"
DOT/SAE	J1395, J1398, J585e
Voltage	12.8 VDC
Amp Draw	350ma
Legal Heading	I6S2T2
Mounting	Grommet
Connector	PL-3

- 6" Oval STT
- Sealed Moisture Corrosion Proof Electronics
- Maxx – Shield Polymer Coating
- Polycarbonate Lens & Housing
- 5 Year Warranty



OVAL STT

Part Number

M63322R**Red****M63322RCL****Red Clear Lens****M63323R****Red Flange****M63323RCL****Red Clear Lens Flange**

LED's	9
Width	6.4"
Height	2.2"
Depth	1.6"
DOT/SAE	J1395, J1398, J585e
Voltage	12.8 VDC
Amp Draw	190ma
Legal Heading	I6S2T2
Mounting	Grommet / Flange
Connector	PL-3

- 6" Oval STT
- Patented Lightning Optics
- US Patent No. 8,009,364
- Sealed Moisture Corrosion Proof Electronics
- Plated Brass Connector
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty



OVAL STT

Part Number

M63320R**Red****M63320RCL****Red Clear Lens**

LED's	9
Width	7.9"
Height	3.3"
Depth	0.8"
DOT/SAE	J1395, J1398, J585e
Voltage	12.8 VDC
Amp Draw	190ma
Legal Heading	I6S2T2
Mounting	Surface 2 Hole
Connector	3 Wire Leads

- 6" Oval Surface Mount STT
- Patented Lightning Optics
- US Patent No. 8,009,364
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty



OVAL STT

Part Number

M63346R**Red**

LED's	6
Width	6.4"
Height	2.20"
Depth	1.60"
DOT/SAE	J1395, J1398, J585e
Voltage	12.8 VDC
Amp Draw	130ma
Legal Heading	I6S2T2
Mounting	Grommet
Connector	PL-3

- 6" Oval STT
- Patented Lightning Optics
- US Patent No. 8,009,364
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty



RECTANGULAR STT



Part Number	M42201R	Red
LED's	44	
Width	5.3"	
Height	3.4"	
Depth	1.8"	
DOT/SAE	J1395, J1398, J585e	
Voltage	12.8 VDC	
Amp Draw	310ma	
Legal Heading	I6S2T2	
Mounting	Grommet	
Connector	PL-3	

- 5" Rectangular STT
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector

RECTANGULAR STT



Part Number	M42213R	Red
	M42213RCL	Red Clear Lens
LED's	9	
Width	5.3"	
Height	3.4"	
Depth	1.8"	
DOT/SAE	J1395, J1398, J585e	
Voltage	12.8 VDC	
Amp Draw	190ma	
Legal Heading	I6S2T2	
Mounting	Grommet	
Connector	PL-3	

- 5" Rectangular STT
- Patented Lightning Optics
- US PATENT No. 8,009,364
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty



RECTANGULAR STT



Part Number	M42205R	Red
	M42205RCL	Red Clear Lens
LED's	10	
Width	4.6"	
Height	2.4"	
Depth	1.0"	
DOT/SAE	J1395, J1398, J585e	
Voltage	12.8 VDC	
Amp Draw	200ma	
Legal Heading	IST	
Mounting	Surface	
Connector	3 Wire Leads	

- 2 Hole Surface Mount
- 3 Blunt Cut 6" Leads
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing

RECTANGULAR STT



Part Number	M63318R	Red
	M63318RCL	Red Clear Lens
LED's	10	
Length	15.4"	
Width	1.2"	
Height	0.7"	
DOT/SAE	J1395, J1398, J585e	
Voltage	12.8 VDC	
Amp Draw	130ma	
Legal Heading	IST	
Mounting	Surface	
Connector	3 Wire 14" Leads	

- 15" Surface Mount STT
- Horizontal & Vertical 2 Hole Surface Mount
- Compact Thin Low Profile Design
- 3 Blunt Cut 14" Leads
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing

RECTANGULAR STT / BACK-UP



Part Number	M42220	
LED's	16 Red, 22 White	
Width	5.75"	
Height	6.75"	
Depth	3.25"	
DOT/SAE	J594f, J1395, J398, J593c	
Voltage	12.8 VDC	
Amp Draw	Back Up 260ma, Stop 150ma	
Legal Heading	AIRST	
Mounting	3 Stud	
Connector	3 Wire Leads	

- Three Stud Box Light
- STT / BU Functions
- Universal Design
- Built In Reflector
- High Impact Acrylic Lens
- Sealed Moisture Corrosion Proof Electronics
- Plated Brass Connector

4" ROUND AMBER PARK / REAR TURN

Part Number
M42100Y **Amber**

LED's 48
Diameter 4.25"
Depth 2.00"
DOT/SAE J1395, J222
Voltage 12.8 VDC
Amp Draw 350ma
Legal Heading I6P
Mounting Grommet
Connector PL-3

- 4" Round Amber Park/Rear Turn
- For Park / Rear Turn Applications Only
- Sealed Moisture Corrosion Proof Electronics
- HVTC High Voltage Tolerance Circuitry
- Polycarbonate Lens & Housing
- Plated Brass Connector



4" ROUND AMBER PARK / FRONT / REAR TURN

Part Number
M42322Y **Amber**
M42322YCL **Amber Clear Lens**

LED's 15
Diameter 4.25"
Depth 1.90"
DOT/SAE J1395, J222
Voltage 12.8 VDC
Amp Draw 320ma
Legal Heading I6P
Mounting Grommet
Connector PL-3

- 4" Round Amber
- Park/Front/Rear Turn
- Patented Lightning Optics
- US Patent No. 8,009,364
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty



4" ROUND AMBER PARK / REAR TURN

Part Number
M42339Y **Amber**

LED's 9
Diameter 4.25"
Depth 1.9"
DOT/SAE J1395, J222
Voltage 12.8 VDC
Amp Draw 180ma
Legal Heading I6P
Mounting Grommet
Connector PL-3

- 4" Round Amber
- Park/Rear Turn
- Patented Lightning Optics
- US Patent No. 8,009,364
- For Rear Turn Applications Only
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty



6" OVAL AMBER PARK / CLEARANCE AUX TURN

Part Number
M63100Y **Amber**

LED's 60
Width 6.40"
Height 2.20"
Depth 1.60"
DOT/SAE J222, J592e
Voltage 12.8 VDC
Amp Draw 400ma
Legal Heading PP2
Mounting Grommet
Connector PL-3

- 6" Oval Amber
- Park Clearance Aux Turn
- Maxx-Shield Protective Coating
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 100,000 Hour Rated LED Life
- Not Intended For Stand Alone Front or Rear Turn Signal



6" OVAL AMBER PARK / CLEARANCE AUX TURN

Part Number
M63420Y **Amber**

LED's 42
Width 6.40"
Height 2.20"
Depth 1.60"
DOT/SAE J222, J592e
Voltage 12.8 VDC
Amp Draw 330ma
Legal Heading PP2
Mounting Grommet
Connector PL-3

- 6" Oval Amber
- Park Clearance Aux Turn
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty
- 100,000 Hour Rated LED Life
- Not Intended For Stand Alone Front or Rear Turn Signal



6" OVAL AMBER PARK / FRONT / REAR TURN



Part Number
M63322Y
M63322YCL
M63323Y
M63323YCL

Amber
Amber Clear Lens
Amber Flange
Amber Clear Lens Flange

LED's 15
 Width 6.40"
 Height 2.20"
 Depth 1.63"
 DOT/SAE J1395, J222
 Voltage 12.8 VDC
 Amp Draw 310ma
 Legal Heading 16P
 Mounting Grommet
 Connector PL-3

- 6" Oval Amber
- Park Front Rear Turn
- *Patented Lightning Optics*
- *US Patent No. 8,009,364*
- Sealed Moisture Proof Electronics
- Solid State Circuit Board
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty



6" OVAL AMBER PARK / REAR TURN



Part Number
M63339Y
M63339YCL

Amber
Amber Clear Lens

LED's 9
 Width 6.40"
 Height 2.20"
 Depth 1.63"
 DOT/SAE J222, J1395
 Voltage 12.8 VDC
 Amp Draw 180ma
 Legal Heading 16P
 Mounting Grommet
 Connector PL-3

- 6" Oval Amber
- Park Rear Turn
- *Patented Lightning Optics*
- *US Patent No. 8,009,364*
- Sealed Moisture Proof Electronics
- Solid State Circuit Board
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty



6" OVAL AMBER SIDE TURN / SIDE MARKER



Part Number
M63120Y

Amber

LED's 18
 Width 6.40"
 Height 2.20"
 Depth 2.1"
 DOT/SAE J2039, J592e
 Voltage 12.8 VDC
 Amp Draw 450ma
 Legal Heading EP2
 Mounting Grommet

- 6" Oval Amber
- Side Turn / Side Marker
- Maxx-Shield Protective Covering
- Smart chip Surge Protection
- Sealed Moisture Proof Electronics
- Solid State Circuit Board
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty

6" OVAL AMBER SIDE TURN / SIDE MARKER



Part Number
M63121Y

Amber

LED's 28
 Width 6.40"
 Height 2.20"
 Depth 2.80"
 DOT/SAE J2039, J592e
 Voltage 12.8 VDC
 Amp Draw 370ma
 Legal Heading AEP2
 Mounting Grommet
 Connector PL-3

- 6" Oval Amber
- Ride Turn /Side Marker
- Reflector Lens
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty

5" RECTANGULAR PARK, FRONT, REAR TURN

Part Number
M42201Y **Amber**

LED's 44
 Width 5.30"
 Height 3.40"
 Depth 1.80"
 DOT/SAE J1395, J222
 Voltage 12.8 VDC
 Amp Draw 330ma
 Legal Heading I6P
 Mounting Grommet
 Connector PL-3

- 5" Rectangular
- Park Front Rear Turn
- Sealed Moisture Proof Electronics
- Solid State Circuit Board
- Polycarbonate Lens & Housing
- Plated Brass Connector



5" RECTANGULAR PARK, FRONT, REAR TURN

Part Number
M42213Y **Amber**
M42213YCL **Amber Clear Lens**

LED's 15
 Width 5.30"
 Height 3.40"
 Depth 1.80"
 DOT/SAE J1395, J222
 Voltage 12.8 VDC
 Amp Draw 300ma
 Legal Heading I6P
 Mounting Grommet
 Connector PL-3

- 5" Rectangular
- Patented Lightning Optics
- US Patent No. 8,009,364
- Park Front Rear Turn
- Sealed Moisture Proof Electronics
- Solid State Circuit Board
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty

Lightning



RECTANGULAR PARK, FRONT, REAR TURN

Part Number
M42205Y **Amber**

LED's 17
 Width 4.60"
 Height 2.40"
 Depth 1.00"
 DOT/SAE J1395, J222
 Voltage 12.8 VDC
 Amp Draw 250ma
 Legal Heading I6P
 Mounting Surface
 Connector 3 Wire Leads

- Rectangular
- Park Front Rear Turn
- Sealed Moisture Proof Electronics
- Solid State Circuit Board
- Polycarbonate Lens & Housing




2 1/2" AUXILIARY STT & PT— FOR AUXILIARY USE ONLY

Part Number
M11300RAS **Red Aux Stop**
M11300YAT **Amber Aux Turn**

LED's 3
 Diameter 2.50"
 Depth 0.80"
 DOT/SAE J592e
 Voltage 12.8 VDC
 Amp Draw 40ma
 Legal Heading P2
 Mounting Grommet
 Connector 3 Wire Leads

- 2 1/2" Auxiliary
- Aux STT Aux Turn
- Sealed Moisture Proof Electronics
- Solid State Circuit Board
- Polycarbonate Lens & Housing

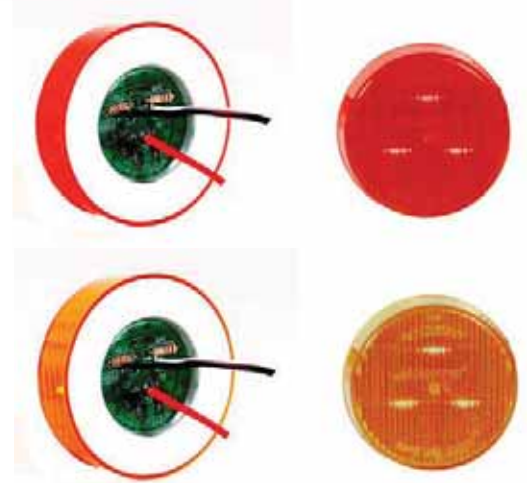

HYBRID SERIES ROUND STT / Back-Up



Part Number	
M85415R	
LED's	15
Diameter	5.75"
Depth	1.90"
DOT/SAE	J1398, J585e, J1935, J593c
Voltage	12.8 VDC
Amp Draw	190ma STT, 130ma Back Up
Legal Heading	R, 16S2T2
Mounting	Three Hole Flange
Connector	(2) PL-3

- HYBRID SERIES ROUND STT / Back Up
- Patented Lightning Optics
- US Patent No. 8,009,364
- Sealed Moisture Proof Electronics
- Solid State Circuit Board
- Polycarbonate Lens & Housing
- 5 Year Warranty



HYBRID SERIES OVAL STT / Back-Up



Part Number	
M85615R	
LED's	16
Length	8.20"
Height	3.90"
Depth	1.90"
DOT/SAE	J1398, J585e, J1935, J593c
Voltage	12.8 VDC
Amp Draw	190ma STT, 130ma Back Up
Legal Heading	R, 16S2T2
Mounting	Two Hole Flange
Connector	(2) PL-3

- HYBRID SERIES OVAL STT / Back Up
- Patented Lightning Optics
- US Patent No. 8,009,364
- Sealed Moisture Corrosion Proof Electronics
- Solid State Circuit Board
- Polycarbonate Lens & Housing
- 5 Year Warranty



GORILLA SERIES STT, PARK REAR TURN



Part Number		
M42500R	Red	
M42500Y	Amber	
LED's	40	
Diameter	4.30"	
Depth	2.10"	
DOT/SAE	J1398, J585e, J1935, J222	
Voltage	12.8 VDC	
Amp Draw	300ma Red	
	200ma Amber	
Legal Heading	16S2T2, 16P	
Mounting	Grommet	
Connector	PL-3	

- GORILLA SERIES STT, Park Rear Turn
- Extra Thick Solid State Circuit Board
- Vibration Proof
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty

GORILLA SERIES STT, PARK REAR TURN



Part Number		
M63450R	Red	
M63450Y	Amber	
LED's	42	
Width	6.40"	
Height	2.30"	
Depth	2.10"	
DOT/SAE	J1398, J585e, J1935, J222	
Voltage	12.8 VDC	
Amp Draw	250ma	
Legal Heading	16S2T2, PP2P3	
Mounting	Grommet	
Connector	PL-3	

- GORILLA SERIES STT, Park Clearance Aux Turn
- Extra Thick Solid State Circuit Board
- Vibration Proof
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty

LED DUAL VOLTAGE 12/24VDC

M50909 24V to 12V 1 Amp Step Down Module - Allows 12V lights to be used on 24V systems. See Page 40.



7" ROUND STT, PARK FRONT REAR TURN

Part Number
M90061R-DV
M90081Y-DV

Red STT
Amber PFRT

LED's 17
 Diameter 7.00"
 Depth 1.00"
 DOT/SAE J1395, J1398, J222, J585e
 J593c, J594f
 Voltage Auto Select 12/24VDC
 Amp Draw Red 210ma 12v / 90ma 24v
 Amber 390 12v /160ma 24v
 Legal Heading I6P2S2T2A Red / 16PA Amber
 Mounting Standard 4 Hole Surface
 Connector Three Wire Leads

- 7" Round STT, Park Front Rear Turn
- Auto Select 12/24VDC Voltage
- Mounting Gasket Included
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty



4" ROUND RED STT

Part Number
M42322R-DV

Red

LED's 9
 Diameter 4.25"
 Depth 1.90"
 DOT/SAE J1395, J1398, J585e
 Voltage Auto Select 12/24VDC
 Amp Draw 140ma 12v / 80ma 24v
 Legal Heading I6S2T2
 Mounting Grommet
 Connector PL-3

- 4" Round Red STT
- Auto Select 12/24VDC Voltage
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty



4" ROUND AMBER PARK / REAR TURN

Part Number
M42339Y-DV

Amber

LED's 9
 Diameter 4.25"
 Depth 1.90"
 DOT/SAE J1395, J222
 Voltage Auto Select 12/24VDC
 Amp Draw 180 12v / 100ma 24v
 Legal Heading I6P
 Mounting Grommet
 Connector PL-3

- 4" Round Amber Park/Rear Turn
- Auto Select 12/24VDC Voltage
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty



4" ROUND BACK UP

Part Number
M42324-DV

White

LED's 18
 Diameter 4.25"
 Depth 1.90"
 DOT/SAE J593c
 Voltage Auto Select 12/24VDC
 Amp Draw 180ma 12v / 110ma 24v
 Legal Heading R
 Mounting Grommet
 Connector PL-3

- 4" Round Back Up
- Auto Select 12/24VDC Voltage
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty



6" OVAL RED STT



Part Number	M63322R-DV	Red
LED's	9	
Width	6.4"	
Height	2.2"	
Depth	1.6"	
DOT/SAE	J1395, J1398, J585e	
Voltage	Auto Select 12/24VDC	
Amp Draw	140ma 12v / 80ma 24v	
Legal Heading	I6S2T2	
Mounting	Grommet	
Connector	PL-3	

- 6" Oval Red STT
- Auto Select 12/24VDC Voltage
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty



STAINLESS STEEL CLEARANCE MARKER



Part Number	M72270R-DV M72270Y-DV	Red Amber
LED's	13	
Width	6.50"	
Height	2.0"	
Depth	0.90"	
DOT/SAE	592e	
Voltage	Auto Select 12/24VDC	
Amp Draw	80ma 12v / 40ma 24v	
Legal Heading	P2	
Mounting	Surface	
Connector	PL-2	

- Stainless Steel Clearance Marker
- Auto Select 12/24VDC Voltage
- US Patent No. D514008
- Snap On Stainless Steel Bezel
- Ideal for Cab and Sleeper Panels
- Polycarbonate Lens
- Plated Brass Connector
- 5 Year Warranty



4" COMBINATION CLEARANCE MARKER



Part Number	M23015R-DV M23015Y-DV	Red Amber
LED's	14	
Width	4.0"	
Height	2.0"	
Depth	1.0"	
DOT/SAE	J592e	
Voltage	Auto Select 12/24VDC	
Amp Draw	55ma 12V / 55ma 24V	
Legal Heading	P2PC	
Mounting	Surface	
Connector	Bullet & Ring	

- 4" Combination Clearance Marker
- Auto Select 12/24VDC Voltage
- Meets P2PC Requirements
- Polycarbonate Lens & Housing
- 5 Year Warranty



2" ROUND CLEARANCE MARKER



Part Number	M09100R-DV M09100Y-DV	Red Amber
LED's	9	
Diameter	2.0"	
Depth	0.7"	
DOT/SAE	J592e	
Voltage	Auto Select 12/24VDC	
Amp Draw	70ma 12v / 40ma 24v	
Legal Heading	P2	
Mounting	Grommet	
Connector	PL-2	

- 2" Round Clearance Marker
- Auto Select 12/24VDC Voltage
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector



2 1/2" ROUND CLEARANCE MARKER



Part Number	M11300R-DV M11300Y-DV	Red Amber
LED's	13	
Diameter	2.50"	
Depth	0.7"	
DOT/SAE	J592e	
Voltage	Auto Select 12/24VDC	
Amp Draw	70ma 12v / 40ma 24v	
Legal Heading	P2	
Mounting	Grommet	
Connector	PL-2	

- Auto Select 12/24VDC Voltage
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector



LED BACK UP

For Back-Up Application Only - Other Use Will Void Warranty



4" ROUND BACK-UP

Part Number

M42347

M42348

Grommet

Dry-Fit

LED's 9
Diameter 4.25"
Depth 2.00"
DOT/SAE J593c
Voltage 12.8 VDC
Amp Draw 180 ma
Legal Heading R
Connector PL-3 or Dry-Fit

- 4" Round Back Up
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty



4" ROUND BACK-UP

Part Number

M42321

M42324

Surface Mount

Grommet

LED's 18
Diameter 4.25" Grommet
5.50" Surface Mount
Depth 2.00"
DOT/SAE J593c
Voltage 12.8 VDC
Amp Draw 160ma
Legal Heading R
Connector PL-3

- 4" Round Back Up
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty



6" OVAL BACK-UP

Part Number

M63320

M63324

Surface Mount

Grommet

LED's 18
Width 6.40" Grommet
7.80" Flange
Height 2.0" Grommet
3.3" Flange
Depth 1.6"
DOT/SAE J593c
Voltage 12.8 VDC
Amp Draw 160ma
Legal Heading R
Connector PL-3

- 6" Oval Round Back Up
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- Sealed Moisture Corrosion Proof Electronics
- Plated Brass Connector
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty



6" OVAL BACK-UP

Part Number

M63347

Grommet

LED's 9
Width 6.40"
Height 2.0"
Depth 1.8"
DOT/SAE J593c
Voltage 12.8 VDC
Amp Draw 180ma
Legal Heading R
Connector PL-3

- 6" Oval Back Up
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty



6" RECTANGULAR BACK-UP

Part Number

M42213

Grommet

LED's 18
Width 5.30"
Height 3.4"
Depth 1.8"
DOT/SAE J593c
Voltage 12.8 VDC
Amp Draw 170 Milliamps
Legal Heading R
Connector PL-3

- Rectangular Back Up
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- Smart Chip Surge Protection
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty



LED BACK UP

For Back-Up Application Only - Other Use Will Void Warranty



RECTANGULAR SURFACE MOUNT BACK-UP



Part Number	
M42205	
LED's	20
Width	4.6"
Height	2.4"
Depth	1.0"
DOT/SAE	J593c
Voltage	12.8VDC
Amp Draw	250ma
Legal Heading	R
Mounting	Surface
Connector	2 Wire Leads

- Rectangular Surface Mount
- 2 Hole Surface Mount
- 2 Blunt Cut 6" Leads
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing

RECTANGULAR SURFACE MOUNT BACK-UP



Part Number	
M63318	
LED's	19
Length	15.4"
Width	1.2 "
Height	0.7"
DOT/SAE	J593c
Voltage	12.8VDC
Amp Draw	320ma
Legal Heading	R
Mounting	Surface
Connector	2 Wire Leads

- 15" Surface Mount Back Up
- Horizontal & Vertical 2 Hole Surface Mount
- Compact Thin Low Profile Design
- 2 Blunt Cut 6" Leads
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing

7" BUS BACK-UP



Part Number	
M90450	
LED's	20
Width	7.00"
Depth	1.0"
DOT/SAE	J593C
Voltage	12.8VDC
Amp Draw	250ma
Legal Heading	R
Mounting	4 Hole Surface
Connector	Wire Leads

- 7" White Back Up Bus Light
- 4 Hole Surface Mount
- Mounting Gasket Included
- Maxx-Shield Polymer Coating
- Polycarbonate Lens & Housing
- Sealed Moisture Proof Electronics
- 5 Year Warranty

7" BACK-UP BUS LIGHT

Part Number
M90450

LED's 20 White
Diameter 7.0"
Depth 1.0"
DOT/SAE J593c
Voltage 12.8 VDC
Amp Draw 250ma
Legal Heading R
Mounting 4 Hole Surface
Connector 2 Wire Leads

- 7" White Back Up Bus Light
- 4 Hole Surface Mount
- Mounting Gasket Included
- Sealed Moisture Proof Electronics
- Maxx-Shield Protective Coating
- Polycarbonate Lens & Housing
- 5 Year Warranty



7" STOP/TAIL/TURN 7" FRONT REAR TURN

Part Number
M90061R
M90081Y

Red
Amber

LED's 17
Diameter 7.0"
Depth 1.0"
DOT/SAE J1398, J585e, J1395
J594f, J1395
Voltage 12.8 VDC
Amp Draw 290ma
Legal Heading 16P2S2T2A Red
16PA Amber
Mounting 4 Hole Surface
Connector 3 Wire Leads

- 7" Stop/Tail/Turn
- 7" Front Rear Turn
- Reflector Lens
- 4 Hole Surface Mount
- Mounting Gasket Included
- Moisture Proof Sealed Electronics
- Maxx-Shield Protective Coating
- Polycarbonate Lens & Housing
- 5 Year Warranty



5" CLEARANCE MARKER

Part Number
M27340R
M27340Y

Red
Amber

LED's 12
Width 5.20"
Height 2.13"
DOT/SAE J592e
Voltage 12.8 VDC
Amp Draw 80ma Red
60ma Amber
Legal Heading P2
Mounting 2 Hole Surface
Connector Bullet & Ring

- 5" Bus Clearance Marker
- 2 Hole Surface Mount
- Moisture Proof Sealed Electronics
- Polycarbonate Lens & Housing
- 100,000 Hour Rated LED Life



TRIANGLE COMBINATION CAB MARKER

Part Number
M20311R
M20311Y

Red
Amber

LED's 15
Width 3.30"
Height 2.60"
Depth 1.70"
DOT/SAE J592e
Voltage 12.8 VDC
Amp Draw 80ma
Legal Heading P2PC
Mounting 2 Hole Surface
Connector Bullet & Ring

- Triangle Combination Cab Marker
- 2 Hole Surface Mount
- Moisture Proof Sealed Electronics
- Polycarbonate Lens & Housing
- 100,000 Hour Rated LED Life



SQUARE CHROME DOUBLE FACE PEDESTAL



M42330R/Y



M42331R/Y



M42332R/Y



M42332RYCL



M42333RYCL



M42333R/Y

Part Number
M42330R/Y
M42331R/Y
M42332R/Y
M42333R/Y
M42332RYCL
M42333RYCL

Single Post Left Hand
Single Post Right Hand
Double Post Left Hand
Double Post Right Hand
Double Post Left Hand Clear Lens
Double Post Right Hand Clear Lens

- Square Chrome Double Face Pedestal
- High Impact Acrylic Lens
- Available Single or Double Post
- Sealed Moisture Proof Electronics
- Side Marker Reflector
- 5 Year Warranty

LED's 17 Red 19 Amber
 Width 4.7"
 Height 4.5"
 Depth 2.5"
 Function STT Red, PFT Amber, Side Marker Amber Reflector
 DOT/SAE J1395, J1398, J585e, J594f, J222, J592
 Voltage 12.8 VDC
 Amp Draw 600ma
 Legal Heading ISTEP/AP2
 Mounting Post
 Connector Three Wire Leads

ROUND DOUBLE FACE PEDESTAL



M42341R/Y



M42341RYCL



M42341Y/Y

Part Number
M42341R/Y
M42341RYCL
M42341Y/Y

Red / Amber
Red / Amber Clear Lens
Amber / Amber

LED's 6 Red 15 Amber
 30 Amber / Amber
 Diameter 4.3"
 Depth 2.0"
 Function STT Red, PFRT Amber,
 DOT/SAE R/Y J1395, J1398, J585e, J222
 Y/Y I6P
 Voltage 12.8 VDC
 Amp Draw 440ma
 Legal Heading I6PS2T2
 Mounting Post
 Connector Three Wire Leads

- Round Chrome Double Face Pedestal
- Patented Lightning Optics
- US Patent No. 8,009,364
- Polycarbonate Front & Rear Lens
- Single Post
- Sealed Moisture Proof Electronics
- 5 Year Warranty



STAINLESS STEEL ID BAR



Part Number

M20323R**Red**

LED's 24
 Width 16.3"
 Height 1.4"
 Voltage 12.8 VDC
 Amp Draw 120ma
 Mounting 2 Hole Surface
 Connector Two 12" Wire Leads

- Stainless Steel ID Bar
- Three M20320R Lights
- 2 Hole Surface Mount
- Polished Stainless Steel
- 1 Year Warranty

ALUMINUM ID BAR



Part Number

M20343R**Red****M20343RCL****Red Clear Lens****M20343Y****Amber****M20343YCL****Amber Clear Lens**

LED's 21
 Width 17.1"
 Height 1.0"
 Voltage 12.8 VDC
 Amp Draw 120ma
 Mounting 2 Hole Surface
 Connector Two 12" Wire Leads

- Aluminum ID Bar
- Three M20340 Series Lights
- 2 Hole Surface Mount
- 100,000 Hour Rated LED Life
- 1 Year Warranty

2 1/2" ROUND STAINLESS STEEL ID BAR



Part Number

M11303R

LED's 39
 Width 14.4"
 Height 1.6"
 Depth 1.5"
 Voltage 12.8 VDC
 Amp Draw 210ma
 Mounting 2 Hole Surface
 Connector Two 12" Wire Leads

- 2 1/2" Round Stainless Steel ID Bar
- Three M11300R Lights
- 2 Hole Surface Mount
- Polished Stainless Steel
- 1 Year Warranty

3/4" MINI P2PC COMBINATION CLEARANCE MARKERS



3/4" DIAMETER

Part Number	
M09300BCL	Blue Clear Lens Aux*
M09300G	Green Aux*
M09300R	Red
M09300RCL	Red Clear Lens
M09300R-3	Red 3 Light ID System
M09300WCL	White Aux*
M09300Y	Amber
M09300YCL	Amber Clear Lens
M50112	Stainless Steel Bezel
M50125	Wide Channel Grommet

* Does Not Meet P2PC Requirements For Auxiliary Use Only

LED's	3
Diameter	0.75"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	50ma
Legal Heading	P2PC
Mounting	Grommet - 3/4" Hole Cutout
Connector	2 Male .180 Bullets

- 3/4" Mini P2PC Combination CM
- Space Saving Design
- Polycarbonate Lens / Housing
- Meets P2PC Requirements for 45° Mounting
- Grommet Included
- Sealed Moisture Proof Electronics
- Optional Stainless Steel Bezel
- 5 Year Warranty



1 1/4" MINI P2PC COMBINATION CLEARANCE MARKERS



1 1/4" DIAMETER

Part Number	
M09400BCL	Blue Clear Lens Aux*
M09400G	Green Aux*
M09400R	Red
M09400RCL	Red Clear Lens
M09400WCL	White Aux*
M09400Y	Amber
M09400YCL	Amber Clear Lens
M50118	Stainless Steel Bezel

* Does Not Meet P2PC Requirements For Auxiliary Use Only

LED's	6
Diameter	1.25"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	50ma B, G, W 100ma R, Y
Legal Heading	P2PC
Mounting	Grommet - 1 3/8" Hole Cutout
Connector	2 Male .180 Bullets

- 1 1/4" Mini P2PC Combination CM
- Space Saving Design
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- Polycarbonate Lens / Housing
- Meets P2PC Requirements for 45° Mounting
- Grommet Included
- Sealed Moisture Corrosion Proof Electronics
- Optional Stainless Steel Bezel
- 5 Year Warranty



2" ROUND CLEARANCE MARKER—SOLD IN BULK PACK ONLY

Part Number

M09250R
M09250Y
M09250RCL
M09250YCL

Red
Amber
Red Clear Lens
Amber Clear Lens

- 2" Round Clearance Marker
- US Patent No.7.273.306 B2
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector



LED's 5
 Diameter 2.0"
 Depth .75"
 DOT/SAE J592e
 Voltage 12.8 VDC
 Amp Draw 40ma
 Legal Heading P2
 Mounting Grommet
 Connector PL-2

2" ROUND CLEARANCE MARKER

Part Number

M34260R
M34260Y
M34260RCL
M34260YCL

Red
Amber
Red Clear Lens
Amber Clear Lens

- 2" Round Clearance Marker
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector



LED's 6
 Diameter 2.0"
 Depth .75"
 DOT/SAE J592e
 Voltage 12.8 VDC
 Amp Draw 40ma
 Legal Heading P2
 Mounting Grommet
 Connector PL-2

2" ROUND CLEARANCE MARKER

Part Number

M09100R
M09100Y
M09100RCL
M09100YCL

Red
Amber
Red Clear Lens
Amber Clear Lens

- 2" Round Clearance Marker
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector



LED's 6
 Diameter 2.0"
 Depth .75"
 DOT/SAE J592e
 Voltage 12.8 VDC
 Amp Draw 60ma
 Legal Heading P2
 Mounting Grommet
 Connector PL-2

2 1/2" ROUND REFLECTOR CLEARANCE MARKER

Part Number

M11256R
M11256Y

Red
Amber

- 2 1/2" Round Reflector CM
- Reflectorized Lens
- Sealed Moisture Corrosion Proof Electronics
- Plated Brass Connector



LED 1
 Diameter 2.50"
 Depth .75"
 DOT/SAE J592e, J594f
 Voltage 12.8 VDC
 Amp Draw 60 Milliamps
 Legal Heading AP2
 Mounting Grommet
 Connector PL-2


2 1/2" ROUND CLEARANCE MARKER



Part Number	
M11300R	Red
M11300Y	Amber
M11300RCL	Red Clear Lens
M11300YCL	Amber Clear Lens
LED's	13
Diameter	2.50"
Depth	.75"
DOT/SAE	J592e
Voltage	12.8VDC
Amp Draw	100ma
Legal Heading	P2
Mounting	Grommet
Connector	PL-2

- 2 1/2" Round Clearance Marker
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector

2 1/2" ROUND CLEARANCE MARKER – AVAILABLE IN BULK PACK ONLY

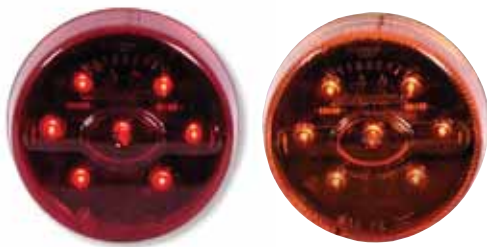

Part Number	
M11350R	Red
M11350Y	Amber
M11350RCL	Red Clear Lens
M11350YCL	Amber Clear Lens
LED's	7
Diameter	2.50"
Depth	.75"
DOT/SAE	J592e
Voltage	12.8VDC
Amp Draw	40ma
Legal Heading	P2
Mounting	Grommet
Connector	PL-2

- 2 1/2" Round Clearance Marker
- US Patent No. 7,273, 306 B2
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector

2 1/2" ROUND CLEARANCE MARKER / ABS



Part Number	
M16280R	Red
M16280Y	Amber
M16280ABS	Amber ABS
M16280RCL	Red Clear Lens
M16280YCL	Amber Clear Lens
LED's	8
Diameter	2.0"
Depth	.75"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Legal Heading	P2
Mounting	Grommet
Connector	PL-2

- 2 1/2" Round Amber ABS
- 2 1/2" Round Clearance Marker
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector



2 1/2" ROUND COMBINATION P2PC CLEARANCE MARKER – BULK PACK ONLY



Part Number	
M11260R	Red
M11260Y	Amber
LED's	7
Diameter	2.50"
Depth	0.90"
DOT/SAE	J592e
Voltage	12.8VDC
Amp Draw	100ma
Legal Heading	P2
Mounting	Grommet
Connector	PL-2

- 2 1/2" Round P2PC Clearance Marker
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector

2" VANTAGE BEEHIVE CLEARANCE MARKER

Part Number
M34600R
M34600Y
M34600RCL
M34600YCL

Red
Amber
Red Clear Lens
Amber Clear Lens

- 2" Beehive Clearance Marker
- Circular LED Pattern
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty

LED's 6
 Diameter 2.00"
 Depth 1.75"
 DOT/SAE J592e
 Voltage 12.8 VDC
 Amp Draw 40 Milliamps
 Legal Heading P2
 Mounting Grommet
 Connector PL-2



2 1/2" VANTAGE BEEHIVE CLEARANCE MARKER

Part Number
M16800R
M16800Y
M16800YCL

Red
Amber
Amber Clear Lens

- 2 1/2" Beehive Clearance Marker
- Circular LED Pattern
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty

LED's 8
 Diameter 2.50"
 Depth 2.40"
 DOT/SAE J592e
 Voltage 12.8 VDC
 Amp Draw 40 Milliamps
 Legal Heading P2
 Mounting Grommet
 Connector PL-2



2" BEEHIVE CLEARANCE MARKER

Part Number
M09105R
M09105Y

Red
Amber

- 2" Beehive Clearance Marker
- Circular LED Pattern
- Sealed Moisture Corrosion Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector

LED's 9
 Diameter 2.0"
 Depth 1.75"
 DOT/SAE J592e
 Voltage 12.8 VDC
 Amp Draw 60 Milliamps
 Legal Heading P2
 Mounting Grommet
 Connector PL-2



2" BEEHIVE CLEARANCE MARKER

Part Number
M11201R
M11201Y

Red
Amber

- 2 1/2" Beehive Clearance Marker
- Circular LED Pattern
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 10 Year Warranty

LED's 13
 Diameter 2.50"
 Depth 2.40"
 DOT/SAE J592e
 Voltage 12.8 VDC
 Amp Draw 30ma
 Legal Heading P2
 Mounting Grommet
 Connector PL-2



CHROME CAB MARKER



Part Number	
M27011Y	Amber
M27011YCL	Amber Clear Lens
LED's	8
Length	10.7"
Width	3.9"
Height	2.7"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	80ma
Legal Heading	P2
Mounting	2 Hole Surface
Connector	2 Wire Leads

- Chrome Cab Marker
- US Patent No. D527837
- Chrome Plastic Housing
- Standard 2 Hole Mount
- Polycarbonate Lens & Housing
- 5 Year Warranty

4" COMBINATION CLEARANCE MARKER



Part Number	
M23015R	Red
M23015Y	Amber
M23015RCL	Red Clear Lens
M23015YCL	Amber Clear Lens
LED's	14
Width	4.0"
Height	2.0"
Depth	1.0"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	110ma
Legal Heading	P2PC
Mounting	Surface
Connector	Bullet & Ring

- 4" Combination Clearance Marker
- Meets P2PC Requirements
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty

6" CLEARANCE MARKER



Part Number	
M20322R	Red
M20322Y	Amber
M20322RCL	Red Clear Lens
M20322YCL	Amber Clear Lens
LED's	12
Width	6.2"
Height	1.8"
Depth	1.0"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	60ma
Legal Heading	P2
Mounting	Surface
Connector	Bullet & Ring

- 6" Clearance Marker
- Stainless Steel Bezel
- Polycarbonate Lens & Housing
- Solid State Circuit Board

MINI STAINLESS STEEL CLEARANCE MARKER



Part Number	
M36180R	Red
M36180Y	Amber
M36180RCL	Red Clear Lens
M36180YCL	Amber Clear Lens
LED's	7
Width	3.0"
Height	2.0"
Depth	0.9"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	40ma
Legal Heading	P2
Mounting	Surface
Connector	PL-2

- Mini Stainless Clearance Marker
- US Patent No. D514008
- Snap-On Stainless Steel Bezel
- Ideal for Cab & Sleepers Panels
- Polycarbonate Lens & Housing
- Solid State Circuit Board

STAINLESS STEEL "PETE" CLEARANCE MARKER

Part Number

M27005R
M27005Y
M27005RCL
M27005YCL

Red
Amber
Red Clear Lens
Amber Clear Lens

- "Pete" Clearance Marker
- US Patent No. D527837
- Snap On Stainless Steel Bezel
- Ideal for Cab & Sleeper Panels
- Polycarbonate Lens & Housing

LED's 15
 Width 5.9"
 Height 2.2"
 Depth 0.9"
 DOT/SAE J592e
 Voltage 12.8 VDC
 Amp Draw 60ma
 Legal Heading P2
 Mounting 2 Hole Surface
 Connector PL-2



STAINLESS STEEL OVAL CLEARANCE MARKER


Part Number

M72270R
M72270Y
M72270RCL
M72270YCL

Red
Amber
Red Clear Lens
Amber Clear Lens

- Stainless Oval Clearance Marker
- US Patent No. D514008
- Snap On Stainless Steel Bezel
- Ideal for Cab & Sleeper Panels
- Polycarbonate Lens & Housing

LED's 13
 Width 6.5"
 Height 2.0"
 Depth 0.9"
 DOT/SAE J592e
 Voltage 12.8 VDC
 Amp Draw 60ma
 Legal Heading P2
 Mounting 2 Hole Surface
 Connector PL-2

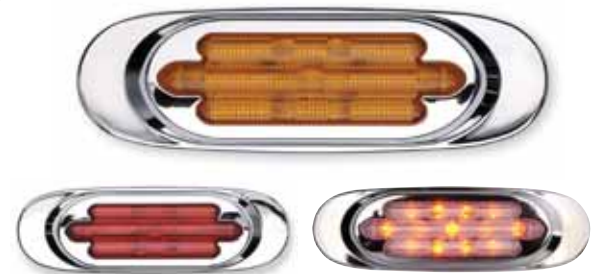

2X6 COMBINATION P2PC CLEARANCE MARKER

Part Number

M20395R
M20395Y

Red
Amber

- 2X6 Combination P2PC Clearance Marker
- US Patent No. 7,273,306 B2
- Meets P2PC Requirements
- Plated Brass Connectors
- Polycarbonate Lens & Housing

LED's 18
 Width 5.9"
 Height 2.0"
 Depth 1.8"
 DOT/SAE J592e
 Voltage 12.8 VDC
 Amp Draw 80ma
 Legal Heading P2PC
 Mounting 2 Hole Surface
 Connector PL-2



2X6 REFLECTORIZED COMBINATION P2PC CLEARANCE MARKER

Part Number

M20391R
M20391Y


Red
Amber

- 2X6 ReflectORIZED Combination P2PC Clearance Marker
- US Patent No. 7,273,306 B2
- Meets P2PC Requirements
- Modern Reflector Lens Design
- Plated Brass Connectors
- Polycarbonate Lens & Housing

LED's 7
 Width 5.9"
 Height 2.0"
 Depth 1.8"
 DOT/SAE J 592e, J594f
 Voltage 12.8 VDC
 Amp Draw 40ma
 Legal Heading AP2PC
 Mounting 2 Hole Surface
 Connector PL-2



2X6 REFLECTORIZED AUXILIARY TURN / CLEARANCE MARKER

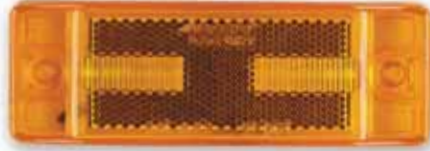

Part Number	
M20330R	Red
M20330Y	Amber
LED's	8
Width	5.9"
Height	2.1"
Depth	1.6"
DOT/SAE	J592e, J594f
Voltage	12.8 VDC
Amp Draw	20ma
Legal Heading	AP2
Mounting	2 Hole Surface
Connector	3 Bullets

- 2X6 Reflectorized Clearance Marker
- Auxiliary Turn
- Modern Reflector Lens Design
- High Impact Acrylic Lens & Housing

FLUSH MOUNT CAB LIGHT



Part Number	
M20361R	Red
M20361Y	Amber
M20361RCL	Red Clear Lens
M20361YCL	Amber Clear Lens
LED's	6
Width	4.6"
Height	2.3"
Depth	0.7"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	90ma
Legal Heading	P2
Mounting	2 Hole Surface
Connector	PL-2 Included

- Flush Mount Cab Marker
- Designed for Flush Mounting
- High Impact Acrylic Lens & Housing
- Gasket & Connector Included
- For Freightliner & Volvo*

*Freightliner / Volvo are Registered Trademarks

RECTANGULAR CLEARANCE MARKER



Part Number	
M20321R	Red
M20321Y	Amber
LED's	6
Width	3.8"
Height	2.3"
Depth	0.9"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	40ma
Legal Heading	P2
Mounting	2 Hole Surface
Connector	2 Wire Leads

- Rectangular Clearance Marker
- Designed for Surface Mounting
- High Impact Acrylic Lens & Housing
- Mounting Gasket Included
- Completely Sealed

4" X 3/4" CLEARANCE MARKER

Part Number

M20340R Red
M20340Y Amber
M20340RCL Red Clear Lens
M20340YCL Amber Clear Lens

- 4" X 3/4" Clearance Marker
- Thin-Line Design Fits Rails
- Standard 3" Mounting Holes
- Polycarbonate Lens & Housing
- Sealed Moisture Proof Electronics



LED's 7
 Width 4.0"
 Height 0.75"
 Depth 1.4"
 DOT/SAE J592e
 Voltage 12.8 VDC
 Amp Draw 40ma
 Legal Heading P2
 Mounting 2 Hole Surface
 Connector Bullet & Ring





2 1/2" RECTANGULAR CLEARANCE MARKER

Part Number

M20320R Red
M20320Y Amber
M20320RCL Red Clear Lens
M20320YCL Amber Clear Lens

- 2 1/2" Rectangular Clearance Marker
- Plugs into Existing Mounting Base
- Polycarbonate Lens & Housing
- Sealed Moisture Proof Electronics

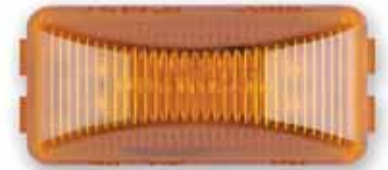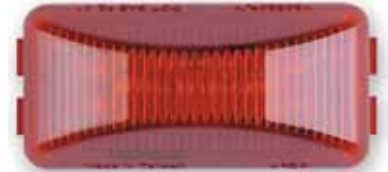

LED's 8
 Width 2.50"
 Height 1.30"
 Depth 1.00"
 DOT/SAE J592e
 Voltage 12.8 VDC
 Amp Draw 40ma
 Legal Heading P2
 Mounting Base

Mounting Accessories

- M20325** Chrome Base w/Single Lead
M20326 Black Base w/Single Lead
M20327 Black Base w/Twin Leads
M20328 Chrome Base w/Twin Leads

4" RECTANGULAR CLEARANCE MARKER

Part Number

M20350R Red
M20350Y Amber
M20350RY Dual Red/Amber
M20350RCL Red Clear Lens
M20350YCL Amber Clear Lens

- 4" Rectangular Clearance Marker
- Plugs into Existing Mounting Base
- Polycarbonate Lens & Housing
- Completely Sealed Electronics 100,000 Hour Rated LED Life



LED's 12
 Width 3.80"
 Height 1.20"
 Depth 0.90"
 DOT/SAE J592e
 Voltage 12.8 VDC
 Amp Draw 50ma
 Legal Heading P2
 Mounting Base


Mounting Accessories

- M20355** Chrome Base w/Single Lead
M20356 Black Base w/Single Lead
M20357 Black Base w/Twin Leads
M20358 Chrome Base w/Twin Leads



The New MLS Series of LED interior lighting offers excellent illumination for cabs, compartment, cargo and work spaces. With easy to install self adhesive backing. Maxxima MLS Strips can be applied to any clean surface. Available in three lengths and five colors. The MLS Series will provide reliable interior lighting with ultra low amp draw, long LED life & moisture proof construction.

- Cool White / Bright White for Best Illumination
- Warm White / Softer Warm White for Cabs & Sleepers
- Red, Blue and Amber
- Available in 18", 24" and 36" Lengths
- Space Saving Low Profile Design
- Easy to Install Self Adhesive Backing
- Completely Sealed Moisture Proof Electronics
- 5 Year Warranty — 1 Year Warranty if Applied to Exterior Surfaces

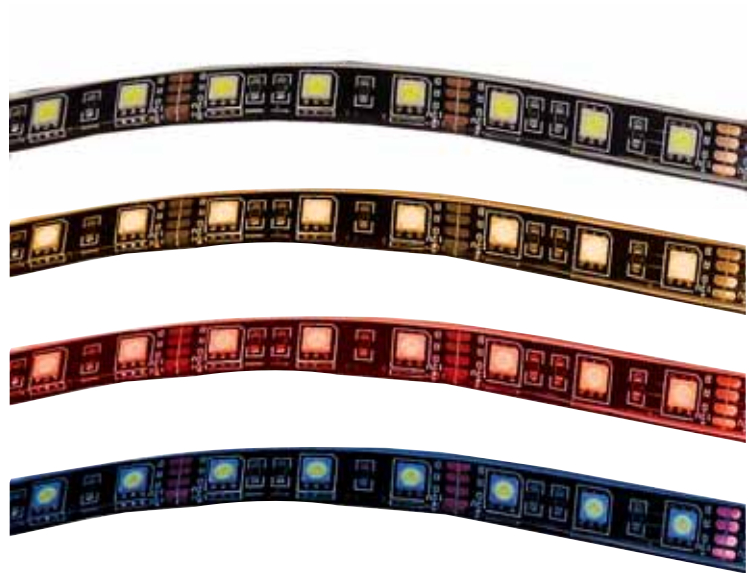

PRODUCT SPECS

Part Number	Color	Length	Width	LED's	Voltage	Amp
MLS-1827	Cool White	18"	0.50"	27	12.8VDC	560ma
MLS-2436	Cool White	24"	0.50"	36	12.8VDC	710ma
MLS-3654	Cool White	36"	0.50"	54	12.8VDC	1110ma
MLS-1827WW	Warm White	18"	0.50"	27	12.8VDC	560ma
MLS-2436WW	Warm White	24"	0.50"	36	12.8VDC	710ma
MLS-3654WW	Warm White	36"	0.50"	54	12.8VDC	1110ma
MLS-1827BL	Blue	18"	0.50"	27	12.8VDC	560ma
MLS-2436BL	Blue	24"	0.50"	36	12.8VDC	710ma
MLS-3654BL	Blue	36"	0.50"	54	12.8VDC	1110ma
MLS-1827R	Red	18"	0.50"	27	12.8VDC	560ma
MLS-2436R	Red	24"	0.50"	36	12.8VDC	710ma
MLS-3654R	Red	36"	0.50"	54	12.8VDC	1110ma
MLS-1827Y	Amber	18"	0.50"	27	12.8VDC	560ma
MLS-2436Y	Amber	24"	0.50"	36	12.8VDC	710ma
MLS-3654Y	Amber	36"	0.50"	54	12.8VDC	1110ma

CHROME MICRO INTERIOR COURTESY

Part Number

LCL-3MBR Amber
LCL-3BL Blue
LCL-3R Red
LCL-3CL White

- Interior Use Only
- Chrome Housing
- 1 Year Warranty

LED's 3
 Width 1"
 Height 0.9"
 Depth 0.4"
 Voltage 12.8 VDC
 Amp Draw 20 ma
 Mounting 2 Hole Surface
 Connector 2 Wire Leads



STAINLESS STEEL BEZEL INTERIOR COURTESY

Part Number

LED-300MBR Amber
LED-300BL Blue
LCL-300R Red
LCL-300CL White

- Interior Use Only
- Stainless Steel Bezel
- Sealed Electronics
- 1 Year Warranty

LED's 3
 Width 2.7"
 Height 1.3"
 Depth 0.6"
 Voltage 12.8 VDC
 Amp Draw 30 ma
 Connector 2 Wire Leads



SWITCHED INTERIOR FLIP LIGHT

Part Number

LED-063CL White

- Switch Built into the Lens
- Stainless Steel Bezel
- Sealed Electronics
- Hole Cut Out 3 3/16" X 1 1/8"
- Remote Switch Capability

LED's 1
 Height 2.1"
 Depth 1.2"
 Voltage 12.8 VDC
 Amp Draw 30ma
 Mounting 2 Screws
 Connector Plated Terminals
 Accessories 063CH Stainless Bezel



FLANGED COURTESY LIGHT

Part Number

LED-963MBR Amber

- 3 Hole Flange Mount
- Sealed Waterproof Electronics
- Polycarbonate Lens & Housing
- Solid State Circuit Board

LED's 9
 Diameter 3.50"
 Depth 1.1"
 Voltage 12.8 VDC
 Amp Draw 45ma
 Mounting Flange
 Connector Bullet & Ring

Accessories

R963BLK Black Snap On Bezel
R963CH Chrome Snap On Bezel
R963WH White Snap On Bezel



CHROME OVAL INTERIOR COURTESY LIGHT

Part Number

M72270WCL White

- Easy Snap On Stainless Bezel
- US Patent No. D514008
- 2 Hole Surface Mount
- Solid State Circuit Board

LED's 13
 Width 6.4"
 Height 1.9"
 Depth 0.9"
 Voltage 12.8 VDC
 Amp Draw 60 ma
 Mounting 2 Hole Surface
 Connector PL-2



RECTANGULAR OVAL INTERIOR COURTESY



Part Number	M42205WCL
LED's	10
Width	4.6"
Height	2.4"
Depth	1.0"
Voltage	12.8 VDC
Amp Draw	100 ma
Mounting	2 Hole Surface
Connector	2 Wire Leads

- 2 Hole Surface Mount
- Polycarbonate Lens & Housing
- Solid State Circuit Board

2 1/2" ROUND INTERIOR COURTESY



Part Number	M11300WCL
LED's	13
Diameter	2.5"
Depth	.69"
Voltage	12.8 VDC
Amp Draw	90 ma
Mounting	Grommet

- Fits Standard Hole & Grommet
- Polycarbonate Lens & Housing
- Solid State Circuit Board

CHROME MINI OVAL INTERIOR COURTESY



Part Number	M36180WCL
LED's	7
Width	3"
Height	2"
Voltage	12.8 VDC
Amp Draw	40 ma
Mounting	Surface

- US Patent No. D514008
- Stainless Steel Snap On Bezel
- Polycarbonate Lens & Housing
- Solid State Circuit Board

4" X 3/4" INTERIOR COURTESY



Part Number	M20340WCL
LED's	2
Width	4.0"
Height	0.75"
Depth	1.4"
Voltage	12.8 VDC
Amp Draw	20ma
Mounting	2 Hole Surface
Connector	Bullet & Ring

- Standard 3" Mounting Holes
- Polycarbonate Lens & Housing
- Sealed Moisture Proof Electronics

PROJECTOR / DRL - DAY TIME RUNNING LIGHTS



Part Number	PLB-630
LED's	3
Width	4.4"
Height	1.4"
Depth	1.4"
Voltage	12.8 VDC
Amp Draw	260ma
Mounting	Surface
Connector	2 Wire Leads

- White Projector Light
- 3 X 1 Watt White LED's
- Polycarbonate Lens
- Stainless Steel Mounting Bracket
- Black Cast Aluminum Housing
- 5 Year Warranty



Part Number	PLB-626
LED's	12
Width	4.4"
Height	1.4"
Depth	1.4"
Voltage	12.8 VDC
Amp Draw	110ma
Mounting	Surface
Connector	2 Wire Leads

- White Projector Light
- 12 White LED's
- Polycarbonate Lens
- Stainless Steel Mounting Bracket
- Black Cast Aluminum Housing
- 5 Year Warranty



Part Number	PLB-640
LED's	5
Width	7.40"
Height	1.20"
Depth	1.30"
Voltage	12.8 VDC
Amp Draw	400ma
Mounting	Surface
Connector	2 Wire Leads

- DRL Daytime Running Light
- 5 White LED's
- Polycarbonate Lens
- Stainless Steel Mounting Bracket
- Black Cast Aluminum Housing
- 5 Year Warranty

BLACK VINYL GROMMETS

<p>Rectangular M49700</p>	<p>2 1/2" M50100-B</p>	<p>2 1/2" Closed Back M50102</p>	<p>2" M50300-B</p>	<p>4" Kit M43900</p>
<p>4" M50400-B</p>	<p>6" Oval M50600-B</p>	<p>M20372 Series M50110 M50122 Wide</p>	<p>M20373 Series M50113 M50123 Wide</p>	<p>M20375 Series M50119</p>

CHROME PLASTIC GROMMET COVERS

<p>4" M50405</p>	<p>6" Oval M50605</p>	<p>Chrome Plastic Rectangular M4970 5</p>	<p>2 1/2" M50105</p>	<p>2" M50305</p>
----------------------	---------------------------	---	--------------------------	----------------------

SECURITY FLANGES - BRUSH GUARDS - BEZELS

<p>4" Stainless Security Flange M43253</p>	<p>4" Chrome Stainless Security Flange M43253CH</p>	<p>4" Chrome Stainless Steel Dress Ring M50410</p>	<p>2" Stainless Security Flange M50303</p>	<p>2 1/2" Stainless Security Flange M50103</p>
--	---	--	--	--

Stainless Grommet Cover
for M09300 Series
M50112

Stainless Steel
Grommet Cover for MWL-10
M50124

Chrome Metal
Brush Guard for
M50310

Chrome PC Bezel
for M50311

Snap On Grey
Oval PC Flange
M63253

Snap On Chrome
Oval PC Flange
M63253CH

Snap On Oval
Stainless Flange
M63254

Snap On Rectangular
Stainless Flange
M49702

Aluminum Guard
for M20340R/Y
M50312

PL-3 Right Angle STT
M50900



PL-3 OEM Pack
50 Piece Bundle
M50900-X



Dry Fit STT Connector
M50908



3-Pin Male / Female
Extension Harness
M50901



3-Pin Load Equalizer
M50905



PL-2 Right Angle CM
M50950



PL-2 OEM Pack
50 Piece Bundle
M50950-X



PL-2 Right Angle
2 Male .180 Bullets
M50951



Battery Test Pack
MBP-12V



24V to 12V
Step Down Module
M50909



3-Pin Male to Male
Grote Adapter
M50904



Electrical Grease
MEG-1



LED FLASHERS - CONVERT STANDARD LED LIGHTS TO WARNING MODE

3-Pin LED Flasher
240FPM
PF-240



LED Flasher Control Module
16 Selectable Flash Patterns
M50910



CONTINUOUS WIRE HARNESS ROLLS

M50900-100	3-Pin	12" Leads	100 Connectors Per Roll
M50950-200	2-Pin	6" Leads	200 Connectors Per Roll
M50950-100	2-Pin	12" Leads	100 Connectors Per Roll
M50960-50	Twin Female Bullet	12" Leads	50 Connectors Per Roll
M50960-100	Twin Female Bullet	12" Leads	100 Connectors Per Roll
M50960-5024	Twin Female Bullet	24" Leads	50 Connectors Per Roll



LED FLASHLIGHTS - 1 YEAR WARRANTY

Compact Light
MF-37R Red LED's



Compact Light
MF-30A White LED's



Compact Light
MF-31A Blue LED's



Slim Light
MF-26



Gorilla® Heavy Duty Light
MGF-124 Black Housing



PROMOTIONAL ITEMS

Maxxima Travel Bag
MB-91



Insulated Coolers
MaxCooler-LG
MaxCooler-MED



Reversible Rain Jacket
MJ-001
M, L, XL, XXL



Denim Shirt
MS-007
M, L, XL, XXL



Golf Shirts
MS-001 White MS-003 Light
Blue S, M, L, XL



Baseball Caps
MCAP-WH White
MCAP-NB Navy Blue



Maxxima
Display Banner
22" X 59"



Maxxima
Hand Tool Kit
HTK-1



LIMITED WARRANTIES AND PROCEDURES

Maxxima extends a Limited Warranty to the original purchaser that the products listed are free from defects in materials and/or workmanship only. Maxxima will replace any warranted product to the original consumer/purchaser if the product fails because of defects due to workmanship and/or materials within the Limited Warranty period. Limited Warranty is not transferable and applies to the original installation of the Maxxima product. This offer does not constitute in any way a product guarantee and Maxxima does not hereby assume any obligation whatsoever beyond sending a free replacement product.

LED LIMITED WARRANTY Maxxima extends a Limited Warranty to the original purchaser that the Maxxima sealed LED lamp is free from defects in workmanship and materials only. Maxxima will replace any sealed LED lamp to the original consumer/purchaser if the lamp fails due to workmanship or materials. The Limited Warranty does not apply to severe applications such as construction equipment and off-road vehicles. These examples are not all inclusive of such excluded applications. Corrosive chemicals, agents, petroleum products, and harsh cleaners are incompatible with Maxxima sealed LED lamps and their use with Maxxima sealed LED lamps will void this Limited Warranty. The LED Limited Warranty does not apply to damage associated with these products.

The Limited Warranty is not transferable and applies to the original installation of the Maxxima LED lamp for ten (10) years from the manufacturing date. Standard internal multi-pin connector integral to the lamp is covered by a five (5) year Limited Warranty.

MAXXIMA LIGHTNING, GORILLA & VANTAGE SERIES Lightning, Gorilla & Vantage Series Lights carry a five (5) year Limited Warranty.

MISUSE & IMPROPER WIRING OR GROUNDING

Maxxima LED vehicle lights are designed to operate in standard/ normal application Stop/Tail/Turn, Park/Turn and Clearance Marker modes only. Any attempt to rewire the lights to operate on the bright side, Stop or Turn mode, for prolonged use will result in overheating and damage to the product and will void this Limited Warranty. Likewise, failure to properly ground the Maxxima LED vehicle lights, improperly wiring such lights or any other misuse, abuse or unauthorized use of Maxxima products will void this Limited Warranty. Maxxima lighting is only recommended for use as originally intended by the vehicle manufacturer.

NON-VEHICLE LIGHTING All other non-vehicle Maxxima products are covered by a standard one (1) year Limited Warranty from date of original purchase. Under no circumstances will Maxxima be liable for incidental, Consequential or punitive damages whether or not the product is covered by this Limited Warranty.

PRODUCT REPLACEMENT INSTRUCTIONS

Please contact the Maxxima Sales Representative in your area or call Maxxima /Panor Corp. customer service at (631) 434-1200 option 1, or fax to (631) 434-1457 for instructions and or a Returns Goods Authorization (RGA) number. Field scrap with full credit or product replacement at Maxxima's option. Products returned must be shipped freight prepaid with the RGA number clearly marked on the outside of the carton.

ILLUMINATED AND RETAIL DISPLAYS

MMK-100
Retail Rack
61.50" X 22"



HDI-DISP-6
HYBRID
18.5" X 9.50"



HDI-DISP-7
FULL LINE
23.5" X 23"



Shown with Optional
Work Lights

HDI-DISP-8
WARNING
18.5" X 12"



HDI-DISP-10
LARGE DISPLAY
41" X 32"



Part Number	PAGE	Part Number	PAGE	Part Number	PAGE	Part Number	PAGE	Part Number	PAGE	Part Number	PAGE
LCL-3BL	37	M16280YCL	30	M20375YCL	7	M42331R/Y	26	M50950	40	M85615R	20
LCL-3CL	37	M16800R	31	M20377BCL	7	M42332RY	26	M50950-100	40	M90061R	25
LCL-3MBR	37	M16800Y	31	M20377RCL	7	M42332RYCL	26	M50950-200	40	M90061R-DV	21
LCL-3R	37	M16800YCL	31	M20377WCL	7	M42333RY	26	M50950-X	40	M90081Y	25
LED-063CL	37	M20311R	25	M20377YCL	7	M42333RYCL	26	M50951	40	M90081Y-DV	21
LED-09B-MBR	37	M20311Y	25	M20391R	33	M42339Y	17	M50960-100	40	M90450	24/25
LED-300BL	37	M20320R	35	M20391Y	33	M42339Y-DV	21	M50960-50	40	MEG-1	40
LED-300CL	37	M20320RCL	35	M20395R	33	M42341R/Y	26	M50960-5024	40	MF-26	41
LED-300MBR	37	M20320Y	35	M20395Y	33	M42341RYCL	26	M56100R	14	MF-30A	41
LED-300R	37	M20320YCL	35	M23015R	32	M42341Y/Y	26	M63100R	15	MF-31A	41
LED-963MBR	37	M20321R	34	M23015RCL	32	M42344R	14	M63100Y	17	MF-37R	41
M09100R	29	M20321Y	34	M23015R-DV	22	M42346R	14	M63120Y	18	MGF-124	41
M09100RCL	29	M20323R	27	M23015Y	32	M42347	23	M63121Y	18	MLH-11HL	5
M09100R-DV	22	M20325	35	M23015YCL	32	M42348	23	M63200R	9	MLS-1827	36
M09100WCL	38	M20326	35	M23015Y-DV	22	M42500R	20	M63200Y	9	MLS-1827BL	36
M09100Y	29	M20327	35	M27005R	33	M42500Y	20	M63253	39	MLS-1827R	36
M09100YCL	29	M20328	35	M27005RCL	33	M42700R	9	M63253CH	39	MLS-1827WW	36
M09100Y-DV	22	M20330R	34	M27005Y	33	M42700Y	9	M63254	39	MLS-1827Y	36
M09105R	31	M20330Y	34	M27005YCL	33	M42705Y-SP	10	M63318	24	MLS-2436	36
M09105Y	31	M20332R	32	M27011Y	32	M43253	39	M63318R	16	MLS-2436BL	36
M09250RCL-X	29	M20332RCL	32	M27011YCL	32	M43253CH	39	M63318RCL	16	MLS-2436R	36
M09250R-X	29	M20332Y	32	M27340R	25	M43900	39	M63320	23	MLS-2436WW	36
M09250YCL-X	29	M20332YCL	32	M27340Y	25	M49700	39	M63320R	15	MLS-2436Y	36
M09250Y-X	29	M20340R	35	M34260Y	29	M49702	39	M63320RCL	15	MLS-3654	36
M09300BCL	28	M20340RCL	35	M34260RCL	29	M49705	39	M63322R	15	MLS-3654BL	36
M09300G	28	M20340WCL	38	M34260Y	29	M50100-B	39	M63322RCL	15	MLS-3654R	36
M09300R	28	M20340Y	35	M34260YCL	29	M50102	39	M63322R-DV	22	MLS-3654WW	36
M09300R-3	28	M20340YCL	35	M34600R	31	M50103	39	M63322Y	18	MLS-3654Y	36
M09300RCL	28	M20343R	27	M34600RCL	31	M50105	39	M63322YCL	18	MRH-11	5
M09300WCL	28	M20343RCL	27	M34600Y	31	M50110	8	M63323R	15	MWL-01	6
M09300Y	28	M20343Y	27	M34600YCL	31	M50111	8	M63323RCL	15	MWL-01SP	6
M09300YCL	28	M20343YCL	27	M36180R	32	M50112	28	M63323Y	18	MWL-04	5
M09370BCL	9	M20350R	35	M36180RCL	32	M50113	8	M63323YCL	18	MWL-05SP	4
M09370R	9	M20350RCL	35	M36180WCL	38	M50114	8	M63324	23	MWL-05SPGR	5
M09370RCL	9	M20350RY	35	M36180Y	32	M50115	8	M63339Y	18	MWL-06SP	4
M09370WCL	9	M20350Y	35	M36180YCL	32	M50116	8	M63339YCL	18	MWL-07SP	4
M09370WCL-NS	5	M20350YCL	35	M42100R	14	M50118	28	M63346R	15	MWL-10SP	6
M09370Y	9	M20355	35	M42100Y	17	M50119	7	M63347	23	MWL-10SP-SM	6
M09370YCL	9	M20356	35	M42120R	14	M50120	7	M63420R	15	MWL-11HL	5
M09400BCL	28	M20357	35	M42201R	16	M50121	7	M63420Y	17	MWL-13	4
M09400G	28	M20358	35	M42201Y	19	M50122	8	M63450R	20	MWL-14	4
M09400R	28	M20361R	34	M42205	24	M50123	8	M63450Y	20	PF-240	40
M09400RCL	28	M20361RCL	34	M42205R	16	M50124	39	M72270R	33	PLB-626	38
M09400WCL	28	M20361Y	34	M42205RCL	16	M50125	28	M72270RCL	33	PLB-630	38
M09400Y	28	M20361YCL	34	M42205WCL	38	M50126	4	M72270R-DV	22	PLB-640	38
M09400YCL	28	M20372BCL	8	M42205Y	19	M50300-B	39	M72270WCL	37	R963BLK	37
M11201R	31	M20372RCL	8	M42210R	10	M50303	39	M72270Y	33	R963CH	37
M11201Y	31	M20372WCL	8	M42210Y	10	M50305	39	M72270YCL	33	R963WH	37
M11256R	29	M20372YCL	8	M42213	23	M50310	39	M72270Y-DV	22	SDL-35R	10
M11256Y	29	M20373BCL	8	M42213R	16	M50311	39	M84400	12	SDL-35Y	10
M11300R	30	M20373BRCL	8	M42213RCL	16	M50312	39	M84403	12	SDL-50-A	10
M11300RAS	19	M20373BWCL	8	M42213Y	19	M50400-B	39	M84404	12	SDL-52-A	10
M11300RCL	30	M20373GYCL	8	M42213YCL	19	M50405	39	M84405-A	12		
M11300R-DV	22	M20373RCL	8	M42220	16	M50410	39	M84406-A	12		
M11300WCL	38	M20373RWCL	8	M42320R	14	M50411	5	M84407-A	12		
M11300Y	30	M20373WCL	8	M42321	23	M50412	5	M84408	13		
M11300YAT	19	M20373WYCL	8	M42321R	14	M50413	6	M84409	13		
M11300YCL	30	M20373YCL	8	M42322R	14	M50600-B	39	M84410	13		
M11300Y-DV	22	M20374BCL	7	M42322RCL	14	M50605	39	M84411-B	11		
M11303R	27	M20374GCL	7	M42322R-DV	21	M50900	40	M84412-B	11		
M11350RCL	30	M20374PMK	7	M42322R-X		M50900-100	40	M84413	13		
M11350R	30	M20374RCL	7	M42322Y	17	M50900-X	40	M84414-BWW	11		
M11350YCL	30	M20374WCL	7	M42322YCL	17	M50901	40	M84414-BCW	11		
M11350Y	30	M20374YCL	7	M42323R	14	M50904	40	M84420	11		
M16280ABS	30	M20375BRCL	7	M42323RCL	14	M50905	40	M84421	11		
M16280R	30	M20375RWCL	7	M42324	23	M50908	40	M84422	11		
M16280RCL	30	M20375WCL	7	M42324-DV	21	M50909	40	M844280	12		
M16280Y	30	M20375WYCL	7	M42330R/Y	26	M50910	40	M85415R	20		



125 Cabot Court Hauppauge, NY 11788 USA

Tel: 631.434.1200 • Toll Free 866-MAXXIMA • Fax: 631.952.0349

info@maxxima.com • maxxima.com